



**EFFECTS OF AUTOMATION ON AIRCREW WORKLOAD AND SITUATION  
AWARENESS IN TACTICAL AIRLIFT MISSIONS**

THESIS

David R. Meyer, Captain, USAF

AFIT-ENV-MS-15-D-020

**DEPARTMENT OF THE AIR FORCE  
AIR UNIVERSITY**

***AIR FORCE INSTITUTE OF TECHNOLOGY***

---

**Wright-Patterson Air Force Base, Ohio**

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE;  
DISTRIBUTION IS UNLIMITED.

The views expressed in this thesis are those of the author and do not reflect the official policy or position of the United States Air Force, the Department of Defense, or the United States Government. This material is declared a work of the U.S. Government and is not subject to copyright protection in the United States.

**EFFECTS OF AUTOMATION ON AIRCREW WORKLOAD AND SITUATION  
AWARENESS IN TACTICAL AIRLIFT MISSIONS**

**THESIS**

Presented to the Faculty

Department of Systems Engineering and Management

Graduate School of Engineering and Management

Air Force Institute of Technology

Air University

Air Education and Training Command

In Partial Fulfillment of the Requirements for the  
Degree of Master of Science in Systems Engineering

David R. Meyer, BS

Captain, USAF

December 2015

**DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE;  
DISTRIBUTION IS UNLIMITED.**

**EFFECTS OF AUTOMATION ON AIRCREW WORKLOAD AND SITUATION  
AWARENESS IN TACTICAL AIRLIFT MISSIONS**

David R. Meyer, BS  
Captain, USAF

Committee Membership:

Maj Christina F. Rusnock, PhD  
Chair

Dr. Michael E. Miller  
Member

Lt Col Jeff Parr, PhD  
Member

## **Abstract**

In tactical aviation, decision superiority—brought upon by high situation awareness—remains the arbiter of combat effectiveness. The advancement of sophisticated avionics and highly automated cockpits has allowed the reduction of aircrew size, and in certain platforms, removal of the crew from the aircraft entirely. However, these developments have not reduced the complex and dynamic interaction between situation awareness and crew workload. While many predictive and experimental methods of evaluating workload exist, situation awareness can only be measured by conducting trials with human operators in a functional prototype. This thesis proposes an innovative methodology to predicatively determine situation awareness potential with discrete-event simulation software. This methodology measures situation awareness as both a function of task accomplishment and workload experienced. Utilizing two common but complex tactical scenarios, this method and existing workload measurement techniques can facilitate a direct comparison between a reduced-crew highly automated cockpit and a less automated “legacy” aircraft. Finally, conclusions regarding the effectiveness of replacing human operators with automation in tactical events can be made which can be tested in future experiments with actual aircraft and aircrews.

*To my family, who I owe a lot of quality time.*

## **Acknowledgments**

This work would not be complete without mentioning the efforts of my thesis advisor, Major Christina Rusnock, PhD, who patiently stuck with this proposal through many TDYs, a deployment, formal schools, the tribulations of working full time and raising a family. Without her steady guidance, not only would this body of work be less readable, but also less academically relevant, and I would have probably stopped writing long ago. I'd also like to thank Captains Delgado, Kennedy, Pedersen, and Shinaberry, who are each excellent combat aviators in their own right, and by virtue of having flown both variants of the C-130 mentioned in this thesis, are probably better subject matter experts in the intricacies and quirks of each aircraft than I am. Gentlemen, I could not have written intelligently about the "J" without your expertise. Finally to all of the friends, coworkers, and aviators who lent either advice, or more importantly, moral support: thank you.

David R. Meyer, Captain, USAF

## Table of Contents

|                                                                  | Page   |
|------------------------------------------------------------------|--------|
| Abstract .....                                                   | iv     |
| Acknowledgments .....                                            | vi     |
| Table of Contents .....                                          | vii    |
| List of Figures .....                                            | x      |
| List of Tables .....                                             | xiv    |
| <br>I. Introduction .....                                        | <br>1  |
| General Issue .....                                              | 1      |
| Problem Statement .....                                          | 3      |
| Research Question .....                                          | 4      |
| Research Focus .....                                             | 4      |
| Investigative Questions .....                                    | 5      |
| Methodology .....                                                | 7      |
| Assumptions/Limitations .....                                    | 7      |
| Implications .....                                               | 8      |
| <br>II. Literature Review .....                                  | <br>10 |
| Chapter Overview .....                                           | 10     |
| Cockpit Design/Man-Machine Interface .....                       | 10     |
| Automation .....                                                 | 15     |
| Workload Theory .....                                            | 25     |
| <i>Human Performance and Workload</i> .....                      | 26     |
| <i>Capacity and Resource Theory</i> .....                        | 29     |
| <i>Expertise</i> .....                                           | 33     |
| <i>Workload Strategies</i> .....                                 | 34     |
| <i>Workload Measurement</i> .....                                | 36     |
| Situation Awareness .....                                        | 46     |
| <i>Levels of Situation Awareness</i> .....                       | 48     |
| <i>Attention, Capacity, and Situation Awareness</i> .....        | 50     |
| <i>Workload and Situation Awareness</i> .....                    | 55     |
| <i>Cockpit Design, Automation, and Situation Awareness</i> ..... | 57     |
| <i>Situation Awareness and Decision Making</i> .....             | 60     |
| <i>Team Situation Awareness</i> .....                            | 65     |
| <i>Measuring Situation Awareness</i> .....                       | 67     |
| Description of C-130H and C-130J Aircraft .....                  | 72     |
| Discrete-Event Simulation .....                                  | 74     |



|                                                                                  |     |
|----------------------------------------------------------------------------------|-----|
| Summary .....                                                                    | 81  |
| III. Methodology .....                                                           | 83  |
| Chapter Overview .....                                                           | 83  |
| Phase I: Task Analysis .....                                                     | 83  |
| Phase II: Build Baseline Simulation Model .....                                  | 86  |
| Phase III: Perform Simulated Experiments.....                                    | 94  |
| <i>Basic Aircraft Control Model</i> .....                                        | 98  |
| <i>Scenario 1: Formation SKE Airdrop</i> .....                                   | 100 |
| <i>Scenario 2: Single Aircraft Tactical Arrival/Maximum Effort Airland</i> ..... | 102 |
| <i>Measuring Workload and Situation Awareness</i> .....                          | 103 |
| Phase IV: Analyze Results .....                                                  | 112 |
| Summary .....                                                                    | 113 |
| IV. Analysis and Results .....                                                   | 115 |
| Chapter Overview .....                                                           | 115 |
| Results of Simulation Scenarios .....                                            | 115 |
| <i>Workload Analysis</i> .....                                                   | 115 |
| <i>Situation Awareness Analysis</i> .....                                        | 132 |
| <i>Situation Awareness-Workload Relationship</i> .....                           | 142 |
| Summary .....                                                                    | 145 |
| V. Conclusions and Recommendations .....                                         | 147 |
| Chapter Overview .....                                                           | 147 |
| Investigative Questions Answered .....                                           | 147 |
| <i>Investigative Question #1</i> .....                                           | 147 |
| <i>Investigative Question #2</i> .....                                           | 148 |
| <i>Investigative Question #3</i> .....                                           | 148 |
| <i>Investigative Question #4</i> .....                                           | 149 |
| Conclusions of Research .....                                                    | 150 |
| <i>Workload Conclusions</i> .....                                                | 150 |
| <i>Situation Awareness Conclusions</i> .....                                     | 151 |
| Significance of Research.....                                                    | 152 |
| Recommendations for Action .....                                                 | 154 |
| Recommendations for Future Research .....                                        | 155 |
| Summary .....                                                                    | 157 |
| Appendix A: Description of C-130 Aircraft and Missions .....                     | 159 |
| C-130 Roles and Missions .....                                                   | 159 |
| Appendix B: Detailed Scenario Narratives .....                                   | 169 |

|                                                                               |     |
|-------------------------------------------------------------------------------|-----|
| Scenario 1: Station Keeping Equipment (SKE) Formation Personnel Airdrop ..... | 169 |
| Scenario 2: Maximum Effort Airland .....                                      | 175 |
| Appendix C: Situation Awareness Task Assessment .....                         | 181 |
| Appendix D: Task Listings and Tactical SA Assignments.....                    | 182 |
| Appendix E: UML Activity Diagrams.....                                        | 219 |
| Appendix F: IMPRINT Task Networks.....                                        | 221 |
| Basic Aircraft Control .....                                                  | 221 |
| <i>C-130H</i> .....                                                           | 221 |
| <i>C-130J</i> .....                                                           | 223 |
| SKE Formation Airdrop Scenario .....                                          | 226 |
| <i>C-130H</i> .....                                                           | 226 |
| <i>C-130J</i> .....                                                           | 230 |
| Maximum Effort Airland Scenario .....                                         | 234 |
| <i>C-130H</i> .....                                                           | 234 |
| <i>C-130J</i> .....                                                           | 237 |
| Bibliography .....                                                            | 240 |

## List of Figures

|                                                                                                             | Page |
|-------------------------------------------------------------------------------------------------------------|------|
| Figure 1: Performance-Arousal Function (Diamond, Campbell, Park, Halonen, & Zoladz, 2007; Hebb, 1955) ..... | 27   |
| Figure 2: Performance-Resource Function (Wickens C. D., 1984) .....                                         | 29   |
| Figure 3: Handling Qualities Rating Scale(Cooper & Harper, 1969).....                                       | 41   |
| Figure 4: Situation Awareness/Decision Making Model (Endsley M. R., 1988a; 1995a)                           | 48   |
| Figure 5: Workload vs. SA(Endsley M. R., 1993).....                                                         | 57   |
| Figure 6: OODA Loop(Boyd, 1995).....                                                                        | 61   |
| Figure 7: RI Pairing for C-130H.....                                                                        | 92   |
| Figure 8: Basic Aircraft Control (C-130H).....                                                              | 98   |
| Figure 9: Basic Aircraft Control (C-130J) .....                                                             | 99   |
| Figure 10: SKE Formation Airdrop scenario Plan View .....                                                   | 101  |
| Figure 11: SKE Formation Airdrop scenario Profile View .....                                                | 102  |
| Figure 12: Sample Penetration Descent Profile .....                                                         | 103  |
| Figure 13: Strategic Situation Awareness Function.....                                                      | 105  |
| Figure 14: Team SA Example.....                                                                             | 112  |
| Figure 15: C-130H, SKE Formation Airdrop scenario Workload Distribution.....                                | 116  |
| Figure 16: C-130J SKE Formation Airdrop scenario Workload Distribution.....                                 | 121  |
| Figure 17: C-130H Maximum Effort Airland Workload Distribution .....                                        | 126  |
| Figure 18: C-130J Maximum Effort Airland Workload Distribution.....                                         | 128  |
| Figure 19: C-130H SKE Formation Airdrop Strategic SA Distribution.....                                      | 132  |
| Figure 20: C-130J SKE Formation Airdrop Strategic SA Distribution.....                                      | 133  |

|                                                                          |     |
|--------------------------------------------------------------------------|-----|
| Figure 21: C-130H SKE Formation Airdrop Tactical SA Distribution .....   | 134 |
| Figure 22: C-130J SKE Formation Airdrop Tactical SA Distribution .....   | 134 |
| Figure 23: C-130H SKE Formation Airdrop Total SA Distribution .....      | 136 |
| Figure 24: C-130J SKE Formation Airdrop Total SA Distribution.....       | 136 |
| Figure 25: C-130H Maximum Effort Airland Strategic SA Distribution ..... | 138 |
| Figure 26: C-130J Maximum Effort Airland Strategic SA Distribution ..... | 138 |
| Figure 27: C-130H Maximum Effort Airland Tactical SA Distribution .....  | 139 |
| Figure 28: C-130J Maximum Effort Airland Tactical SA Distribution.....   | 140 |
| Figure 29: C-130H Maximum Effort Airland Total SA Distribution.....      | 141 |
| Figure 30: C-130J Maximum Effort Airland Total SA Distribution .....     | 141 |
| Figure 31: C-130H SA-Workload Distribution, SKE Formation Airdrop .....  | 143 |
| Figure 32: C-130J SA-Workload Distribution, SKE Formation Airdrop.....   | 143 |
| Figure 33: C-130H Maximum Effort Airland SA-Workload Distribution.....   | 144 |
| Figure 34: C-130J Maximum Effort Airland SA-Workload Distribution .....  | 145 |
| Figure 35: C-130 AMP cockpit(GAO, 2014) .....                            | 166 |
| Figure 36: Basic Aircraft Control UML Activity Diagram .....             | 219 |
| Figure 37: SKE Formation Airdrop UML Activity Diagram .....              | 220 |
| Figure 38: Basic Aircraft Control Task Network (C-130H).....             | 221 |
| Figure 39: Monitor Aircraft Performance (P) Function (C-130H) .....      | 221 |
| Figure 40: Pilot Monitoring Duties (CP) Function (C-130H) .....          | 222 |
| Figure 41: Navigate the Airplane (P/CP) Function (C-130H) .....          | 222 |
| Figure 42: Formation Position (P/CP) Function (C-130H) .....             | 222 |
| Figure 43: Navigate the Airplane (N) Function (C-130H) .....             | 222 |

|                                                                     |     |
|---------------------------------------------------------------------|-----|
| Figure 44: Scan for Threats Function (C-130H).....                  | 223 |
| Figure 45: Monitor Systems (E) Function (C-130H).....               | 223 |
| Figure 46: Listen to Radios Function (C-130H).....                  | 223 |
| Figure 47: Control the Airplane (P) Function (C-130H) .....         | 223 |
| Figure 48: Basic Aircraft Control Task Network (C-130J) .....       | 223 |
| Figure 49: Monitor Aircraft Performance (P) Function (C-130J) ..... | 224 |
| Figure 50: Pilot Monitoring Duties (CP) Function (C-130J).....      | 224 |
| Figure 51: Navigate the Airplane (P/CP) Function (C-130J) .....     | 224 |
| Figure 52: Formation Position (P/CP) Function (C-130J).....         | 224 |
| Figure 53: Scan for Threats Function (C-130J) .....                 | 225 |
| Figure 54: Monitor Systems (C-130J) .....                           | 225 |
| Figure 55: Listen to Radios Function (C-130J) .....                 | 225 |
| Figure 56: Control the Airplane (P) Function (C-130J).....          | 225 |
| Figure 57: SKE Formation Airdrop Task Network (C-130H).....         | 226 |
| Figure 58: Preslowdown Checklist (C-130H).....                      | 226 |
| Figure 59: Formation Descent Function (C-130H).....                 | 227 |
| Figure 60: Formation Turn at IP (C-130H).....                       | 227 |
| Figure 61: Slowdown Checklist (C-130H) .....                        | 228 |
| Figure 62: AWADS Update (N) Function (C-130H) .....                 | 228 |
| Figure 63: Release Point Checklist (C-130H) .....                   | 228 |
| Figure 64: Completion of Drop Checklist (C-130H).....               | 229 |
| Figure 65: Frequency Change Function (C-130H) .....                 | 229 |
| Figure 66: SKE Formation Airdrop Task Network (C-130J) .....        | 230 |

|                                                               |     |
|---------------------------------------------------------------|-----|
| Figure 67: Drop Preparation Checklist (C-130J) .....          | 230 |
| Figure 68: Formation Descent Function (C-130J) .....          | 230 |
| Figure 69: Formation Turn at IP (C-130J) .....                | 231 |
| Figure 70: Run-In Checklist (C-130J) .....                    | 231 |
| Figure 71: Release Point Checklist (C-130J) .....             | 232 |
| Figure 72: Completion of Drop Checklist .....                 | 233 |
| Figure 73: Frequency Change Function (C-130J) .....           | 233 |
| Figure 74: Maximum Effort Airland Task Network (C-130H) ..... | 234 |
| Figure 75: Descent Checklist (C-130H) .....                   | 234 |
| Figure 76: Before Landing Checklist (C-130H) .....            | 235 |
| Figure 77: On the Runway Function (C-130H) .....              | 236 |
| Figure 78: Maximum Effort Airland Task Network (C-130J) ..... | 237 |
| Figure 79: Approach Checklist (C-130J) .....                  | 237 |
| Figure 80: Before Landing Checklist .....                     | 238 |
| Figure 81: On the Runway Function (C-130J) .....              | 239 |

## List of Tables

|                                                                                                                          | Page |
|--------------------------------------------------------------------------------------------------------------------------|------|
| Table 1: Levels of Decision Automation(Hart & Sheridan, 1984) .....                                                      | 16   |
| Table 2: Levels of Human-Machine Interaction(Sheridan & Verplank, 1978;<br>Parasuraman, Sheridan, & Wickens, 2000) ..... | 16   |
| Table 3: VACP(McCracken & Aldrich, 1984) .....                                                                           | 44   |
| Table 4: Modified VACP Scale(Bierbaum, Szabo, & Aldrich, 1989).....                                                      | 45   |
| Table 5: IMPRINT VACP Values (Mitchell, 2000; Alion Science, 2013) .....                                                 | 75   |
| Table 6: C-130H & C-130J Sample Allocation of Tasks .....                                                                | 88   |
| Table 7: SA Survey Results .....                                                                                         | 107  |
| Table 8: IMPRINT Tactical SA Adjustments to SA Survey Results .....                                                      | 109  |
| Table 9: IMPRINT Tactical SA Values .....                                                                                | 110  |
| Table 10: SKE Formation Airdrop Workload Peaks (C-130H).....                                                             | 117  |
| Table 11: SKE Formation Airdrop scenario Workload Peaks (C-130J).....                                                    | 122  |
| Table 12: Summary of Workload Peaks, SKE Formation Airdrop scenario .....                                                | 123  |
| Table 13: SKE Formation Airdrop Average Workloads .....                                                                  | 124  |
| Table 14: SKE Formation Airdrop Maximum Workloads .....                                                                  | 124  |
| Table 15: T-test and Bonferroni Test of SKE Formation Airdrop Workload Data .....                                        | 125  |
| Table 16: Maximum Effort Airland Workload Peaks (C-130H) .....                                                           | 127  |
| Table 17:Maximum Effort Airland Workload Peaks (C-130J) .....                                                            | 129  |
| Table 18: Workload Peak Summary, Maximum Effort Airland.....                                                             | 130  |
| Table 19: Maximum Effort Airland Average Workload Values .....                                                           | 130  |
| Table 20: Maximum Workload Values, Maximum Effort Airland Scenario .....                                                 | 131  |

|                                                                                                     |     |
|-----------------------------------------------------------------------------------------------------|-----|
| Table 21: T-test and Bonferroni Test of Maximum Effort Airland Scenario .....                       | 131 |
| Table 22: SKE Formation Airdrop Average SA Data (C-130H).....                                       | 137 |
| Table 23: SKE Formation Airdrop Average SA Data (C-130J).....                                       | 137 |
| Table 24: T-test and Bonferroni Correction for SKE Formation Airdrop SA Data .....                  | 137 |
| Table 25: Maximum Effort Airland Total SA Data (C-130H) .....                                       | 142 |
| Table 26: Maximum Effort Airland Total SA Data (C-130J).....                                        | 142 |
| Table 27: T-Test and Bonferroni Correction of SA Data for Maximum Effort Airland<br>Scenario .....  | 142 |
| Table 28: Task Listing and Tactical SA for Basic Aircraft Control (C-130H) .....                    | 182 |
| Table 29: Task Listing and Tactical SA Values for SKE Formation Airdrop (C-130H)                    | 188 |
| Table 30: Task Listing and Tactical SA Values for SKE Formation Airdrop scenario (C-<br>130J) ..... | 196 |
| Table 31: Task Listing and Tactical SA for Maximum Effort Airland (C-130H).....                     | 204 |
| Table 32: Task Listing and Tactical SA Values for Maximum Effort Airland (C-130J)                   | 212 |



# **EFFECTS OF AUTOMATION ON AIRCREW WORKLOAD AND SITUATION AWARENESS IN TACTICAL AIRLIFT MISSIONS**

## **I. Introduction**

### **General Issue**

With the advent of new avionics technologies amidst an aging fleet of aircraft, many platforms are undergoing Avionics Modernization Programs (AMP) or block upgrades that eliminate crew positions that were integral in the original design. For example, the Navigator and Flight Engineer were common in the previous generation of many multi-crew aircraft, but are eliminated in current designs. The C-130 family, from the C-130E/H, to the AMP, to the C-130J and various special operations variants are prime examples of variable crew compliments currently in operation. The advent of Remotely Piloted Aircraft (RPA) weapon systems takes this design evolution another dramatic step forward by removing the crew from the aircraft entirely, replaced by a wireless connection. Furthermore, while most airliners operate with a two-person cockpit, the industry is beginning to study the efficacy of a one-pilot cockpit (Press Association, 2010). Similarly, the Defense Advanced Research Projects Agency (DARPA) is developing a multi-mission-capable autopilot to reduce a mission crew to just a pilot-supervisor (McDuffee, 2014).

This inevitable march towards smaller crew compliments has several recognizable benefits: reduced training costs as pipelines are closed or reduced, less money spent on aircrew salaries, fewer avionics installations required, easier crew scheduling in operational units, simplified Crew Resource Management (CRM) from fewer voices in

the cockpit, and decrease in aircraft basic operational weight leading to improved aircraft performance. However, simply deleting a crew position is not without risks. Fewer people on-board can increase workload demands of those that remain to the point of overload if cockpit design and procedures are not adjusted accordingly. Aircrew specialization disappears as more tasks merge under the pilots' responsibilities, thus the pilot must maintain a general level of expertise in the aircraft's complex systems, tactics and procedures, and has fewer avenues to outsource tasks.

Not only is crew size affecting pilots' responsibilities, but mission sets have evolved after the aircraft enters production. The C-130 has evolved into airborne firefighting, aerial spraying, helicopter air refueling, and gunship since its first flight in 1954. Even in traditional mission sets, such as airland and airdrop, operational units find new tactical applications and employment methods that may not be clearly elicited originally. For example, the advent of surface to air missiles (SAMs) have driven the C-130 to train in the low-level environment, add defensive systems, and train aircrew on lookout doctrine, thus adding more responsibilities for the aircrew (AFTTP 3-3.C-130E/H, 2010).

Aviation is a highly dynamic environment, where weather, malfunctions, and aircraft emergencies can quickly increase aircrew workload past the point of task saturation. Nowhere is this more demanding than in the tactical environment. Mission events such as low-level/terrain following navigation, unimproved/battle damaged runway operations, Night Vision Goggle (NVG) usage, chemical warfare defense, weapons employment, airdrop/aerial delivery, air combat maneuvering, and threat avoidance/defensive maneuvering create a much more demanding and unpredictable

profile than the airline industry, yet incorporate more numerous systems, design limitations (i.e. low thrust-to-weight ratio), or other factors that do not neatly fit into research conducted for single-seat fighters. Similarly, agility must be programmed into tactical airlift to develop the fledgling on-call airdrop, emergency aeromedical evacuation, Search and Rescue (SAR), and to a lesser extent, humanitarian relief mission sets.

### **Problem Statement**

Mission effectiveness is driven by decision superiority. Decision superiority is best modeled through Col John Boyd's Observe-Orient-Decide-Act (OODA) loop. The combatant that can loop the quickest with the most accuracy is the most successful and has achieved decision superiority (Osinga, 2006). While the OODA loop was first created for air-to-air combat in single seat fighters, it can readily be applied to highly random environments. Decision superiority drives mission effectiveness in such things as: success on the first pass on the drop zone or landing zone, responsiveness to time critical situations, or simply aircrew survivability. First pass success is considered one of the most important criteria on tactical missions (AFTTP 3-3.C-130E/H, 2010). This agility is a function of an aircrew's ability to process vast amounts of disparate information, form a coherent picture (known as situation awareness), and act decisively in a coherent manner. SA is dependent on the ability of human operators to manage their workload effectively. Workload management is most demanding in an unpredictable combat environment: when the aircrew is simultaneously communicating on multiple radio frequencies to disparate agencies, scanning for threats, with aircraft malfunctions while completing tactical tasks in response to mission events.

Automation, by changing the nature of human interaction with the machine, must also change the operator's ability to comprehend and react to the environment around him or her. This can be even more significant when automation replaces a human operator that was once part of a larger team. As a result of increased automations, its effects on pilot workload and situation awareness in tactical airlift missions are unknown.

### **Research Question**

Does advanced cockpit automation provide the aircrew with reduced workload and enhanced situation awareness during tactical mission events?

### **Research Focus**

The primary case study is the conventional C-130 fleet (both H and J variants). The C-130 is an ideal platform for this case study because it has been in continuous production for over 55 years, and thus has been through numerous avionics modifications and crew-size transformations which has produced a number of case studies and provided a significant collection of mission data.

This thesis will focus on the crew and configuration of the cockpit, as well as the effect the configuration of these elements on crew workload and situation awareness (SA) in events not commonly found in the commercial airline industry. This research provides analytical computer simulation of workload differences in typical C-130 missions, comparing both H and J aircraft. Furthermore, this research creates a novel methodology to quantitatively predict potential SA in a manner that facilitates direct comparison between two systems. From this simulation output, situation awareness theories can be

applied to extract how much mental capacity remains for the crew to maintain high team SA. As a result, the reader will understand how the highly automated C-130J with its reduced crew size experiences workload and SA differently than the less automated C-130H and its larger aircrew.

## **Investigative Questions**

### ***1. How does the use of automation affect workload during a Station Keeping Equipment (SKE) formation airdrop mission?***

By modeling existing operation procedures and inputs from external stimuli (i.e. radio communications to ATC agencies), it may be possible to observe and predict workload levels through computer simulation. Design of these systems have different impacts on the timing, duration, and intensity of high workload periods. Modifying the crew compliment or cockpit design alters the balance of roles and responsibilities that changes how tasks are shared. This rebalancing shifts workload peaks in both magnitude and timing. Specifically, the C-130H requires the Pilot to manually fly the aircraft while in formation, while the C-130J has the ability to maintain its formation position with the autopilot coupled. Furthermore, the C-130H crew must relay formation commands via push-button while the C-130J can do this automatically. **Hypothesis:** Automated cockpits result in lower workload than non-automated cockpits during formation airdrop.

### ***2. How does automation affect aircrew situation awareness during a SKE formation airdrop mission?***

An aircrew experiencing too much workload loses situation awareness as task demands consume mental resources. The correlation between situation awareness, task accomplishment and workload must be examined. Using the workload analysis from the

previous investigative question, a situation awareness (SA) algorithm can be created to predict SA potential. From this algorithm a time-based distribution of SA can be also compared to the workload distribution. Specifically, the C-130J releases the aircrew from manual station keeping tasks and presents a higher quantity and quality of information through the head's-up (HUD) and multifunction displays (MFD).

**Hypothesis:** automated cockpits result in higher situation awareness than non-automated cockpits during formation airdrop.

### ***3. How does automation affect aircrew workload during an airland mission?***

The C-130J has fewer crewmembers (Pilot and Copilot only) than the C-130H, thus fewer personnel to share workload. Automation places a higher emphasis on programming computers via keyboards, but can also accomplish more checklist tasks with minimal or no human input. Automation can reduce task workload or eliminate tasks altogether. **Hypothesis:** automated cockpits result in a lower workload than non-automated cockpits during airland missions.

### ***4. How does automation affect aircrew situation awareness during an airland mission?***

The C-130J presents more data via the MFD, but it can also superimpose trend data through a flight path vector in the HUD, trend lines and various parameter gates. Conversely, the C-130H relies on analog gauges, some raw computer data (presented in numerical form), manually computed parameter gates, and simply looking out of the window. **Hypothesis:** automated cockpits result in higher situation awareness than non-automated cockpits during airland missions.

## **Methodology**

The Army Research Lab (ARL) workload discrete event simulation tool, IMPRINT (Improved Performance Research Integration Tool), will be used to analytically study the effects of workload during sample tactical mission profiles. These mission profiles will simulate critical high-workload phases of flight over a tactical objective area (such as a drop zone or landing zone) and are unique to the airlift mission. Both aircraft will fly similar missions with tasks derived from checklists, regulations, and aircraft technical orders. This modeling provides quantitative data on experienced workload. Estimations can be made of available cognitive capacity that could be devoted towards situation awareness. Furthermore, the information gained by specific task accomplishment can also be figured into a situation awareness algorithm. These scenarios should demonstrate how workload and situation awareness are affected between comparable cockpit designs involving differing crew configurations.

## **Assumptions/Limitations**

This research is limited to the tactical airlift mission using of the C-130. Due to the ability of the C-130 to perform multiple missions and the complexity of modeling each member of the cockpit crew, it is not practical to simulate many specialized mission sets or even variations on common missions. The discrete event simulation will assume that all crew members have similar level of abilities, expertise, competence and speed. Workload values and task times are taken primarily from the author's experience and from the experiences of other C-130 subject matter experts. These tasks derive from checklists, Air Force regulations, and experience with common tactical employment.

This also includes intra-cockpit and external communication as well as other common tasks that may not be explicitly codified. Finally, each simulation will have the same conditions and scenarios and will not feature any abnormal or unanticipated change. It may be impossible to achieve this direct comparison during an actual tactical mission.

While a wide body of historical and operational data on the C-130 exists, obtaining, publishing and analyzing that data is problematic. Air Force Safety Investigation Boards, which provide the most detailed information about C-130 mishaps is privileged information and cannot be released. This information includes Line Operation Safety Audits (LOSA) which reveals how aircrews handle mission workloads, threats and errors related to automation and crew compliments. Observational results may or may not clearly indicate which aircrew compliment performs best in each circumstance due to wide variations of avionics designs and accompanying procedures. What empirical data exists from drop scores, maintenance capable rates, and time over target may indicate an average that could show one aircraft to be superior to the other, but the data taken by itself could not explain if the cockpit-induced workload or resultant situation awareness was the cause of the difference in performance vice some other variable, such as weather or aircrew proficiency.

## **Implications**

The results of the project demonstrate automation's impact on tactical missions and crew situation awareness in fluid, unpredictable environments. Understanding the tradeoffs in workload, performance, and situation awareness when substituting manual crew input for automation may find benefits to automation in certain circumstances, but



adverse system behaviors in other circumstances that didn't exist in legacy, less automated systems.

Second-order effects of this research might extend to tactics developments and redesigned procedures stemming from a newfound understanding of task management understood tacitly by operational units. Impacts on capabilities can be weighed against available funding to drive cost-benefit analysis when evaluating acquisitions programs. Even unit manning and personnel management through the aircrew training pipeline are affected by the replacement of the human operator with automation.

Finally, technology's caveat emptor clause may not be explicitly written in a contract or in a flight manual, but nevertheless lurks in the logic circuits waiting for human operators to expose and, hopefully, mitigate safely through superior training, judgment, and airmanship.

## **II. Literature Review**

### **Chapter Overview**

This chapter will familiarize the reader with the man-machine interaction as it relates to cockpit design, automation, workload theory, situation awareness (SA), methods of measuring workload and SA, and discrete-event simulation. A basic understanding of cockpit design and the man-machine interface addresses some advances in technology and the information interface between the aircrew and the aircraft. The biggest advent in the avionics revolution in the last generation has been the increasing capabilities and reliance on automation, which come with their own set of risks and advantages. Cockpit design affects mental workload and situation awareness, which are examined in detail. Finally, a primer on discrete event simulation concludes the chapter.

### **Cockpit Design/Man-Machine Interface**

An aircraft cockpit has a finite amount of space for controls and instrumentation. Cockpit layout is driven by mission, crew composition, and physical limitations. When the airplane was in its infancy, instrumentation was crude and the safe operation of aircraft was limited to clear weather, primarily during the day. The earliest aircraft (and some ultralights) relied so heavily on the pilot's visual perception that only a couple of instruments were included, and frequently were of the most basic variety (e.g. instead of a fuel gauge, a sight glass is used instead). Thus, when a pilot was unable to determine his position in space (altitude, attitude, speed, and course) visually due to night or adverse

weather, he could not fly his aircraft. In 1929, then-Lt. James Doolittle demonstrated the first “blind” instrument flight, including takeoff and landing, without any outside visual reference. Doolittle’s experiment was the first example of cockpit instrumentation able to provide a pilot with a three dimensional mental picture in real time (Edwards, 1988).

Basic cockpits, such as those found in early aircraft and basic general aviation only featured basic control and performance instruments. These were little more than a standard “six pack”: attitude, compass, altimeter, vertical velocity, airspeed, turn and slip, and a few engine instruments, fuel, and battery gauges. When aircraft grew more complex, they added more systems, navigation, performance, and mission-specific instruments. Naturally, a multi-engine aircraft requires identical sets of instrumentation for each engine. Extra radios and navigation equipment are innovated or added for enhanced mission capability. Each device, instrument, and control interface added to the cockpit consumes available space. Clearly, this physical design space is limited in fighter-type cockpits. Even large multi-crew aircraft have finite space for the multitude of instruments, even with the inclusion of side and overhead panels. This sometimes exceeds 400 distinct gauges and instruments for some commercial airliners (compared to 3 instruments on the original Wright Flyer) (Adams & Pew, 1990; Lovesey, 1995). Thus, it can easily grow beyond the capability of any one person to physically reach all of switches and controls, or even view the instrumentation.

As cockpits evolved, new “black boxes” were added: autopilot, radar, weapons systems, mission sensors, navigational aides, computers, etc. While many of the additions undeniably provided the aircrew with more information and solved specific problems, many were added in a piecemeal fashion as an upgrade to existing technology

and presented the aircrew with fragmented information. In some instances, these upgrades substituted existing equipment (e.g. upgrading and replacing a radar), but others were new additions to the cockpit. The legacy C-130H1 is a good example of post-production upgrades literally bolted onto existing instrument panels as aircraft capabilities evolved (Appendix A: Description of C-130 Aircraft). Additions, such as the Station Keeping Equipment (SKE) Plan Position Indicator (PPI), or “SKE Scope,” mounted prominently on the pilots’ instrument panel, obscure visibility through the center windscreen. Other equipment add-ons, from relatively low-tech aircraft armor, to Traffic Collision and Avoidance Systems (TCAS), to data-links, laptops, and moving map displays all consume some amount of physical design space and affect ergonomics as well as the operator’s ability to view and manipulate the controls and displays included as a part of these design changes. Hence, a trend has been to completely redesign the cockpit holistically around state-of-the-art avionics versus making piecemeal changes (this captures the evolution of the C-130E/H to the C-130H3 to the C-130J).

Improvements in computing and information technology have led to cockpits that rely on round-dial “steam gauges” in a backup role, if at all. Instead modern cockpits are designed to use multifunction displays (MFD), commonly referred to as a “glass cockpit.” By harnessing an integrated data bus, the avionics architecture can be controlled through a central processor or mission computer and data can be passed in any combination between sensors and displays. Instead of controlling components individually using different interfaces, a common design element in modern cockpits is a Flight Management System (FMS) that serves as a central input/output interface. Most,

if not all, data inputs could be made through a central (or pilot/copilot redundant) keyboards, while any variety of raw data can be displayed at the point of interface.

Glass cockpits allow more information (and more disparate forms of information) formatted on the same display space. Instead of requiring a display dedicated solely to an instrument, an MFD can creatively combine a multitude of information in the same space, while different data “layers” allow the operator to choose completely different data sets (i.e. a pilot can cycle from an attitude-centric display, to a system status display, to a navigation display, to a radar or moving map, etc.). New technologies, such as Heads-Up Display (HUD) allow for the display of information in the same field of view as the windscreen, thus allowing the pilot to look at a target (such as a runway) while referencing flight parameters (Haynes, 1998). These displays can use color coding, graphics and other symbology to enhance the quantity and quality of information.

In addition to HUDs and MFDs, other innovations of fully digital and glass cockpits include datalink, data-bus integration, fly-by-wire, enhanced terrain awareness, more capable autopilots, and improved ergonomic controls. Digital datalinks allow the passing of primarily text-based information that once could only be communicated via verbal radio transmissions. Thus, considerably more information can be relayed to the aircrew in a shorter time-span, with greater fidelity and detail, and without the same short-term memory and transcription limitations of voice-text. Aircrews crossing oceans relied on making position reports and receiving clearances by listening to scratchy and weather-distorted HF radios. With Selective Calling (SELCAL), air traffic control can “ping” the aircraft to listen to the HF radio, thus reducing the fatigue associated with

actively listening to that radio for hours. Further advances in technology allow aircrews to skip SELCAL and HF radio all-together and pass text messages through the FMS.

Related to data-sharing, modern digital cockpits feature data busses that seamlessly pass and fuse information from one component to another. Analog and transitional cockpits possess a limited capacity to share data between components. Putting the vast majority of the cockpit on an integrated data bus represents a revolutionary step in cockpit design and allows an individual aviator to call up and manipulate a wider variety of data.

The capability of the autopilot has evolved from a simple “wing-leveler” to the point where an autopilot coupled to autothrottles can autonomously fly an instrument approach and land in zero visibility. Display and ergonomic improvements put more data and control literally at the pilot’s fingertips. One key improvement in fighter aircraft lethality is Hands On Throttle-And-Stick (HOTAS): moving more control functionality over communications, systems, sensors, and weapons onto the flight controls and minimizing time spent searching for and reaching for switches in the cockpit.

In sum, designing a glass cockpit requires more careful considerations from the engineer. Simply adding automation or new display technologies is not a panacea for human-machine interaction, particularly if that interaction is too rigid (Secarea, 1990). While it is possible to present pilots with more data, information overload is a significant concern in modern cockpits (Hart & Sheridan, 1984; Secarea, 1990). Poorly designed and integrated interfaces increase the workload and time needed to synthesize information and open opportunities for larger errors and confusion (Secarea, 1990). Conversely, a smartly designed glass cockpit improvement can reduce workload by simplifying steps

required to manipulate instrumentation. Even the best designed cockpit displays and controls cannot overcome human performance limits (Hart, 1988). Provided that the operator does not have to flip through multiple layers to find this data or obscure the necessary information in a sea of data, modern displays provide more data in a richer format. Because glass cockpits rely much more on integrating display layers and inputs primarily through an Flight Management System (FMS) or keyboard, instrument manipulation that once consisted of twisting a dial or a couple of switches might now require paging through multiple display layers and a series of keyboard entries—all with an associated increase in workload and delay in time.

## **Automation**

Automation is when a task is performed by a computer or machine instead of a human. Automation is prevalent in everyday life. While the term conjures thoughts of sophisticated computers, other everyday machines—ATMs, smoke detectors, elevators, automobile starter motors—are all examples of automation because they replace a function that a human once performed or could perform adequately (Parasuraman & Riley, 1997). As such, there exists a continuum of automation that provides the human operator with varying levels of control (Hart & Sheridan, 1984; Secarea, 1990). At the lowest end (no automation) is complete manual decision making and control by the human operator. Increasing levels of automation perform information management functions first, such as memory jogging or prompting, then serves as a decision and action assistant followed by full automation (Boys & Palko, 1988; Endsley M. R.,

1988b). Automation can exist as a decision aide along multiple levels defined in Table 1 and Table 2.

**Table 1: Levels of Decision Automation(Hart & Sheridan, 1984)**

|                                                                                                 |
|-------------------------------------------------------------------------------------------------|
| 1. Automated system suggests alternatives for operator to consider or ignore                    |
| 2. Automated system lists alternatives from which operator must decide and execute manually     |
| 3. Automated system lists alternatives from which operator must decide, but system executes     |
| 4. Automated system makes decision and but informs operator, who can intervene before execution |
| 5. Automated system makes decision and executes, only informing operator after the fact         |

**Table 2: Levels of Human-Machine Interaction (Sheridan & Verplank, 1978)**

| <b>Levels of Human-Machine Interaction</b>                                                                                                                         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1. Human does all planning, scheduling, optimizing, etc. and turns task over to computer for deterministic execution                                               |
| 2. Computer provides options but human chooses between them, plans the operations, and then turns tasks over to computer for execution                             |
| 3. Computer helps to determine options, and suggests one for use, which the human may or may not accept before turning task over to the computer for execution     |
| 4. Computer elects options and plans actions, which human may or may not approve; computer can reuse options suggested by human                                    |
| 5. Computer selects actions and carries it out if human approves                                                                                                   |
| 6. Computer selects options, plans, and actions; displays them in time for the human to intervene, and then carries them out in default if there is no human input |
| 7. Computer does entire task then informs human of action                                                                                                          |
| 8. Computer does entire task and informs human upon request                                                                                                        |
| 9. Computer does entire task and informs human if it believes human needs to know                                                                                  |
| 10. Computer performs entire task autonomously; human is ignored and must trust computer in all aspects of the decision-making                                     |

While there are ten levels of human-machine interaction, they can be classified in four main groups: information acquisition, information analysis, decision selection, and action implementation (Parasuraman, Sheridan, & Wickens, 2000). Information acquisition supports human sensing by controlling sensors and the registration of input



data. This could be a radar scan pattern, “lock on,” or automatic focusing. Information analysis filters raw data into something more contextual and therefore is useful for the human operator. In this case raw data is converted to symbology and certain performance characteristics are analyzed (e.g. a radar return has position, range, course and altitude data associated). Decision selection augments human decision abilities by presenting a desired choice to the human without taking that action. In many cockpits the flight director presents a desired heading and/or attitude correction to the pilot to correct back to the desired course and altitude. However it is the pilot’s choice to follow the flight director’s cue or choose another alternative. If the autopilot was coupled to the flight director, then the automation executes the flight director’s command, which implements the desired action. Of course a system, such as an aircraft, should change groups or adapt automation to the most appropriate level through the course of the mission (Parasuraman, Sheridan, & Wickens, 2000; Endsley M. R., 1996).

Just because something can be automated does not necessarily mean that it should (Wiener & Curry, 1980). While it may lead to legitimate cost savings or be inexpensive to automate a particular subsystem, whole system performance must be taken into consideration (Parasuraman, Sheridan, & Wickens, 2000). Automation can eliminate human tasks in some circumstances, but add new tasks or increase workload in others (Colombi, Miller, Schneider, McGrogan, Long, & Plaga, 2011). Automation can provide several advantages to the human operator. For instance, complex mathematical calculations, system monitoring and warnings (potentially leading to earlier detection of failures), fuel efficiency, consistent repetitions of mundane and routine tasks (i.e. cruise control or maintain a constant altitude) are good automation candidates (von

Tiesenhausen, 1982; Johnson, Bersheder, & Leifer, 1983). Information overload, especially dynamic information, can be filtered for relevance and urgency, or simply organized into more coherent form (Parasuraman, Sheridan, & Wickens, 2000). Precision afforded by automation could add new and more sophisticated/complex mission sets that either were not possible before, required more operators (i.e. a larger crew compliment), or was extremely taxing to the human operator(s) (National Research Council, 1982). An example of this is the MC-130H terrain following mission where a radar generated and computer calculated “cue” allows the aircrew to fly nap-of-the-earth missions accurately based on real-time aircraft performance with tighter tolerances and lower average altitudes than visual references alone (TO 1C-130(M)H-1, 2013).

In these situations, automation reduces operator workload, increases reliability, improves precision, improves safety by reducing human error, or a combination of these factors (Hart & Sheridan, 1984; Billings, 1991; Wiener E. L., 1985b). For instance, research into a synthetic vision upgrade to standard HUDs showed both improved performance (as measured by course and altitude deviations), better situation awareness, and a reduced incident of collision with terrain when used with approaches in instrument meteorological conditions (IMC) (AFRL, 2002). By reducing operator workload, fatigue accumulates more slowly, and the operator has more capacity to perform other, more critical tasks. Well-designed automation in modern, “intelligent” cockpits can serve as an assistant to the pilot just as if there was another crew member onboard (Secarea, 1990). In effect automation does not simply supplant human action, but can change human behavior (Parasuraman & Riley, 1997).

While automation easily replaces physical or manual control activities, the operator must monitor, supervise, and program these systems. This merely substitutes physical for mental workload, and despite removing skills, still requires a human operator to supervise (Endsley M. R., 1996). Furthermore, operators may potentially lose manual skills, systems knowledge, and even job satisfaction (Hart & Sheridan, 1984; Johnson, Bersheder, & Leifer, 1983). Automation itself lends another dimension of complexity to already complex endeavors. Operators must understand the automation's logic, functionality, and responsibilities, as well as its limits and operating parameters (Endsley M. R., 1996). Pilots have reported difficulties understanding what their aircraft automation is doing and why (Wiener E. L., 1989). This lack of appropriate communication has led to distrust, or at a minimum, confusion (Endsley M. R., 1996).

Dependency interactive automation elements may cause fixation to the neglect of other duties. For example, because HUD information can be so rich, yet in a narrow field of view, pilots can succumb to HUD dependency and must learn to look elsewhere outside (Haynes, 1998; Shinaberry, 2013; Kennedy, 2015). The precision afforded by an automated aircraft could become relied upon so heavily that a mission set is not able to be performed should that system fail or the mission set vary from the missions for which the automation was designed. For example, the C-17 depends on the Heads-Up Display (HUD) such that both pilot and copilot HUDs are required for short-field landings (Haynes, 1998; Rabbitt, 1998). Therefore the failure of either system can result in mission failure.

Continued use of automation can lead to human inactivity and complacency in the automated system (Hart & Sheridan, 1984). Inactivity may lead to inattention when the

operator should be supervising a highly-trusted system instead, cognitively (sometimes literally) putting the pilot to sleep (Secarea, 1990). Even more benign, pilots accustomed to more manual modes of flying feel psychologically distanced, or out-of-the-loop, from automated cockpits and processes being performed behind the veil of autonomy (Adams & Pew, 1990; Endsley M. R., 1996). A lack of vigilance can cause inattention due to a over-trust, a subtle, undetected error that seems reasonable, or simply because humans serve as poor passive monitors of automation (Billings, 1991; Parasuraman R. , 1987).

Complacency becomes pervasive if the operator views their role as passive with the operator becoming a passenger in his own aircraft (Hart & Sheridan, 1984). This is a function of operator trust (or over-trust) in automation and can lead to inattention or a lack of vigilance (Danaher, 1980; Parasuraman, Molloy, & Singh, 1993; Wiener E. L., 1985b). This lack of vigilance may be influenced by workload strategies employed by the operator to shift attention towards other tasks (Endsley M. R., 1996; Parasuraman, Mouloua, & Molloy, 1994). However, a lack of trust in automation may contribute to its non-usage or ignoring cues. For example, aircrews will ignore automatic alarms if they occur frequently enough to be considered erroneous or a nuisance (Billings, 1991; Wiener & Curry, 1980).

While automation itself may be inherently safe, it can contribute to hazardous attitudes: misuse (using it when it should not be used or improperly monitoring), disuse (not using available automation), or abuse (inappropriate use of automation) (Parasuraman, Sheridan, & Wickens, 2000). Automation, and the failure to monitor it properly, has been a factor in several accidents (Parasuraman & Riley, 1997; Endsley M. R., 1996). A highly automated Airbus A330-200, Air France 447, stalled and crashed

due to pilot error related to pitot tube icing. This created erroneous airspeed indications which promptly disconnected the autopilot and autothrottles while also changing automation logic and protections. As these changes were not communicated to the pilots, they became severely confused as to what information was valid and what logic mode the automation was operating in. Because of their high dependency on automation and comfort flying an aircraft designed to eliminate pilot-error with automatic protections, when these protections were removed, the pilots found themselves unable to recover with manual flying (BEA, 2012). Thus, in an attempt to eliminate pilot error via automation, the heavy reliance on such a system allowed basic manual flying skills, such as stall detection and recovery, to erode dangerously.

Fatal over-reliance and mode confusion are not limited to just this accident. A Boeing 777 crash at San Francisco International Airport, Asiana Flight 214, was due to the aircrew believing the auto-throttles were engaged when they were in a manual mode—a condition called mode confusion. The aircrew had trusted a system that was not engaged and failed to monitor a decay in airspeed due to the throttles being left in idle until a stall developed at very low altitude and just prior to the runway (NTSB, 2014). Another similar crash related to accidental autothrottle disengagement occurred to a US Air 737 (NTSB, 1990). Mode confusion led the aircrew of the airliner to climb at a constant vertical speed until it stalled at high altitude (NTSB, 1980; Wiener E. L., 1985a). Overconfidence in automation's reliability killed nearly everyone on a DC-9 when the aircraft attempted a no-flap takeoff. In this case, the crew had implicitly relied on a warning system that had failed and neglected to manually verify the position of the flaps (NTSB, 1988). Operator distrust (and disregard) in the significance of angle of attack

warnings led to an accelerated stall and total loss of a C-17 (Everhart, 2010). American Airlines 965, a Boeing 757, and Air Inter 148, an Airbus A320, crashed from controlled flight into terrain (CFIT) due to improper data entered into the autopilot (Hall, 1996; FAA). The inability of the crew to manually override the autopilot and mode confusion was causal to the *Exxon Valdez* oil spill (Wiener E. L., 1989).

While each incident was ultimately attributed to pilot error and is much more complex than described above, automation mode confusion, over-reliance, or distrust of information was causal in each incident. However, it would be unfair to label automated aircraft as inherently unsafe, since operator training is a significant factor in both accidents caused and prevented. Aircraft accident literature abounds with examples of incidents involving aircraft flown manually or with less automation available. Attempts to manually override automated safeguards, such as speed limits and stall recovery devices have resulted in accidents in both railroads and aviation—accidents automation was designed to prevent (Parasuraman & Riley, 1997). While automated systems are intended, among other things, to reduce pilot error, they cannot completely eliminate error (especially input error) and can induce new sources of error.

Poor design or usage of automation subjugates the operator to perform menial tasks to support the machine (Johnson, Bersheder, & Leifer, 1983; von Tiesenhausen, 1982). Even worse, automation may delay the response to unplanned, abnormal situations by either masking the cause-effect relationship, restricting feedback, or adding tasks required to take action (Hart & Sheridan, 1984; Endsley M. R., 1996; Norman D. A., 1989; Billings, 1991). Automation or systems failures increase pilot stress and workload greater than similar failures in less automated systems (Hart & Sheridan, 1984).

This can be due to the amount of data or control lost during an automation malfunction, the quantity of tasks or button-pushing required to remedy the situation, or the operator's dependence on the automated system. During normal operations, automation can become the distracting object of attention instead of an in-flight assistant due to poor interface design, programming or operating difficulty, lag time, software bugs or user error (Adams & Pew, 1990). Even in normal operation, a majority of pilots felt that automation increased workload due to manipulation and reprogramming requirements (Wiener E. L., 1985a; 1989; Parasuraman & Riley, 1997; 2000).

To effectively use automation, operators should consider the appropriate level of automation for the situation at hand. This may entail selecting a higher level of automation to deal with a more urgent task priority or deselecting and performing a task manually when fixing automation imposes an unacceptable time penalty. System designers should allow for the operator to override automation, where appropriate, and incorporate adaptive levels of automation for the operator to choose from. Ideal candidates for automation include:

- Low level, repetitive, and menial tasks
- Tasks that require long attention spans (i.e. systems and sensor monitoring)
- Data fusion from disparate sensors into a combined display/overlay
- Intense or recurring computing tasks
- Tasks requiring little mental effort yet provide immediate feedback
- Basic decision making within a well defined, constrained, set of rules.

Tasks that involved abstract thought, complex decision making, critical thinking, planning, and problem solving are better left to the human operator (Hart & Sheridan, 1984; von Tiesenhausen, 1982; Johnson, Bersheder, & Leifer, 1983). This potentially creates a dilemma where those tasks that invoke the least mental workload are easily automated (simple transit and navigation), while those tasks that impose the highest mental workload (complex planning, emergencies, communications) or are hard, expensive, or impossible to automate are left to the human (Colombi, Miller, Schneider, McGrogan, Long, & Plaga, 2011; Parasuraman, Sheridan, & Wickens, 2000). Ideally, automation should free operators from the boring, mundane, and time-consuming tasks, enabling them to perform more critical tasks (Hart & Sheridan, 1984; National Research Council, 1982).

Proper automation design and control should result in an acceptable workload such that the operator is engaged and involved with flight tasks. The aircrew must be free to perform necessary planning and other high-level functions as appropriate, yet flexible to respond to time-critical tasks. System engineer's goals should be to reduce system complexity to enhance operator performance and use automation where it can be most beneficial (or use automation most appropriately) while preventing information overload (Mitchell, 2000).

Pilots are concerned that automatic systems can implement decisions without their consent (Secarea, 1990). From 2010 to 2014, there were 53 aircrew initiated safety reports of automation overriding the crew (NASA, 2014). In a survey of airline pilots, fully automatic control without override ability was universally detested, while most pilots preferred either a management-by-consent (similar to Sheridan & Verplank's levels



4 and 5 of automation) or management-by exception (level 6) form of automation, depending on the situation (Olson & Sarter, 1998). Achieving the proper level of automation in the cockpit is a function of cockpit design, Crew Resource Management (CRM) training (not described in this thesis), and training tailored to that specific aircraft.

## **Workload Theory**

Aircrew workload, specifically the pilot's workload, has been a design concern in complex aircraft for years. As automation technology matured in the 1980s, the relationship between automation management and operator workload began to be studied in earnest. Mental workload itself is a complex phenomenon, a consistent definition of which has not reached consensus (Hart & Sheridan, 1984; Secarea, 1990; Kantowitz & Casper, 1988; Mitchell, 2000). Mental workload can be expressed in several different ways. It may be partially characterized as "time pressure" or comparing the actual time available against the perceived time available (Sheridan & Stassen, 1979). It could be a task-dependent measure of cognitive bandwidth (Secarea, 1990; Hart & Sheridan, 1984). It can also be defined as a function of time load, mental effort, and psychological stress (Reid, Potter, & Bressler, 1989; Reid & Nygren, 1988).


For the purpose of this thesis, mental workload is the relationship between an operator's mental capacity and the required attentional resources needed to perform a task (Hart & Staveland, 1988). Workload should not be confused with *task load*, which is an expression of the quantity of tasks performed in a finite period of time (thus incorporates an element of time pressure). *Task demand* reflects difficulty and is the level of effort required by the task. Therefore, workload is a combination of task load and task demand.

An operator could have a low task demand yet a high task load if they are performing many simple tasks. Conversely, the operator may experience the same workload if it involves high task demand yet low task load (few tasks, but they require a large amount of cognitive resources). Even for a given task, the experienced workload can vary between operators since each may have different capacities. Capacity is a function of the individual traits, environment, fatigue, operator experience, level of training, proficiency, workload strategy, and stress (Hart & Sheridan, 1984; Curry, Jex, Levison, & Stassen, 1979; Childress, Hart, & Bortolussi, 1982). Stress is a function of the confusion, frustration and anxiety associated with the task (Reid, Potter, & Bressler, 1989). In addition to psychological stressors, physiological stress—G's, turbulence, motion sickness, temperature, and equipment-induced stress—affect aircrew, particularly in tactical or combat scenarios (McDaniel, 1996).

### ***Human Performance and Workload***

There is no simple relationship between human performance and workload (Sheridan & Stassen, 1979). The concept of arousal affecting performance was first studied by introducing rats to electrical shocks to facilitate simple discrimination tasks. Thus the rats learned faster when stress was increased, up until a point (Yerkes & Dodson, 1908). Later research theorized human performance is a function of arousal, with increasing arousal leading to increased cognitive performance (Hebb, 1955). Performance can be low in a low workload situations (a condition called *underload*) if the operator is not sufficiently aroused, committed, or under-resourced the task. Conversely, performance can be maintained at a high (or increasing) level as arousal (i.e. workload) increases from low to high (Figure 1). Generally, performance increases as more

operator resources (i.e. effort) are invested in the task until the point where no further increase is possible. Thus, capacity can be said to increase as arousal increases in a function attributed as the Hebb-Yerkes-Dodson Law (Kahneman, 1973). Workload, urgency, significance, and enjoyment all affect arousal level. Even a relatively low-demand task sparks arousal if successful completion becomes a matter of life-and-death (McDaniel, 1996).

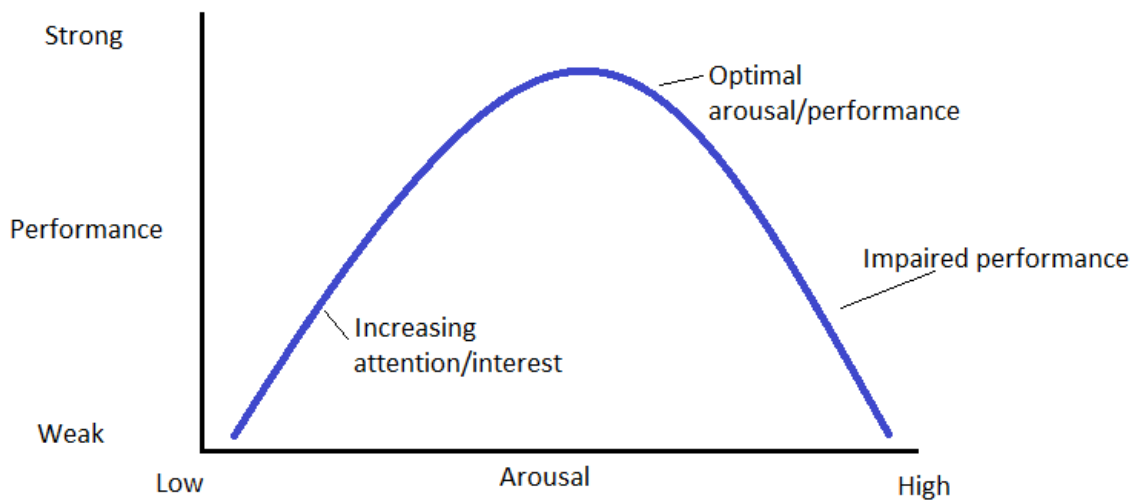

**Figure 1: Performance-Arousal Function (Diamond, Campbell, Park, Halonen, & Zoladz, 2007; Hebb, 1955)**

*Overload* is the condition when the operator's workload exceeds mental resource capacity. When the operator becomes overloaded, performance deteriorates rapidly (Kahneman, 1973; Hart & Sheridan, 1984). However, it is not possible to define an overload "redline" that is true for all cases and conditions because operator capacity covaries with both the task at hand and the operator's skillset (Wickens C. D., 1984; 2002). This phenomenon may be described as the performance-resource function (Figure 2). Below this point, the performance curve may be said to be resource limited since

more resources results in improved performance. From that point until 100% resources are committed to the task, it is said to be data-limited because performance cannot increase no matter how hard one tries (Wickens C. D., 1984; 2002; Norman & Bobrow, 1975). Conversely, a low difficulty task simply cannot demand a high level of effort beyond what is required for a zero-error rate (Kahneman, 1973). The concept of *underload*, where an operator is not sufficiently aroused can lead to boredom or complacency. Complacency can lead to task failure, even in low task demand, when an operator views that task in low regard and invests insufficient or no resources at all. For instance, an experienced tactical pilot can become complacent and fly the aircraft into the ground (McDaniel, 1996).

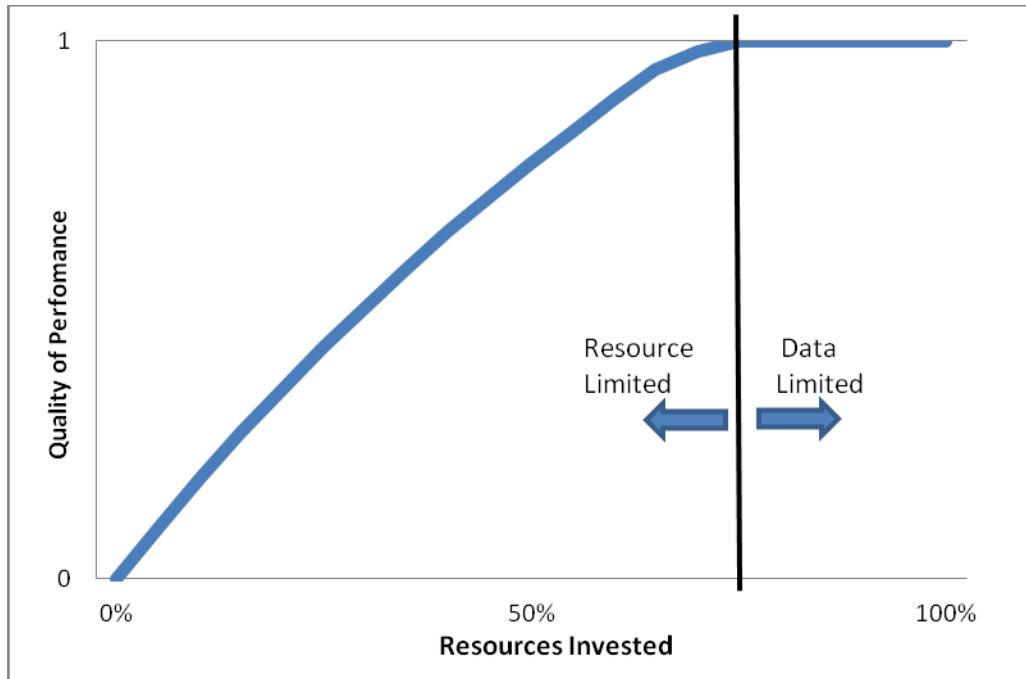


Figure 2: Performance-Resource Function (Wickens C. D., 1984)

### *Capacity and Resource Theory*

Workload could be said to be proportional to task demands imposed on an operator's capacity, inferring that an increase in operator capacity (i.e. training, experience, etc.) can have similar effects as reducing task load (Wickens C. D., 2002; Rolfe, 1971). A given operator has a limited capacity to devote mental effort, or attention, to any given task and often attempts to perform smaller tasks in parallel (Wickens C. D., 1984; 2002). *Time-sharing*, commonly known as multitasking, is the ability to perform multiple tasks in parallel. The proverbial "walking while chewing gum" illustrates multitasking of two largely physical tasks that demand little mental workload. This example might be considered an example of efficient time sharing because both tasks can be performed in parallel just as well as in isolation (Wickens C. D., 1984).

Conversely, two higher workload tasks, such as patting one's head and rubbing the stomach simultaneously, may demand too many mental resources to be performed concurrently and the tasks are disrupted. Because each of these examples involves tasks that occupy similar mental "channels," they share the same resources and in the second example, a "bottleneck" occurs. Both rubbing one's head and patting one's stomach involve conscious cognitive effort to dictate motor functions, whereas one may argue that walking is an almost subconscious activity.

Attention is one key component of available mental capacity. Logically, an operator cannot perform any mental work towards a task if he cannot pay any attention to it. Since humans have finite attentional resources, and finite capacities for work, they prioritize tasks and may elect to devote fewer resources to obtain acceptable performance. Because attention is active, it requires effort and therefore induces work (Kahneman, 1973). This finite limitation of attention leads to a bottleneck where the operator cannot process all of the information available (Kahneman, 1973). Just like a human has focal and peripheral vision, a similar analogy can be drawn when the same human filters attentional demands, such as listening to a conversation with a television in the background. This person can choose to listen to one intently, while still hearing the other in the background. Depending on the degree of divided attention, this listener can notice any number of attributes or cues from the background conversation but will have difficulty discarding certain irrelevant cues (e.g. it's nearly impossible to observe the shape of an object without noticing its color) (Kahneman, 1973).

In capacity theory, the operator has a finite capacity or "pool" of given resources to allocate to primary and secondary tasks (Wickens C. D., 1984; Knowles, 1963;

Kahneman, 1973). Unitary or single-resource theory assumes that only one pool of resources exist, which is available to all mental processes equally (Wickens C. D., 1984). The workload imposed by the primary task could be measured as the inverse relationship of secondary task performance, thus showing an attention or resource bottleneck (Knowles, 1963). However, attention connotes awareness, which is not related to specific task performance (Wickens C. D., 2002). If the secondary task imposes relatively low demand, then impact on primary task performance may not be measurable. Thus, as multiple tasks are being performed concurrently, the operator's performance is dictated by the amount of resources demanded beyond the data-limited regime of the performance-resource function (Wickens C. D., 1984). However there are certain limitations towards time-sharing of even simple tasks: one cannot look in two places in separate fields of view at once, and the act of time-sharing itself can pull away mental resources, such as texting and driving (Wickens C. D., 1984; 2002). However, this constraint does not exist (to the same extent) if listening to the radio and driving,

Single-resource theory breaks down when trying to explain difficulty insensitivity: that is, the performance of a difficult primary task is not adversely affected by the secondary task. If one or both tasks have sufficient data-limited regions on the performance-resource function, then single resource theory could explain this insensitivity (Wickens C. D., 1984). But if both tasks are thought to be more resource limited, and are performed perfectly in parallel, it may be because there is no structural interference between the two tasks. Multiple-resource theory maintains that there are multiple separate resource pools that can be allocated as necessary (Wickens C. D., 2002). Perfect multitasking occurs when two tasks do not use overlapping resources.

Similarly, two difficult tasks can impose heavy workload without a degradation of performance, provided that separate resource pools are required (Wickens C. D., 1984). However, a resource demanding task combined with memory-demanding cognitive process can create performance degrading interference (Wickens C. D., 2002).

This multiple-resource theory posits that multiple dimensions exist to define a capacity reservoir: stages of processing, perceptual codes, modalities of input, and modalities of response (Wickens C. D., 1984). Processing stages compares a central processing function versus cognitive response. Perception exists in both verbal and spatial domains; input modalities can be either visual or auditory, and response modalities can be manual or vocal (Wickens C. D., 1984). Parallel processes are still possible within the same channels that still use separate, non-interfering resources. An example of this is using focal and ambient (or peripheral) vision to accomplish two separate tasks (Wickens C. D., 2002). Thus a task may demand resources in varying degrees from different (and multiple) reservoirs. Human performance can still be explained by applying the performance-resource function to the capacity in each reservoir. Considerable research has been conducted regarding the complex interaction of each dimension and channel on the effects of operator performance and task efficiency (Wickens C. D., 2002; Vidulich, 1988; Martin G. , 1989; Martin, Wogalter, & Forland, 1988; Sarno & Wickens, 1995; Goodman, Tuerina, Bents, & Wherewille, 1999; Polson & A, 1988; Paivio, 1971; McLeod, 1977)(Wickens C. D., 1980; Tsang & Wickens, 1988; Wickens & Liu, 1988).

In a system-of-systems analysis of multiple remotely piloted aircraft control, multiple simultaneous primary responsibilities (i.e. piloting demands) drove a naturally



higher workload, but secondary tasks (namely, radio communication) drove “extreme spikes” in mental workload. When the primary task is unexpected and urgent, such as an emergency or dynamic, unplanned situation, the workload (with associated attention resources) becomes so high that secondary tasks are neglected (Colombi, Miller, Schneider, McGrogan, Long, & Plaga, 2011).

From an engineering standpoint, multiple-resource theory describes operator performance, which tasks can be performed in parallel, the amount of interference between multiple tasks, and how increasing difficulty in one task affects the performance of other tasks (Wickens C. D., 2002; Little, et al., 1993). Thus, in time-constrained, task-intensive environments, such as the one faced by any aircrew, multiple-resource theory can predict the effects of different modalities (i.e. effects of receiving information via voice or auditory means), or even the value added of multitasking or sequencing when evaluating procedures.

### ***Expertise***

An expert might experience lower workload than a novice for the same given task because the expert perceives how that task interacts with other tasks (Secarea, 1990; Hart & Sheridan, 1984). For instance, the expert is expected to have a better grasp of how an individual task fits into the bigger picture (National Research Council, 1982). However, the experts’ advantage of pattern recognition decreases as the value of information becomes less meaningful. One would expect an expert to develop efficient workload strategies and more ‘automatic’ motor responses by virtue of his/her experience. However, the introduction of a surprise or novel situation or dilemma requires a surge of attention and greater mental processing resources (Kahneman, 1973). Failures,

abnormalities, and surprises will affect the expert differently than the novice, and mistakes made by the expert operator are likely to be recognized and corrected in a timely manner with an associated lower level of workload (Hart & Sheridan, 1984).

### ***Workload Strategies***

Pilots frequently find themselves responding to multiple, simultaneous demands with frequent and unpredictable interruptions, which forces them to adapt various strategies to keep workload at a manageable level. They respond to some (multitasking where appropriate), defer and delay others and interleave the rest (Loukopoulos, Dismukes, & Barshi, 2009). Before reaching overload operators can simply increase the level of effort to meet increased workload with consistent performance (Hart & Sheridan, 1984). The operator could choose to reduce the required level of performance or shed certain tasks in order to keep the workload level manageable (Hart & Sheridan, 1984). Pilots have been shown to trade speed for accuracy where required performance allowed, rather than optimize performance, which also reduces the utility of expertise (Higgins & Chignell, 1988; Secarea, 1990).

One of the most common forms of workload management strategies the operators believe they use to cope with high-workload situations is *multitasking*. However, true multi-tasking (i.e. perfect time-sharing) as described in multiple-resource theory is often confused for other workload strategies (Wickens C. D., 2002). *Interleaving* is the process of temporarily interrupting Task A to perform part of Task B then returning to Task A and repeating the process (Alion Science, 2013). Some tasks may intentionally be omitted, called *task shedding*. *Delegating* is task shedding from one operator and assigning the task to a different operator (Brockman, 2010). *Adaptive attack* is similar to

interleaving, but instead of Tasks A and B performing concurrently, the operator prioritizes one task and defers the other until resources are available. Both task shedding and adaptive attack are common strategies for unplanned, dynamic events that are high priority. On the other hand, interleaving may be used when checklists or procedures are run concurrently, or when giving a brief while executing a checklist (Loukopoulos, Dismukes, & Barshi, 2009; Adams & Pew, 1990).

Workload strategies are not without their risks and aviation safety literature abounds with accident reports and anecdotes of mistakes caused by missed procedures and improperly managed workload. NASA reported more than 50 incidents of attempted no-flap takeoffs in the decade preceding 2009--an error that has resulted in numerous fatal accidents and is often caused by omitting checklist steps in the often distracting and hectic before-takeoff phase of flight (Loukopoulos, Dismukes, & Barshi, 2009; NASA, 2014; Adams & Pew, 1990). While workload may be neatly ordered when designing a procedure, random real-world noise, such as radio traffic or the requirement to navigate a complex set of taxi instructions often interrupts this flow (Loukopoulos, Dismukes, & Barshi, 2009). Distractions and demands simply do not allow for the neat and orderly flow of tasks to the operator (Adams & Pew, 1990). This forces some type of workload strategy and can potentially compromise operator performance. As a result of compromised performance, task simplification is recommended to reduce workload and increase performance (Secarea, 1990).

Pilots typically believe that they are good at multi-tasking, yet oftentimes this fact is hidden in that most tasks performed in parallel are highly rehearsed, thus performed almost automatically. The unpredictability forces pilots to interleave tasks in an ad hoc

and creative manner (Loukopoulos, Dismukes, & Barshi, 2009). Although the vast majority of these impromptu workload strategies result in acceptable task completion, the randomness of the interruption and ad hoc response strategy can lead to serious omissions and deviations from procedures, especially when habit patterns are broken (Loukopoulos, Dismukes, & Barshi, 2009). Hence, checklists (particularly challenge and response), automated monitoring systems (such as gear and flap warning horns) and informal processes serve to catch these inadvertent omissions.

### ***Workload Measurement***

While physical workload can be judged by evaluating physical movements, mental workload, in particular, is difficult to measure. It is difficult to define workload during monitoring tasks unless there is any overt response (Hart & Sheridan, 1984). In aviation, particularly tactical and combat missions, significant effort is devoted to sensory intake and processing (McCracken & Aldrich, 1984). This difficulty compounds when operators are transitioning from mundane monitoring to a complex and urgent emergency situation management (Hart & Sheridan, 1984). Monitoring an automated system in which the operator has a high level of trust may have a low perceived workload and not as easy to observe, whereas a system that the operator does not trust will result in a very conscious, therefore reportable, level of mental workload. Indeed, an operator is more inclined to use automation when trust is high, and leave even that system engaged if it malfunctions. Thus, the operator may be forced to trust automation as a workload management strategy when under stress or to free up resources for complex problem solving tasks (Parasuraman & Riley, 1997; Parasuraman, Sheridan, & Wickens, 2000). Conversely, an operator who has low trust in automation will be less likely to use it and

quicker to disconnect it when something abnormal happens (Parasuraman, Sheridan, & Wickens, 2000).

Operators will sometimes seek to fill unused capacity. While a task may not require overt mental work, the human operator may find mental activities to occupy him/her. These activities may be indirectly related to the task at hand (i.e. planning), developing situation awareness, or may be daydreams or musings (Hart & Sheridan, 1984). Mental processing workload related to situation awareness is non-trivial, yet not explicitly linked to any given task. This level of distraction cannot be objectively measured and is far too complex to be predicted, yet it occupies part of the operator's finite mental capacity (Hart & Sheridan, 1984).

Workload can be measured empirically or analytically through both subjective and objective means (Rusnock, Borghetti, & McQuaid, 2015). Empirically, workload is adjudicated with subjective evaluations, surveys, and/or measuring some kind of physiological response (i.e. heart rate, eye movement, electrical brain activity, etc). Analytical and deterministic methods can begin with the design phase and calculate expected workload values from a task network analysis. Analytical workload measurement techniques are predictive in nature, therefore offer a better evaluation of workload for systems still in the conceptual stage (Mitchell, 2000). Analytical methods aim to calculate the cumulative workload imposed by a series of tasks. These are frequently performed as computer simulations, such as VACP, or direct performance measurements (either physiological or some physical parameter). However, if there is no established benchmark of tasks in a controlled environment, then there can be no objective measure of workload to compare against (Hart & Sheridan, 1984). Most

common forms of measuring workload are subjective evaluations performed by the operator after an experiment is run, usually in the form of a survey or questionnaire. Subjective workload assessments may easily capture the essence of mental workload, especially when the effects of many different contributing factors may be poorly understood (Hart & Staveland, 1988). While subjective assessments lend themselves easily to both researchers and subjects alike, they are not without problems. Subjective methods rely heavily on judgment, which is influenced by heuristics and biases. If a task was performed multiple times during the experiment, the subject may only be able accurately recall the most challenging or latest iteration of that task. Information fidelity erodes as time elapses such that tasks performed early in the experiment or a questionnaire conducted well after the task occurred rely more on the recall ability of the test subject (Hart & Staveland, 1988).

Biases aside, subjective methods must establish a degree of consistency in workload ratings. Thus, they typically involve relative, linguistic measures such as “low” and “high” and avoid quantifying workload values. Since task variables covary with the test subjects involved, subjective workload assessments can produce different values of experienced workload (Hauser, Childress, & Hart, 1982; Hart & Staveland, 1988). For a given task, variance is also expected as a result of different task weights reflected from the evaluator’s biases (Hart & Sheridan, 1984). Questionnaire results may only reveal overt responses and conscious mental effort while masking subconscious and background processes (Hart & Sheridan, 1984). Most issues with consistencies and biases can be mitigated with a large sample size of test subjects. The three most common methods of

subjective workload ratings are: the Subjective Workload Analysis Tool (SWAT), the Cooper-Harper Index, and NASA's Task Load Index (TLX).

#### Subjective Workload Analysis Tool (SWAT)


Subjective Workload Assessment Technique (SWAT) measures mental workload only and assumes that the experimenter will use another technique to measure physical workload for any significant tasks, if applicable. (Reid, Potter, & Bressler, 1989) Either during or immediately after an experiment is run (or both) the operator rates mental workload on the pre-briefed set of scales (Reid, Potter, & Bressler, 1989). Based on the operator rating of workload, the investigator weighs each component (time load, mental effort, psychological stress) and computes a final SWAT value based on the scale algorithm. The speed or accuracy of task completion theoretically indicates workload. However, this empirical method may not account for workload management strategies, information quality, or the relationships between primary and secondary tasks (Mitchell, 2000). Thus, an operator evaluation of perceived workload does not reliably predict performance (Tsang & V, 1996).

#### Cooper-Harper scale

The standard scale for evaluating aircraft handling qualities has been the Cooper-Harper scale. This scale originally seeks to standardize aircraft flyability by defining "handling qualities" as more than simple aerodynamic stability and control by considering cockpit design (visibility, displays, and control), task performance, and implicit factors, such as stress and environment (Cooper & Harper, 1969). By incorporating miscellaneous cockpit tasks with basic aircraft control qualities, this scale correlates perceived workload with performance from the pilot's point of view. A

qualitative scale such as this may be desirable when applying real-world stress and environmental pressures, auxiliary tasks, etc., cannot neatly be measured experimentally. Cooper and Harper concluded at the time that it was impossible to measure all aspects of pilot performance and that there needed to be operator feedback to illustrate those areas that could not be measured explicitly, thus a pilot-rating scale was the only method to show workload at the man-machine interface (Cooper & Harper, 1969). The revised Cooper-Harper scale is a numerical rating scale designed to be used in conjunction with a written evaluation to identify and amplify design shortcomings. Figure 3 shows the original Cooper-Harper rating scale. The scale asks the pilot to make up to three decisions regarding performance that Pilot performance (or compensation) describes a level of physical workload. The Bedford scale is another aircraft handling/workload scale similar to the Cooper-Harper.



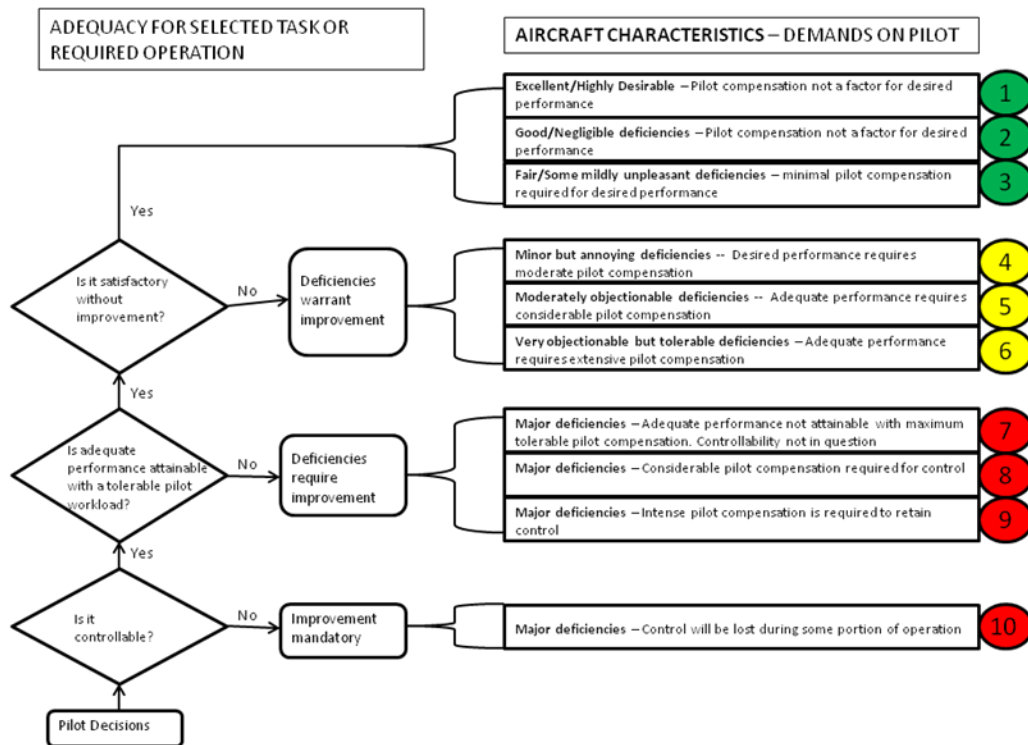

**Figure 3: Handling Qualities Rating Scale(Cooper & Harper, 1969)**

### NASA Task Load Index (NASA-TLX)

The NASA-developed Task Load Index (TLX) is a popular subjective workload evaluation technique. NASA-TLX computes an overall workload score based on weighted averages of six scales: mental demand, physical demand, temporal demand, performance, effort, and frustration (NASA, 2015). TLX theory assumes that task demands (mental, physical, and temporal) are multi-dimensional, may covary, and contain some objective measure of magnitude (i.e. difficulty) and importance (Hart & Staveland, 1988). These demands are perceived by the operator, who also applies psychological variables to yield emotional, cognitive, and physical responses which then can be evaluated (Hart & Staveland, 1988). The amount of covariance is situation

dependent, and TLX seeks to identify task demands and the non-task factors and stressors that are implicit to the situation.

In practice, after an experiment is run, each operator/test subject is asked a question relevant to each task according to the subscale. The operator responds by marking appropriately along each scale, which appear arbitrary and linguistically descriptive. The experimenter applies a numerical value based on the operator's rating, which is added together to generate a weighted workload score and thus an overall workload rating for that task (Hart & Staveland, 1988).

### Physiological Methods

To maintain performance as workload increases, the operator must increase effort. The human body has a measurable physiological reaction to workload and stress. Several methods of measuring physiological reactions are:

- Heart rate activity such as heart rate variability from Electrocardiograms (ECG or EKG) (Jorna, 1991; Watson, 2001; Wilson, 1991; 2001; Siegel & Keller, 1992)
- Respiration rate (Wilson, 1991)
- Eye movement (Siegel & Keller, 1992; Wilson, 1991; 2001; Schnell, Macuda, Poolman, & Keller, 2006)
- Brain activity, such as those measured from Electroencephalograph (EEG), Event-related potential (ERP), and Positron emissions tomography (PET) (Wilson, 1991; 2001; Schnell, Macuda, Poolman, & Keller, 2006)

While physiological measurements can be useful for determining areas of high workload, they are empirical in nature, therefore they cannot serve as useful predictors to engineers before a prototype is constructed (Mitchell, 2000). Also, if an operator employs effective workload strategies in an effort to balance or level experienced

workload, then high workload peaks may not manifest themselves significantly in a physiologically measurable way (Kramer A. F., 1991). Their physiological effects may lag behind the actual task, thus making it difficult to correlate imposed workload for any specific task or time. However, when combined with questionnaires and known baselines, physiological measurements can be used to correlate subjective workload methods (Svensson, Angelborg-Thanderz, & Wilson, 1999).

#### Pilot Performance Measurements

Pilot performance can be measured objectively by recording deviations from any number of in-flight parameters. Aircrews are trained to recognize decreased performance shown in late verbal responses, erratic or illogical control movements, delayed or ignored cues and prompts (McDaniel, 1996). The degree to which a pilot exceeds a given flight parameter (i.e. glideslope, altitude, heading, etc.) can demonstrate how performance suffers from high workload (McDaniel, 1996). However, by its nature, this method solely measures performance, which as described earlier, may only correlate to periods of excessively high workload or low operator motivation. It is best to use performance measurements in conjunction with other workload assessment techniques.

#### Visual, Auditory, Cognitive, Psychomotor (VACP) Analysis

A VACP analysis can account for the multiple-resource theory concept of channels or components of workload. These channels--visual, auditory, cognitive and psychomotor--were scaled and quantified first by McCracken and Aldrich (1984) to predicatively quantify task workload for a proposed light scout/attack helicopter (Table 3). Each channel was divided into an ordinal scale and assigned various descriptors

according to increasing level of task demand. Complex tasks involving multiple channels simply add the individual channel values together for a total workload.

**Table 3: VACP(McCracken & Aldrich, 1984)**

| Scale Values              | Descriptors                                                 |
|---------------------------|-------------------------------------------------------------|
| <b><u>Visual</u></b>      |                                                             |
| 0.0                       | No activity                                                 |
| 1.0                       | Monitor, scan, survey                                       |
| 2.0                       | Detect movement, change in size/brightness                  |
| 3.0                       | Trace, follow, track                                        |
| 4.0                       | Align, aim, orient on                                       |
| 5.0                       | Discriminate symbols, numbers, words                        |
| 6.0                       | Discriminate based on multiple aspects                      |
| 7.0                       | Read, decipher text, decode                                 |
| <b><u>Auditory</u></b>    |                                                             |
| 0.0                       | No activity                                                 |
| 1.0                       | Detect occurrence of sound, tone, etc.                      |
| 2.0                       | Detect change in amplitude, pulse rate, pitch               |
| 3.0                       | Comprehend semantic content of message                      |
| 4.0                       | Discriminate sounds on the basis of signal pattern          |
| <b><u>Cognitive</u></b>   |                                                             |
| 0.0                       | No activity                                                 |
| 1.0                       | Automatic (stimulus-response)                               |
| 2.0                       | Sign/signal recognition                                     |
| 3.0                       | Alternative selection                                       |
| 4.0                       | Encoding/decoding, recall                                   |
| 5.0                       | Formulation of plans (projecting action sequence, etc)      |
| 6.0                       | Evaluation (considering several aspects)                    |
| 7.0                       | Estimation, calculation, conversion                         |
| <b><u>Psychomotor</u></b> |                                                             |
| 0.0                       | No activity                                                 |
| 1.0                       | Discrete actuation (button, toggle, trigger)                |
| 2.0                       | Discrete adjustive (variable dial, etc)                     |
| 3.0                       | Speech using prescribed format                              |
| 4.0                       | Continuous adjustive (fight controls, sensor controls, etc) |
| 5.0                       | Manipulative (handling objects, maps, etc)                  |
| 6.0                       | Symbolic production (writing)                               |
| 7.0                       | Serial discrete manipulation (keyboard entries)             |

This initial VACP model was modified by Bierbaum, et al (1989) to adjust scale the ordinal scale into a ratio scale. The modified VACP scale (Table 4) offers more refined,

and in some cases, reordered workload values and descriptors and includes employment of night vision goggles (NVGs)(Bierbaum, Szabo, & Aldrich, 1989).

**Table 4: Modified VACP Scale(Bierbaum, Szabo, & Aldrich, 1989)**

| Scale Values              | Descriptors                                                       |
|---------------------------|-------------------------------------------------------------------|
| <b><u>Visual</u></b>      |                                                                   |
| 0.0                       | No activity                                                       |
| 1.0                       | Visually Register/Detect occurrence of image                      |
| 3.7                       | Discriminate symbols, numbers, words                              |
| 4.0                       | Visually inspect/check (discrete inspection/static condition)     |
| 5.0                       | Visually locate/align (selective orientation)                     |
| 5.4                       | Visually track/follow                                             |
| 5.9                       | Read (symbol)                                                     |
| 7.0                       | Visually scan/search/monitor (continuous/serial inspection)       |
| <b><u>Auditory</u></b>    |                                                                   |
| 0.0                       | No activity                                                       |
| 1.0                       | Detect occurrence of sound                                        |
| 2.0                       | Orient to sound (general orientation/attention)                   |
| 4.2                       | Orient to sound (selective orientation/attention)                 |
| 4.3                       | Verify auditory feedback (detect occurrence of anticipated sound) |
| 4.9                       | Comprehend semantic content of message                            |
| 6.6                       | Detect change in amplitude, pulse rate, pitch                     |
| 7.0                       | Discriminate sounds on the basis of signal pattern                |
| <b><u>Cognitive</u></b>   |                                                                   |
| 0.0                       | No activity                                                       |
| 1.0                       | Automatic (simple association)                                    |
| 1.2                       | Alternative selection                                             |
| 3.7                       | Sign/signal recognition                                           |
| 4.6                       | Evaluation (consider single aspect)                               |
| 5.3                       | Encoding/decoding, recall                                         |
| 6.8                       | Evaluation (considering several aspects)                          |
| 7.0                       | Estimation, calculation, conversion                               |
| <b><u>Psychomotor</u></b> |                                                                   |
| 0.0                       | No activity                                                       |
| 1.0                       | Speech using prescribed format                                    |
| 2.2                       | Discrete actuation (button, toggle, trigger)                      |
| 2.6                       | Continuous adjustive (fight controls, sensor controls, etc)       |
| 4.6                       | Manipulative (handling objects, maps, etc)                        |
| 5.8                       | Discrete adjustive (variable dial, etc)                           |
| 6.5                       | Symbolic production (writing)                                     |
| 7.0                       | Serial discrete manipulation (keyboard entries)                   |

A predictive workload analysis evaluates a function of tasks up to an entire mission by constructing a task analysis, then applying time values to task duration and

sequencing to develop a task flow. Then VACP workload values are added to each task. The resultant workload analysis documents total composite workload over time.

### **Situation Awareness**

The ability to conceive of the aircraft's whereabouts, status, weather, fuel state, terrain, and, in combat, enemy disposition is critical to effective aircraft operation. In critical phases of flight, poor weather, or in the face of systems malfunctions or can mean the difference between mission success and failure or even survivability. Operator performance in complex or dynamic environments is often a function of situation awareness (SA) (Secarea, 1990). Aircrews spend considerable portions of time and effort developing and maintaining SA, especially in evolving environments (Endsley M. R., 1999). Indeed the military has had a keen interest in SA in the cockpit dating back to World War I and especially more so in the information age of the late 20<sup>th</sup> century (Endsley M. R., 1995a; Press, 1986; 57th Figther Wing, 1986). In tactical situations, this includes knowledge about the locations, actions, and capabilities of both friendly and enemy forces (Endsley M. R., 1988a; 1999). SA is considered so important that it is considered a 'critical' grading area for flight evaluations (check rides) for Air Force C-130 crews (AFI 11-2C-130, Vol. 2, 2014). A demonstrated failure to maintain SA would result in a failure of the check ride and loss of aircrew qualification (AFI 11-2C-130, Vol. 2, 2014). A leading cause of military and 88% of commercial aviation accidents have been attributed to poor SA (Endsley M. R., 1994; Hartel, Smith, & Prince, 1991).

Situation awareness is the knowledge of environmental factors that influence decisions and depends on the operator's internal perceptual model of the world (Klein,


Calderwood, & Clinton-Cirocco, 1986). SA is the operator's perception (or mental model) of elements in the environment around him within a volume of space and time, the comprehension of their meaning, and the projection of their status into the future (Endsley M. R., 1988a; 1999). Situation awareness drives decision making based on the operator's mental model of the environment. Situation awareness, while independent from decision making, forms a basis for it (Endsley M. R., 1995a; 1995b). The performance of a combat pilot is highly related to the fusion of decision-making and SA (Venturino, Hamilton, & Dverchak, 1989). SA takes inputs primarily from the operating environment (the situation itself), while secondary inputs such as motivations, operator capacity, and workload adjust the SA mental model. In turn, the operator makes a decision based off his SA and similarly colored by those secondary inputs. The resulting decision leads to an action, which alters the environment/situation and the cycle begins again.

As one would expect, pilot and aircrew SA is highly related to the dimensions of space and time (Endsley M. R., 1988a; 1995a). Aviation is inherently and naturally spatial in nature. Navigational position, altitude, speed, and heading naturally come to mind, and is frequently invoked in the aviator's priorities to 'aviate, navigate, and communicate' in that order. That is, fly the airplane first (altitude, attitude and airspeed), then navigate it, and then worry about other tasks, such as radio traffic. But, as SA is built up over time, it considers events that happened in the past to influence the mental model of the present and project a future status. Even non-visual observations such as written procedures, listening to radio traffic, etc., correspond to some mental model of space and time. However, the operator must maintain analytical awareness in order to

project his mental model forward (Endsley M. R., 1988a). SA regarding system status, malfunctions are highly analytical, and even observations in the space-time realm involve some degree of analysis.

### ***Levels of Situation Awareness***

Situation awareness (SA) is more than the possession of many pieces of data: it must be processed into some coherent understanding that is valid both in the present and in future tense (Endsley M. R., 1995a). Thus, multiple levels of SA exist as shown in Figure 4: Level 1 or perception, Level 2 or comprehension, and Level 3 or projection. The first and most basic level is detection or perception of conditions in the environment along with basic characteristics of that observation (Endsley M. R., 1988a; 1995a). This could be observing an instrument reading, noticing a warning light, terrain or other aircraft, or hearing a radio call.

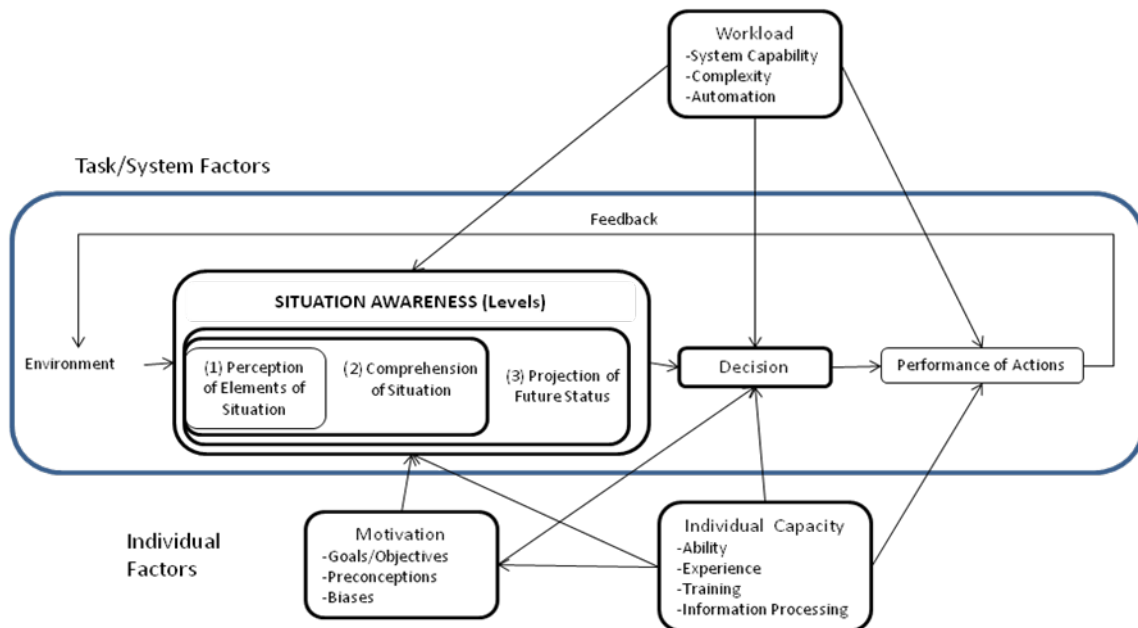

**Figure 4: Situation Awareness/Decision Making Model (Endsley M. R., 1988a; 1995a)**



The second level of SA involves comprehension of the meaning of those observations (Endsley M. R., 1988a; 1995a). For example, the warning light indicates that a system has failed, the fuel gauge indicates available range and time, the instrument reading describes aircraft performance, and the radio call relays an air traffic control (ATC) clearance. Because levels of SA build upon each other, poor perceptual SA makes comprehension much more difficult. Aircrews face incomplete information, conflicting data, and data incongruent with the established mental model, the resolution of which takes a great deal of effort (Adams & Pew, 1990). Spatial disorientation exemplifies a potentially hazardous condition in which the pilot's mental model is incongruent with the real world and conflicts with the information displayed by his instruments resulting in confusion about the actual aircraft attitude.

The third and highest level of SA projects this comprehension towards some future status (Endsley M. R., 1988a; 1995a). Is aircraft performance deviating from required parameters? Will that system failure prevent mission accomplishment? Based on the ATC clearance, what kind of future delays, constraints, and conflicts could arise? This highest cognitive level of SA joins cognition with decision making and action.

Low SA can be attributed to certain failures unique to each level. Failure to correctly perceive information (Level 1) may be caused by unavailable data, data that is hard to detect, a failure to observe available data, misreading data, or memory loss. A failure to comprehend information (Level 2) can be caused by a poor mental model, incorrect use of a mental model, or over-reliance on incorrect variables. Failure to project a future status (Level 3) stems from poor comprehension or an inaccurate

projection of existing trends since people are generally poor at prediction (Endsley M. R., 1999).

### *Attention, Capacity, and Situation Awareness*

Available SA, just like mental workload capacity, is a product of the pilot's previous training and experiences, but is susceptible to preconceptions, biases, and objectives and individuals possess different abilities or capacities to obtain and maintain SA (Endsley M. R., 1988a; 1995a). Non-routine and unpredictable situations, such as combat, demand effective integration of large quantities of information on a limited cognitive capacity to process (Secarea, 1990; Endsley M. R., 1995a). Cognitive theory applies to SA capacity in much the same manner that it applies to mental workload capacity. While each operator may have different innate abilities to make observations, such as good eyesight or good spatial processing abilities, several factors can affect how readily a given operator acquires SA.

It would be reasonable to assume a pilot has observed a warning light simply because it is in his field of view. However, even cues in the normal field of view can be missed if they are too subtle or if the operator is not paying sufficient attention to it (Kahneman, 1973). If a pilot notices the light from another aircraft at night, but the aircraft's relative position appears to be fixed in the windscreen, then the pilot might assume that light might be a star or a street light. But, if that light appears to move across the screen, the pilot's attention would naturally be drawn to it, and thus determined to be another aircraft. Similarly, a system status change may go unnoticed if the indication is subtle (i.e. a gauge moving slightly, dim light, etc.), yet most pilots would immediately

recognize a flashing “Master Warning” light located prominently in the middle of the normal field of view—especially if it was accompanied by an audible warning tone.

Even perfect cueing will not add to SA if attention is not devoted to it.

Information overload can overwork the operator but also overwhelm the senses or dull them to similar stimuli. An operator listening to multiple radios simultaneously with frequent intra-cockpit communications cannot process all the information being forced onto one (auditory) cognitive channel. Thus, the operator must prioritize the demands for single mental resource (Endsley M. R., 1995a). Conversely, the operator can become desensitized to frequent, or nuisance warnings, thus negating the effectiveness of those warnings (Billings, 1991; Wiener & Curry, 1980).

For competing attention demands an operator employs strategies to prevent information overload. Indeed a human operator’s capacity for attention is somewhere between 2-40 bits per second--far lower than the ability of the environment and modern cockpit systems to present them (Lovesey, 1995). Attention (and therefore SA) priorities depend of the determined relevance, implications, and urgency of the received data (Adams & Pew, 1990). The pilot might not pay much attention to an element until its status changes (i.e. noticing an unusual sound or handling characteristic). Instead of attempting to continuously monitor the status of all indicators, gauges, and displays equally, an operator chooses to sample instrumentation on a priority basis. The pilot’s instrument “cross-check” prioritizes aircraft attitude, then other measures of performance (i.e. heading, altitude, etc), then other mission systems (AFMAN 11-217, Vol 1, 2010). The pilot therefore samples higher priority instruments more frequently than lower priority instruments. Thus, limited pilot attention is devoted to elements in the

environment based on how they contribute to overall success based on the pilot's goals (Fracker M. L., 1989). Because of the prioritization of attention, the operator is much more likely to perceive changes to things he is actively observing or engaged in (Adams & Pew, 1990).

Attention can be split between environmental elements that demand different cognitive channels as stated in Wickens' Multiple Resource Theory (2002). The performance-arousal function also applies to attention and level 1 SA in much the same manner as it does in Figure 1. A sufficiently bored operator may simply not be paying attention, trusting that the situation will continue to proceed normally. Yet further arousal can stimulate an individual to commit more resources to attention and actively acquire SA (Kahneman, 1973). No current criteria exist to determine the required level of SA needed to obtain a desired level of performance (Pew, 1991). Thus, less than perfect SA causes the operator to assume a level of risk for error. Good SA increases the probability of good performance, but does not guarantee high performance because other factors are also at play (Endsley M. R., 1995b).

The act of perceiving an environment, comprehending it's meaning, and projecting it forward into a hypothetical, yet actionable future state imposes a heavy load on the operator's working memory (Wickens C. D., 1984; Endsley M. R., 1995a). This is especially true when the operator is rapidly introduced into a novel environment. This reliance on working memory creates a crucial attention bottleneck, which is inextricably tied to SA (Fracker M. L., 1989). Thus the act of attaining SA induces workload (Adams & Pew, 1990; Colombi, Miller, Schneider, McGrogan, Long, & Plaga, 2011; Endsley M. R., 1993). While the process of SA requires effort, and therefore work, it is not overt in

the manner that task-imposed workload is observable. The operator must use untasked spare time to acquire SA and perform relevant planning, yet this time may not be observable, let alone predictable (Colombi, Miller, Schneider, McGrogan, Long, & Plaga, 2011).

To mitigate demands on working memory, training, expertise, briefings are used to push those demands into the realm of long-term memory for storage and easier access. Continued exposure to the environment through training, experience, or mission repetition makes the environment routine, reducing the cognitive burden for acquiring SA. However, since long-term memory is not available when an individual is confronted with a novel situation, the burden of processing must shift back to working memory, which consumes more attention resources (Endsley M. R., 1995a; Adams & Pew, 1990). Other situations where SA is very low or erroneous, requires significant, if not enormous effort (i.e. workload) to correct, However even with a great expenditure of effort, an increase of SA is not guaranteed (Endsley M. R., 1993). An expert would have a higher likelihood of observing a similar situation, thus driving down the number of occurrences of novel situations with its attendant workload burden. In another setting, the pre-mission briefing sets expectations as to what will happen as well as contingencies that could arise. Thus, when an environmental cue appears, the pilot recognizes it faster if it was briefed than an unexpected cue. However, due to confirmation bias, if an element contradicts or otherwise disagrees with the preconceived expectation, then there is a higher likelihood of delay in perception or comprehension errors (Jones, 1977). Decision bias based on prior experience is an issue to SA when expectations cause the operator to ignore or misinterpret data to form an inaccurate mental model (Einhorn & Hogwarth, 1981).

Both long- and short-term memory play a role in how an operator builds SA (Endsley M. R., 1995a; Adams & Pew, 1990). The more developed memory stores a larger database of patterns from which to compare environmental cues. Better pattern recognition allows for faster recognition and perception of an element, or a richer comprehension of that element and what it could mean to the operator's future (Endsley M. R., 1995a). Pattern development can lead to automatic processing which can occur with conscious attention and a minimum of resources (Logan, 1988; Adams & Pew, 1990). Even basic decisions can be so habitual and automatic that the operator may not even recall the decision itself. Patterns and environmental cues can become so automatic that the operator may develop perceptual SA without knowing how he obtained that knowledge (Endsley M. R., 1995a).

Even when specific elements of SA are unknown, a pilot can still make decisions and predictions based off of very general knowledge and refine his mental model as more information becomes available and SA increases (Endsley M. R., 1995a). The confidence level of the information is an important aspect of SA because it determines how much more information is required to make a decision and influences the outcome of that decision (Endsley M. R., 1995a; Norman D. A., 1989). For instance, a pilot may only have knowledge of generalized enemy weapons systems capabilities and doctrine. His pattern of observation might be oriented towards finding the specific location of threats, which was refined because he has a better idea where to look (or even where not to look). When something suspicious—a radar return, an aircraft silhouette, or movement on the ground—is observed, the range of possibilities is constrained by general knowledge allowing for faster processing of that observation.

Just like workload capacity theory, expertise, training, and stress affect decision quality and SA. When presented with meaningful information, experts perform better, have better SA, and make better decisions (Adams & Pew, 1990; Endsley M. R., 1995a). Training and experience provide experts with a wider array of historical patterns that may closely match the current situation, more mature decision strategies, and require less effort to arrive at a given decision compared to the novice (Endsley M. R., 1995a). However, when information is meaningless or lacking altogether, or the situation is novel, the advantages of expertise are negated and expert versus novice performance approaches parity (Secarea, 1990; Hart, 1986; Kramer A. F., 1986; Lanzetta, Warm, Dember, & Berch, 1985; Ortega, 1989; Endsley M. R., 1995a). Stress and distractions can adversely affect decision quality (Wickens, Stokes, Barnett, & Hyman, 1988). Thus, external factors can simultaneously affect workload, SA, and decision making similarly.

### ***Workload and Situation Awareness***

Experienced workload impacts the amount of SA available to the pilot at any given time (Endsley M. R., 1993). It is reasonable to conclude that a pilot in an overloaded condition devotes a great deal of mental effort towards task management at the expense of observing and perceiving the environment around him. Workload impacts not only SA but the ability to make decisions and perform follow-on actions (Endsley M. R., 1988a). Because acquiring SA requires work, SA is both the result and generator of work (Endsley M. R., 1993). However, just as in workload-performance and attention theory, this is not to say that high workload necessarily results in low SA. While overload will result in poor performance, low SA may not necessarily result in poor

performance if the element of lost SA is not relevant to the task at hand (Endsley M. R., 1993).

If workload and SA are to be measured together, Endsley (1993) suggests that using complimentary methods may not be enough, and that the linkage between workload and SA are quite complex. Workload only measures how hard a person is working, not to what ends, or benefits, that work accomplishes (Endsley, Selcon, Hardiman, & Croft, 1998). For example the Subjective Workload Assessment Tool (SWAT) and subjective SA tools used together can suggest that an operator expends more effort to maintain a constant level of SA when task difficulty increases (Endsley M. R., 1993; Fracker & Davis, 1990). Workload may only impact SA as it approaches overload (Endsley M. R., 1996). However, while workload and SA are independent constructs, they show positive correlation, as measured in a study with NASA-TLX and the Situation Awareness Rating Technique (SART) (Endsley M. R., 1988c; 1993; Selcon, Taylor, & Koritsas, 1991). This correlation is not precise, nor is it consistent, partially due to the covariance of human performance against workload and SA. Endsley (1993) found significant dissociation between SWAT and the Situation Awareness Global Assessment Technique (SAGAT, described in the section: Measuring Situation Awareness) similar to dissociation found by Fracker & Davis (1990). During simulated air combat scenarios, the six test subjects each experienced workload values differently, but predominantly found high SA during periods of low workload and low SA during periods of high workload (Endsley M. R., 1993). SA can also be measured from an adaptation of the Subjective Workload Dominance technique (SA-SWORD) (AFRL, 2002).



Workload versus SA can exist in four distinct regions (Figure 5), sometimes disassociated from each other depending on operator capacity and motivation, system designs and the nature of the task itself (Endsley M. R., 1993). An unmotivated or inattentive operator may have low SA despite low workload. Low SA can also occur when the operator is confronted with too many tasks and SA demands are approaching overload. If that same operator experienced high, but attainable workload, it is possible to actively maintain high SA. The ultimate workstation design goal allows the operator to attain high SA with low workload, but the greatest challenge is maintaining that high SA during unavoidable periods of high workload (Endsley M. R., 1993).

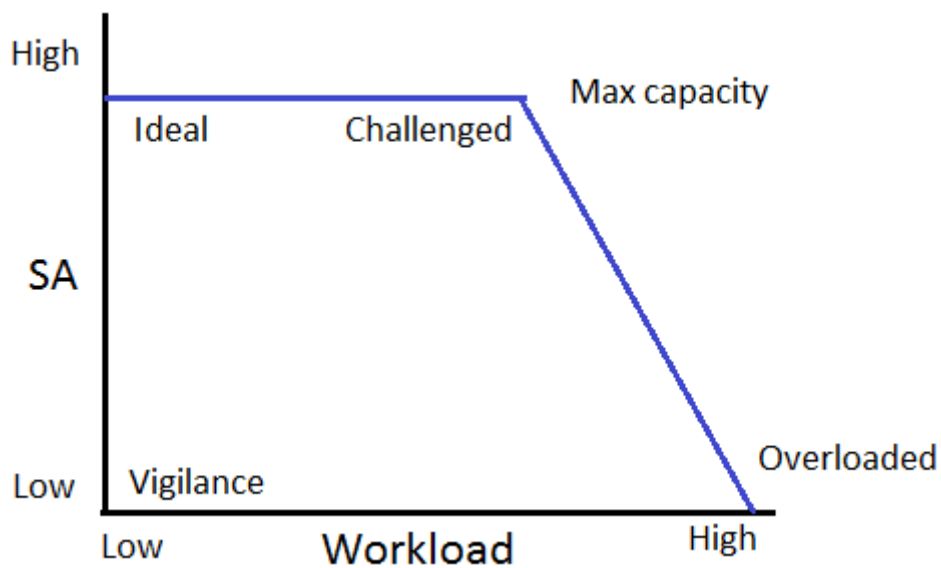


Figure 5: Workload vs. SA(Endsley M. R., 1993)

### *Cockpit Design, Automation, and Situation Awareness*

Because of the critical effects situation awareness has on mission outcome and survivability, designers and operators both have a vested interest in maintaining a high

level of SA. Operators develop procedures and train to maximize the use of all available tools and observations to increase SA. Designers can incorporate heads-up displays (HUD), multi-function displays, automation, expert systems, advanced avionics and sensors to provide more information in a more useful manner (Endsley M. R., 1988a). In this regard, for a given task, all cockpits are not created equal. Cockpit design affects both the number of required tasks, the workload of those tasks, and the information provided to the operator during their completion (Endsley M. R., 1995a). Automation and intelligent cockpits can tailor information needs or perform support functions based on the required situation (Secarea, 1990).

In one study pilots strongly preferred the cockpit display setup that was subjectively rated to have the best SA (Hughes, Hassoun, & Ward, 1990). Other sources of information, such as moving map displays or datalinks add to the quantity and quality of data available to aircrew. Datalinks can take many forms (not all of which are compatible), and many datalink programs exist in military aircraft and have been considered for the C-130, such as High Power Waveform (HPW), Combat Track II (CT2 or CTII), Real-Time Information in the Cockpit (RTIC), Situational Awareness Data Link (SADL), Link 16, SAMS-ESA, Airborne Broadcast Intelligence System (ABI), Joint Tactical Information Distribution System (JTIDS), Tactical Digital Information Link (TADIL), Military Internet Relay Chat (mIRC), (Linson, 2010; AFTTP 3-3.C-130E/H, 2010; Monto, 2001; Nielson, 2005; Poole, 2008; Redenius, 2011; Sexton, 1998; Talley, 2012). However, the mere quantity of information is not the only factor in developing SA—indeed too much can cause overload where less important information precludes the pilot from concentrating appropriate attention on important information —

but how well the operator perceives and comprehend that data into something meaningful (Endsley, Selcon, Hardiman, & Croft, 1998).

Simply by reducing the number of places a pilot is required to scan within the cockpit, increases attention resources available to the remaining scan areas. Thus a glass cockpit that can provide higher information density simultaneously reduces the workload required to attain SA but provides more SA in the same field of view. However, if the pilot neglects to maintain a scan elsewhere and becomes dependent or fixates on those information sources (namely, the HUD), then SA remains limited (Haynes, 1998; Shinaberry, 2013). Automation, while reducing workload, can place the pilot out of the feedback loop, which can result in delayed or missed cues (Endsley M. R., 1996; Norman D. A., 1989). Automation can also increase feedback or provide new methods of communicating feedback, which may alter how an operator must assimilate that data (Endsley M. R., 1996). Feedback comes in many forms, some of which may not be obvious to the designer or operator at the time of development. For instance, the F-16's fly-by-wire controls prevented vibration feedback that may have been felt in traditional mechanical flight controls as the aircraft approaches a stall (Kuipers, Kappers, van Holten, van Bergen, & Gosterveld, 1989). Thus, designers design other feedback mechanisms, such as stick-shakers and stick-pushers to augment information already present on other displays, such as raw airspeed or angle of attack (Kantowitz & Sorkin, 1983).

Pilots who become passive observers miss the SA developed by actively gathering and processing information (Endsley M. R., 1996). Research shows that passive information processing is inferior to actively devoting attention resources and


Level 2 SA was lower in automated systems despite the similar availability of Level 1 SA elements (Slamecka & Graf, 1978; Cowan, 1988; Endsley & Kiris, 1995). Many of the aircraft accidents described earlier in this chapter (and hundreds more) can ultimately be attributed to, or prevented by, SA despite the causal role of automation.

Ideally, a modern glass cockpit (and its attendant automation) must serve to support the development of SA (Adams & Pew, 1990). However, while automation might condense the pilot's scanning region, consolidate information, and reduce workload, the associated reduction in attention demand, coupled with a potential for complacency and information filtering can reduce SA (Parasuraman, Sheridan, & Wickens, 2000). By changing human behavior in the cockpit, automation affects vigilance and complacency (related to attention invested), allows the human operator to assume a more passive role, and alters the nature of the feedback loop (time, quality, or form) (Endsley M. R., 1996). While this could improve operator SA, depending on the tasks and means available to acquire SA, this could also place the operator out of the feedback or decision loop.

### ***Situation Awareness and Decision Making***

While situation awareness reflects a snapshot in time, it is a continuing process or cycle to observe, comprehend, and project in order to update and refine the mental model (Endsley M. R., 1988a). This refinement process is closely linked to decision theory, and especially the OODA loop. To resolve a complex problem with a preferred outcome based on situational responses, a decision maker follows a perceive-plan-act cycle (Secarea, 1990). First and foremost, the decision maker must classify and understand the situation (Endsley M. R., 1995a; Klein, Calderwood, & Clinton-Cirocco, 1986). Col.

John Boyd defined an observe-orient-decided-act (OODA) loop to describe the decision making process in an air-to-air engagement (Figure 6). The pilot who won the engagement made better decisions quicker than his opponent could react (Osinga, 2006). Thus the winning pilot controlled the initiative and forced his opponent into a less organized and ultimately losing set of reactions.

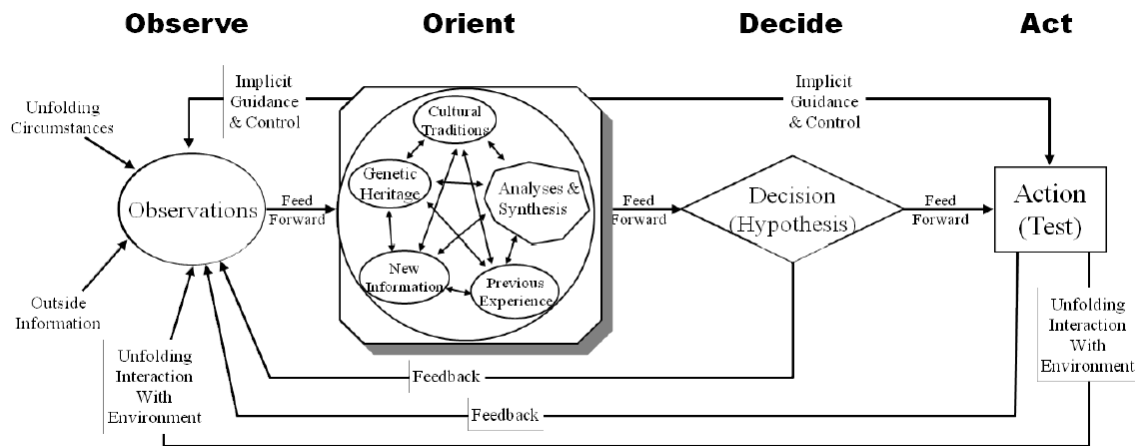

**Figure 6: OODA Loop(Boyd, 1995)**

Simply making decisions faster is not relevant if SA is inaccurate, since the resulting decisions, therefore actions, would be inappropriate (Endsley M. R., 1995a; Osinga, 2006). Failure to make adequate decisions can lead to aircraft accidents and combat losses. Poor decision making contributed to the shoot-down of Iranian airliner by the USS Vincennes (also mentioned in the automation section) because of poor SA due to a lack of good information available (Klein G. A., 1989a).

Perception, or observe and orient, relate to Endsley's first and second levels of SA, respectively. Projection, or level 3 SA formulates the basis of making the actual decision which the operator executes in the final step of the OODA Loop. Perhaps the

most crucial aspect in the OODA Loop is the operator's ability to quickly and accurately reassess conditions and iteratively develop his SA once that decision was put into action.

Indeed time pressure is a significant factor in decision making. One major solution to shortening the cycle (and achieve decision superiority) is to simplify the situation, or at least the perception thereof (Secarea, 1990). This can be done through pattern substitution, selective use of information, or using information in a more surface-level or shallow sense (Veltman, 2001). Another strategy is to shorten the time it takes to reach a decision. In a study, 95% of tactical decisions by ground commanders featured matching the situation to a memorized pattern instead of a more deliberative decision-making process (Kaempf, Wolf, & Miller, 1993). Individuals will try to use pattern matching as a heuristic for faster decision making; the results of which could come instantly or take considerable effort to reach (Klein G. A., 1989b; Hinsley, Hayes, & Simon, 1977). Furthermore, heuristic decision-making can fall victim to various cognitive biases. A time-constrained decision-maker is more likely to apply the sunk-cost fallacy to previously made decisions or apply a confirmation bias to evidence validating that decision (Veltman, 2001).

Thus, a pilot with a superior observational (level 1) SA and orientation (level 2) of his situation is likely to arrive at a decision sooner and with better quality inputs. Conversely, a pilot with poor SA would have poor performance unless the pilot realizes this (an act that would take a certain self-awareness) and takes corrective action (Endsley M. R., 1995a). Unless of course, the opposing pilot has even lower SA or the element of SA is irrelevant to the specific situation (Endsley M. R., 1993).

Humans are not apt at effectively reacting to random and unpredictable changes in their environment rapidly (Aretz, Guardino, Porterfield, & McClain, 1986). In an often-changing and dynamic environment, the difficulty of obtaining and maintaining SA is far greater than in a more stable and static environment (Endsley M. R., 1995a). Perfect situation awareness would naturally lead to superior decision making, yet obtaining perfect SA would require unlimited resources (Endsley M. R., 1988a). While a common set of core SA elements exists across any mission set or any part of a particular mission (i.e. aircraft performance, navigation, or system status), the relative priority and immediacy (i.e. immediate, intermediate, or long-term) of these elements are situation dependent (Endsley M. R., 1988a). The art of maintaining SA rests with the operator's ability to direct finite attention resources at the appropriate cues, observations and related tasks (Adams & Pew, 1990). This chore can become quite difficult if multiple high-priority tasks are competing for attention.

In order to mitigate demands for attention and SA, operators prioritize which elements of SA are most relevant to the situation at hand. During a mission, pilots prioritize and re-prioritize where to devote finite resources as the mission evolves (McDaniel, 1996). Pilots flying basic missions require SA regarding systems health, fuel status, navigational position, other air traffic, weather, and airfield conditions, just to name a few. If a pilot were flying a tactical mission, such as a formation low-level to an airdrop, then he requires SA on terrain and obstacle clearance, time status, airdrop parameters, formation position, and actions of the lead and following aircraft in addition to the aforementioned SA of a basic mission. If this tactical mission were to occur in combat, then SA requirements would grow to include defensive systems status, surface-

to-air threat capabilities and locations, enemy disposition, and actions of applicable friendly and enemy forces. In low-level flight terrain avoidance is the priority element of SA for the pilots, but may not be so for other aircrew members. During a threat engagement, defeating the missile becomes the priority with the pilot de-prioritizing or ignoring many other elements of SA as his intention becomes focused on defending the aircraft. However if the pilot focuses too much of his attention on one element, he loses SA on other, often critical elements of SA. The warning light may be ignored for a short while until the threat is defeated, but it may indicate an engine or other critical failure. If a pilot loses SA about his terrain clearance or aircraft performance, then he may place the aircraft in an untenable situation or impact terrain.

The importance of appropriate prioritization of attention resources to capture the most relevant SA cannot be overstated. There are multiple documented cases of pilots defending against an enemy threat system only to collide with the ground, therefore doing the enemy's job for them (Kuipers, Kappers, van Holten, van Bergen, & Gosterveld, 1989; AFTTP 3-3.C-130E/H, 2010; McCarthy, 1988). Many SA failures are caused by intentional attention shifts towards other factors that a pilot (erroneously) believes is more important due to a false or outdated mental model. However, the process of prioritization requires an understanding of the "big picture" (Endsley M. R., 1999). Paradoxically, the pilot must have some overall SA in order to accurately spend attention resources to gain and maintain SA.



### ***Team Situation Awareness***

Many tactical aircraft, such as the C-130, employ an aircrew team to accomplish the mission under the command of a pilot (as aircraft commander). Even single-pilot fighter aircraft employ in formation under a flight lead. Each member of the team has different SA priorities and responsibilities. Priorities are divided amongst the team for specialization, but many tasks will necessarily overlap, and an individual's SA is not neatly confined to just their specialization. For instance, a pilot may be primarily concerned with aircraft performance parameters, formation position, and terrain clearance. The navigator is primarily concerned with navigation, time status, and to some extent terrain clearance, but the pilot also shares these concerns to some degree. A flight engineer may primarily concern himself with fuel status, system health, and troubleshooting any faults, yet he may also concern himself with terrain clearance and aircraft performance as it affects safety of flight (perhaps not to the same level of scrutiny as the pilot's), and to an even lesser extent, processing navigator inputs. However if there is a system fault, then both the engineer's and pilot's attention, and thus SA priority, may shift to resolving the dealing with the fault, while the copilot and navigator continue to fly the mission. Thus, each member on the aircrew has overlapping areas of SA which contribute to a larger, shared team SA (Endsley M. R., 1995a).

However, SA is only as strong as the overlaps between required team members (Endsley M. R., 1995a). While a navigator may not require SA on systems health, if that navigator had perfect positional SA that was never shared with the pilot, then the pilot is still lost. In another situation one operator may have a critical piece of information (i.e. the navigator is the only person who can see the weather radar, or the pilot and copilot

have different displays presented at the time) which must be relayed to other relevant crew members. The process of relaying information to build team cohesion and SA is complex and partially captured in Crew Resource Management (CRM) training.

The systems designer can significantly change the quantity and quality of information sharing in the cockpit or between aircraft. Mosier and Chidester (1991) found that better performing teams actually communicated less than poorer performing teams, alluding to an efficiency of communication and group dynamics. Efficient communications result in a much higher signal-to-noise ratio; thus fewer words are needed to convey richer context. One element unique to team SA is that individual members have different goals and motivations, as well as capacity to perform work (Tremblay, Breton, Vachon, & Allen, 2012). While the nature of interpersonal interactions are complex and nearly impossible to predict, certain conclusions regarding team SA can be made. It is tempting to assume that synergistic SA effects can be realized in team settings, but if all members of a team possess identical information, there is no net gain in Level 1 SA. Indeed the shared mental model is distinct from the sum of its parts (Cooke, Stout, & Salas). However, similar information may be present to multiple members of a team, but not fully realized (i.e. both pilots have access to identical flight instrumentation, but the pilot-not-flying recognizes and reports a deviation to the pilot-flying, thus improving his SA). Ironically, the process of specialization and funneling information to the team can consequently degrade individual SA (Tremblay, Breton, Vachon, & Allen, 2012).

Not all members of the team need to be human. In a sense, automated and intelligent systems are part of a pilot's team. Just as levels of automation (discussed

earlier) exert different levels of control, decision support automation can serve as an assistant, associate, or coach—even changing levels of support and control depending on the specific situation (Veltman, 2001).

### ***Measuring Situation Awareness***

Measuring total SA poses a conundrum. At first glance measuring SA could be done with similar techniques to workload measurement: subjective questionnaires, asking a pilot in real-time during a simulation, and physiological measurements. For instance, an electroencephalogram (EEG) can measure electrical brain activity or eye tracking can measure if the operator is looking in the right place, but a correlation to perception awareness (level 1) is difficult, while comprehension and projection (levels 2 and 3) are elusive (Endsley M. R., 1988a; 1995b). That is, it may be possible to physiologically determine whether information is registered, but not possible to identify comprehension (Endsley M. R., 1995b). Performance measurements are objective and easy to obtain, but their potential for dissociation, as described above, makes establishing a correlation/causation relationship difficult (Endsley M. R., 1995b). An externally injected task could be used to evaluate SA in a controlled manner: a piece of information can be added or removed from an operator, and then both the response time and actions taken could be evaluated. Conversely, any internal observation of deviations from prescribed parameters is a specific measure of performance, which has more significance than performance measured generically or on the whole. However, performance is highly variable and subject to several inputs in addition or not related to SA (Endsley M. R., 1995b).

Questionnaires, while inexpensive and easy to use, are subject to more bias than workload measurements, since the experimenter is essentially asking the pilot not necessarily what he knew about his environment, but also how many unknowns remained unknown (Endsley M. R., 1995b). The phrase “ignorance is bliss” rings true: a pilot who has low SA or lost SA may not realize he has done so until after the fact, if at all (Endsley M. R., 1988a). This is especially true of self-assessments. If a trial went well, that may influence a test subject to report favorable SA, which may or may not be the case. Subjects can show biases based on the weight of importance they place on different elements of SA (Endsley M. R., 1995b). Subjective evaluation conducted after the experiment can be rationalized or generalized, thus resulting in inaccurate perceptions, especially as detail is lost or forgotten (Nisbett & Wilson, 1977). However, questionnaires can be used objectively and compare perceived SA against measurable global data points (Hermann, 1984). Automatic processing potentially masks reporting on comprehension of elements that exist in the operator’s subconscious (Endsley M. R., 1995a). Furthermore, SA itself is dynamic and complex involving so many factors that an overall assessment of low, medium, or high may be inappropriate. Real-time questioning of a pilot’s SA state, or externally injected tasks, adds more workload and could artificially detract from the SA available (Endsley M. R., 1988a; 1995b). One subjective workload assessment was used to develop the AIM-120 Advanced Medium-Range Air-to-Air Missile (AMRAAM). During the AMRAAM Operational Utility Test (OUE), SA was self-evaluated by the test subjects and also by a trained observer (McDonnell Douglas Aircraft Corporation, 1982). However in a re-evaluation of the OUE data showed a suspected bias between good performance and subject-reported high

SA (Venturino, Hamilton, & Dverchak, 1989). In a similar approach, a third party observer can independently rate the workload of a test subject. While removing some of the biases associated with self-assessment techniques, the observer cannot determine the subject's SA level unless some overt act, statement, or response from prompting occurs (Endsley M. R., 1995b).

Another subjective method, the Situation Awareness Rating Technique (SART) attempts to connect workload to SA by asking test subjects to rate the supply and demand relationship for attentional resources. As such, a positive correlation has been shown between SART and performance measures (Selcon & Taylor, 1990). SART is also highly correlated with subjective assessments of operator confidence levels (Endsley, Selcon, Hardiman, & Croft, 1998). SART has 14 components relevant to pilot SA which are evaluated on bipolar scales in three categories: demand on operator resources, supply of resources, and understanding of the situation. These categories are summed to provide an aggregate SART score (Selcon & Taylor, 1990; Endsley, Selcon, Hardiman, & Croft, 1998). Thus SART includes a subjective workload assessment as well as an SA assessment. While this linkage is handy, the subjective methodology of SART is susceptible to drawbacks commonly associated with subjective means, such as the "ignorance is bliss" fallacy (Endsley, Selcon, Hardiman, & Croft, 1998). Because of the combined scales, SART may not provide significant causality to explain the dissociation between workload and SA and may leave the experimenter wanting for more data (Endsley M. R., 1993; Endsley, Selcon, Hardiman, & Croft, 1998; Selcon, Taylor, & Koritsas, 1991).

Endsley (1988a) developed an objective method of measuring situation awareness called the Situation Awareness Global Assessment Technique (SAGAT). SAGAT has been used to study human-machine interfaces (Bolstad & Endsley, 1990; Northrop Corp, 1988; Endsley M. R., 1988a; 1989; 1990a). In SAGAT, pilots are asked to fly a mission scenario in a simulator. At random points in time the simulator is paused and display screens are blanked. The pilot is then asked a series of questions regarding the situation at that instant. These questions cover both the immediate, short-term environment and elements requiring recall from earlier in the simulation. The process is repeated several times with a large question bank selected at random to sample along primary and less important elements of SA. The pilot's responses are compared to simulator data to evaluate his perception against reality(Endsley M. R., 1988a; 2000). Because questions are asked as the simulation is paused, SAGAT is a low-intrusive form of evaluation that also samples in real-time without the loss of fidelity of a post-experiment questionnaire. The nature of the questions can also evaluate level 1, 2 or 3 SA (Endsley M. R., 2000). The stochastic time interval and sampling recall prevents the test subject from anticipating responses (Endsley M. R., 1995b). With a statistically significant pool of responses and computer-captured performance data, SAGAT becomes an objective method of SA evaluation. In addition to being an empirical analysis of existing prototypes, SAGAT has predictive validity (Endsley M. R., 1990a). In a study of fighter cockpits comparing SART and SAGAT, it was found that there was no direct correlation in results between subjective SART scores and objective SAGAT results (Endsley, Selcon, Hardiman, & Croft, 1998). For the same set of conditions, SART evaluations indicated higher SA for a given cockpit display, while SAGAT recorded mixed and lower

results for Level 1 SA. In the same test, the new cockpit display showed higher Level 2 and lower Level 3 SA for both means. Overall, SART, particularly the “understanding” component, correlated well with simple subjective self-evaluations for both sufficiency and confidence level. All SART components were inter-correlated with each other. Of the 13 variables collected during the SAGAT analysis of this experiment, each variable was found to be independent, which led the investigators to conclude that compiling a total SA score was not of particular value. Because of this, no clear relationship between independent SAGAT variables and the SART rating could be identified. However, the authors found that, despite the lack of correlation, SART was particularly useful for determining an overall SA score and would be useful in real-life flight testing, where SAGAT could be used to diagnose and detail specific effects at the human-machine interface (Endsley, Selcon, Hardiman, & Croft, 1998).

SAGAT has also been applied to human performance modeling (Plott, Endsley, & Strater, 2004). The SAGAT scoring method was incorporated into a task network for a battle station in a future ship design. The task network in question was written to store SA-related variables as a reflection of operator working memory. Various parameters were devised as contributing towards SA based on SAGAT questions, and these parameters could compose a total SA score. Because it is a simulation, the simulated operator had perfect memory and committed no errors, thus representing a best-case scenario(Plott, Endsley, & Strater, 2004).

## **Description of C-130H and C-130J Aircraft**

The C-130H is an upgraded iteration of the C-130E aircraft produced through the 1960s. Within the C-130H fleet (produced since 1974) are several sub-variants, known as C-130H1, H2, and H3. The C-130H (all sub-variants) requires a basic crew of five: aircraft commander (pilot), copilot, navigator, flight engineer, and loadmaster (U.S. Air Force, 2003). The aircraft commander must be a pilot, but may sit in either the left (pilot) or right (copilot) seat. Duties and responsibilities for each crew position are described in Chapter 3. For most tactical missions, a second loadmaster is added to bring the typical combat crew compliment to six (AFI 11-2C-130, Vol 3, 2010).

The C-130J, which entered the USAF inventory in 1999, while bearing a similar external appearance to the C-130H, features such significant design changes that it is considered a different Mission Design Series (MDS) with a separate training and qualification program. The C-130J is a clean break from the iterative C-130 evolution, hence the “legacy” moniker applied to the A/B/E/H variants (Musser, 2013). Modern avionics and enhanced automation reduce the crew compliment to three: aircraft commander (pilot), copilot, and loadmaster (AFI 11-2C-130J, Vol 3, 2009; TO 1C-130J-1, 2009). Just like the C-130H, a typical combat crew adds a second loadmaster (AFI 11-2C-130J, Vol 3, 2009). Early operational experience shows the C-130J has an increased mission capable rate (93.9% versus 75%) and a reduced preflight time compared to the C-130H (Lockheed-Martin, 2005; Burgess, 2005; Oviedo, 2005).

The C-130J features some performance upgrades: a more efficient propeller, more powerful engine, and a Full Authority Digital Engine Controller (FADEC) which can command an automatic engine shutdown and/or automatically feather the propellers (TO



1C-130J-1, 2009). However, most of the improvement and upgrades to the C-130J are modern avionics. The C-130J features full color multifunction displays (MFDs), a heads-up display (HUD), a digital moving map, and integrated threat warning and systems monitoring features. The addition of autothrottles and an improved autopilot allows for autopilot-coupled formation flying. This represents an entirely new cockpit and a radical departure from legacy cockpit design. Conversely, the C-130H features several incremental upgrades to avionics subsystems, but still relies heavily on analog gauges. For a more detailed qualitative analysis of the C-130 series, refer to Appendix A: Description of C-130 Aircraft.

The two-pilot C-130J was anecdotally assessed by one officer to be 90% as capable as the C-130H with the autopilot-coupled SKE formation able to best take advantage of the advanced avionics (Burgess, 2005). Specifically threat detection and communications under high workload were considered the most significant limitations to a two-person cockpit (Burgess, 2005). In complex integrated combat environments, all aircraft radios are pressed into service, however each person can only effectively manage (transmit and receive) on one radio at a time. Because Pilot SA is built both visually and through radio communications, there is a higher possibility of important missed communications on smaller aircrews (Burgess, 2005).

On complex missions, such as an airdrop utilizing the Joint Precision Airdrop System (JPADS), another pilot or even a “legacy” navigator must be added to the C-130J to operate specific mission equipment (AFI 11-2C-130J, Vol 3, 2009; Hendrickson, 2008). Adding an additional crew member is not uncommon, as can be seen in contingency C-17 operations for both task distribution, ground operations safety,

operating extra command and control communications equipment, traffic, and threat scanning (Brockman, 2010). Augmenting a basic combat crew adds extra sets of eyes to scan for surface-to-air and air-to-air threats. This lookout doctrine is highly emphasized in the tactical airlift community and involves each member of the crew, including the loadmaster. Thus, because a scanner cannot see in all places at all times, having fewer scanners increases the possibility of missing threats, especially when other cockpit tasks must be performed (Burgess, 2005).

### **Discrete-Event Simulation**

Discrete-event simulation (DES) is a software-driven tool that can analytically predict outcomes, or improve existing task flows without requiring the expense or existence of an operational prototype (Rusnock & Geiger, 2013; Mitchell, 2000). Because of its empirical nature, DES can corroborate other methods of workload measurement (Mitchell, 2000). Instead of a perfectly continuous simulation, DES runs many activity-based discrete time increments and calculates an output for each time step. Furthermore DES can be dynamic and stochastic, allowing real-world randomness to be simulated and dynamic decision pathways to emerge based on different input or stochastic conditions. In human performance modeling, DES is used to evaluate the interaction between human operators and machines, especially in measuring mental workload (Rusnock & Geiger, 2013).

The programmer first defines a mission model from a task network, which includes all mission tasks in sequence. Each task has an assigned operator, finite execution time distribution (a stochastic variable), and workload demand values assigned

to it. From this completed task network, DES can compute a time-based workload score. By applying relevant capacity theory and a defined operator capacity, and the overload conditions can be determined. This experienced workload dynamically correlates to a predictive human performance value. When a prototype becomes available for testing, the DES results can be reproduced and the DES validated against conventional workload measurements.

IMPRINT (Improved Performance Research Integration Tool) is DES software created after merging the functionality of several earlier software tools (WinCrew, MAN-SEVAL, and CREWCUT) developed by the Army Research Laboratory and is now the primary human performance modeling tool for the US Army (Mitchell, 2000; Cassenti, Kelley, & Carlson, 2010). In the IMPRINT software, a modified VACP scoring methodology is used (Table 5). Incremental and task workloads are scored with cumulative VACP scores (i.e. a task can have any combination of Visual, Auditory, Cognitive, etc components). Total workload is calculated by summing the workload values for each discrete task and across all tasks performed simultaneously. In addition to computing a time-distributed workload value, IMPRINT can include a multitude of user-defined variables that allow for model randomness over multiple runs. The programmer can code different decision pathways to dynamically change the critical path based on defined release conditions.

**Table 5: IMPRINT VACP Values (Mitchell, 2000; Alion Science, 2013)**

| Scale<br>Values | Descriptors                                  |
|-----------------|----------------------------------------------|
| <u>Visual</u>   |                                              |
| 0.0             | No activity                                  |
| 1.0             | Visually Register/Detect occurrence of image |

|                           |                                                                   |
|---------------------------|-------------------------------------------------------------------|
| 5.0                       | Discriminate symbols, numbers, words                              |
| 3.0                       | Visually inspect/check (discrete inspection/static condition)     |
| 4.0                       | Visually locate/align (selective orientation)                     |
| 4.4                       | Visually track/follow                                             |
| 5.1                       | Read (symbol)                                                     |
| 6.0                       | Visually scan/search/monitor (continuous/serial inspection)       |
| <b><u>Auditory</u></b>    |                                                                   |
| 0.0                       | No activity                                                       |
| 1.0                       | Detect occurrence of sound                                        |
| 2.0                       | Orient to sound (general orientation/attention)                   |
| 4.2                       | Orient to sound (selective orientation/attention)                 |
| 4.3                       | Verify auditory feedback (detect occurrence of anticipated sound) |
| 3.0                       | Interpret semantic content (Speech) Simple (1-2 Words)            |
| 6.0                       | Interpret semantic content (Speech) Complex (sentence)            |
| 6.6                       | Discriminate sound characteristics (detect auditory difference)   |
| 7.0                       | Interpret sound patterns (pulse rates, etc)                       |
| <b><u>Cognitive</u></b>   |                                                                   |
| 0.0                       | No activity                                                       |
| 1.0                       | Automatic (simple association)                                    |
| 1.2                       | Alternative selection                                             |
| 4.6                       | Evaluation (consider single aspect)                               |
| 5.0                       | Rehearsal                                                         |
| 5.3                       | Encoding/decoding, recall                                         |
| 6.8                       | Evaluation (considering several aspects)                          |
| 7.0                       | Estimation, calculation, conversion                               |
| <b><u>Fine Motor</u></b>  |                                                                   |
| 0.0                       | No activity                                                       |
| 2.2                       | Discrete actuation (button, toggle, trigger)                      |
| 2.6                       | Continuous adjustable (fight controls, sensor controls, etc)      |
| 4.6                       | Manual (tracking)                                                 |
| 5.5                       | Discrete adjustable (variable dial, etc)                          |
| 6.5                       | Symbolic production (writing)                                     |
| 7.0                       | Serial discrete manipulation (keyboard entries)                   |
| <b><u>Gross Motor</u></b> |                                                                   |
| 0.0                       | No activity                                                       |
| 1.0                       | Walking on level terrain                                          |
| 2.0                       | Walking on uneven terrain                                         |
| 3.0                       | Jogging on level terrain                                          |
| 3.5                       | Heavy lifting                                                     |
| 5.0                       | Jogging on uneven terrain                                         |
| 6.0                       | Complex Climbing                                                  |
| <b><u>Tactile</u></b>     |                                                                   |
| 0.0                       | No activity                                                       |
| 1.0                       | Alerting                                                          |
| 2.0                       | Simple Discrimination                                             |
| 3.0                       | Complex symbolic information                                      |
| <b><u>Speech</u></b>      |                                                                   |
| 0.0                       | No activity                                                       |
| 2.0                       | Simple (1-2 words)                                                |
| 4.0                       | Complex (sentence)                                                |

Algorithms embedded in IMPRINT allow for limited human performance measurements primarily based on total workload: time to complete a task, likelihood of task success, accuracy penalties, and task initiation time delays. These performance measurements show the effect of Wickens' Multiple Resource Theory, therefore conflicting channels will have different impacts to operator workload and performance than tasks that do not cause channel conflicts (Alion Science, 2013; Cassenti, Kelley, & Carlson, 2010; Mitchell, 2000). Operator capacities and overload threshold can be user-defined, and stressors, such as fatigue, environmental conditions, night vision goggle usage, or personal equipment (i.e. chemical warfare gear) can be included to further affect capacity. Finally, the programmer can choose to employ and compare workload strategies for each operator for the duration of the model. Strategy application and performance degradation do not have to wait until the operator is overloaded, but can be determined as the workload increases prior to overload (Cassenti, Kelley, & Carlson, 2010).

Another workload-performance DES is The Workload Index (W/INDEX). Like IMPRINT, it allows a crew station designer evaluate the workload design of a crew station layout or procedure. W/INDEX also made its debut during the Army's LHX scout helicopter in 1983, but was also applied to the Advanced Tactical Fighter and the National Aerospace Plane. It computes total workload by summing discrete tasks along the course of a mission profile in a subroutine called the Interface/Activity Matrix. However, while IMPRINT calculates workload anytime a task is started or stopped (therefore there could be dozens or hundreds of workload calculations per second if the task network is complex), W/INDEX displays a five second running average of workload

from half-second discrete time iterations. W/INDEX uses a scale resembling VACP: visual, auditory, manual, and verbal with values being assigned on a 1-5 integer scale based on the perceived attentional demand. However, while IMPRINT assigns descriptors to VACP values, the W/INDEX values are definition-less and arbitrarily assigned by the programmer. Just like IMPRINT, W/INDEX applies Wickens' Multiple Resource Theory and attention-channel conflict penalties to the performance output (North & Riley, 1989).

Because IMPRINT allows user-defined code and macros, further refinements in performance measurements can be made. Cassenti and Kelley (2006) experimented with effects on performance when multiple simultaneous tasks are performed. Their experiment showed that increased workload has a predictive impact on performance similar to the arousal and performance-resource function described in Figure 1 and Figure 2 (Cassenti & Kelley, 2006). Interestingly, IMPRINT predicted lower performance for low workload conditions, presumably showing an underload condition (Cassenti & Kelley, 2006; Cassenti, Kelley, & Carlson, 2010). In another study, a simple evaluation or judgment task was set before a group of test subjects and the measured error rate was compared against the predictive IMPRINT performance for the same modeled task. While the task itself was of constant difficulty, time pressure was varied to affect experienced workload. The task was changed for each experiment to evaluate correlation between different cognitive task loads: alternative selection, signal detection, simple and complex evaluations.

One of the earliest applications of IMPRINT for human performance and workload modeling was for the Army's Light Helicopter (LHX) development in the

1980s (McCracken & Aldrich, 1984). IMPRINT's predictive utility was also used to design crew station on the UH-60 helicopter (Bierbaum, Szabo, & Aldrich, 1989). The recent ascendancy of unmanned aerial vehicles (UAVs) and remotely piloted aircraft (RPAs) has drawn considerable attention to pilot workload. While highly automated in basic flight, their mission—predominately Intelligence, Surveillance, and Reconnaissance (ISR)—is highly dynamic and can quickly potentially overload operators when engaged in real-time tracking. In several feasibility studies, workload from the control of a system of single or multiple RPAs was studied using IMPRINT (Colombi, Miller, Schneider, McGrogan, Long, & Plaga, 2011; Hunn, 2006; Hunn & Heuckeroth, 2006; Hunn, Schweitzer, Cahir, & Finch, 2008; Pomranky, 2006; Pomranky & Wojciechowski, 2007)(Scheider & McGrogan, 2011; Wickens, Dixon, & Chang, 2003). IMPRINT has also been used to evaluate robotic systems (Harriott, Zhang, & Adams, 2010; 2011; Harriott, Zhuang, Adams, & DeLoach, 2012; Cosenzo, Parasuraman, Novak, & Barnes, 2006), vehicles (Wojciechowski, 2006; Mao, Xie, Hu, & Su, 2013), and other systems. In an intelligence-related simulation, IMPRINT was shown to have good correlation of experienced workload with the NASA-TLX evaluation and a better correlation than physiological measurements such as EEG, mean flow velocity, and others (Rusnock & Geiger, 2013).

The C-130J has also been analyzed with IMPRINT. A sample single-aircraft airdrop mission was created using basic functions and modeled both the pilot and copilot. These functions included navigation to initial point (IP), navigation to the drop zone (DZ), the airdrop, and flying away from the DZ, along with sample communication tasks. The construction of the task network was derived from phone calls to and observations of

USAF C-130J units. Snapshots were used to capture data throughout the mission, such as periodic workload values and time spent heads-up versus heads-down (LaVine, 2010). This simulation showed during the baseline experiment that the pilot-flying spent 43% head's down managing tasks and 57% head's up ostensibly flying and observing, while the pilot-monitoring (the pilot not flying the aircraft) spend 25% heads-down, 41% heads up, and 34% unaccounted for or untasked. The workload graph depicted a sine wave of workload for both the pilot and copilot. This sine function increments up or down as a bloc when the mission moves into the next phase. While IMPRINT uses a default overload condition of 60 dimensionless workload units, the wave amplitude routinely exceeds 30 units, and the maximum observed workload value (at the airdrop release) exceeds 220 units (LaVine, 2010).

The next variation of this experiment had the simulated aircrew fly the same profile, but a change in drop zone must be programmed into the computer at 8 minutes into the simulation. Another iteration introduced a pop-up restricted operating zone (ROZ) that the aircrew must avoid. Since the pilot monitoring manipulates the computer, his workload increases considerably during the data entry phase. Part of this workload increase was the requirement for the pilot monitoring to make an adjustment to a laptop computer to display special use airspace, which drove more heads-down time. The experiment was run once again with a hypothetical digital moving map that negated the need for a laptop, which resulted in less workload to plot the ROZ and manipulate the navigation solution. In this experiment, IMPRINT proved the value in adding a digital moving map display to the C-130J (LaVine, 2010).



## Summary

Human performance in aviation is a complex phenomenon. Performance may be simply the ability to maintain certain parameters or successful task completion. However, performance is often more nuanced and complex: incorporating proper decision making and building situation awareness (SA). Fundamental to performance in complex, changing, unpredictable, and lethal tactical environments is decision superiority. The pilot who can make better decisions, faster than his opponent, will likely win an engagement, best described by Boyd's OODA loop. Essential to continued decision superiority is SA and having timely and proper feedback. Because SA underpins decision making and actions taken, it is the ultimate currency for performance in tactical aviation.

The relationship between workload and performance is well understood. Human performance modeling using discrete-event simulation has proven useful to predict workload, especially in systems where a prototype does not yet exist. While it's possible to map a task network into DES during the design phase, if done early, the simulation results lack resolution. Furthermore, workload stems not just from overt cockpit tasks, but from activities that are not strictly contained within a checklist: operational tactics and procedures, maneuvering, communication, and SA building all require cognitive resources.

Specifically, the connection between workload and SA, while variable and dissociative, is not quantifiable in the design phase. Yet, if SA is the ultimate commodity to tactical aviation, how does an engineer design a cockpit to assure maximum potential SA? Furthermore, with the incorporation of modern glass cockpits providing more

information to aircrews and taking over larger shares of cockpit duties, how does the tactical aviator remain in the most optimal level of control instead of becoming complacent and outvoted by the machine he flies? Plott, et. al (2004) may have been the first to attempt to predict potential SA using DES, but to date, no known attempt has been made to deterministically determine SA from both the tasks that create SA and the workload levels that reduce it.

Finally, the C-130, an oft-overlooked workhorse, is at a unique juncture. Research on aircrew workload, SA, automation, and cockpit design typically focus on commercial aviation or single-seat fighters, yet the C-130 is not fully airliner, nor fighter. The ongoing transition of the USAF from the legacy C-130H, one of the last aircraft with a flight engineer and a navigator, to the modern C-130J operating with a cockpit crew of two pilots, provides a glimpse of how drastically automation has redefined aircrew roles. This is a perfect opportunity to contrast a highly automated system with one that emphasizes manual operation in a tactical mission profile.

### **III. Methodology**

#### **Chapter Overview**

In order to evaluate the impact of automation on aircrew workload and situation awareness, two representative mission scenarios were chosen that adequately reflect the flight qualities of the C-130H and C-130J as currently employed. First, a task analysis elicits operators, task flows, and various decision points in order to construct a complete task network for each scenario. These task networks were modeled using the Improved Performance Research Integration Tool (IMPRINT), a discrete event simulation (DES) software tool. After model creation, the scenario simulations are run through IMPRINT, which output a time-dependent distributions for workload, situation awareness, and the relationship between the two. From these distributions, a qualitative analysis of the data, specifically describing workload “peaks” (i.e. above normal workload variations) and general characteristics about SA can be made. Running multiple iterations through a *t*-test can tell us if the data is statistically significant in order to quantitatively answer our investigative questions.

#### **Phase I: Task Analysis**

The C-130 was chosen as the candidate platform for this experiment because of the author’s familiarity with the airframe, cockpit variations, and simultaneous employment in the Air Force for identical missions between the legacy C-130H and the C-130J. Being a versatile tactical airlift platform, the C-130 has a wide variety of

mission sets that it is capable of performing. In virtually all missions currently employing a legacy C-130, either a C-130J is replacing the legacy platform or is planned to replace the legacy in the future.

For the purpose of this thesis, it would be impractical to study a side-by-side comparison of every mission set and special variant of the C-130 family. Furthermore, it would certainly be impossible to conceive and simulate every possible variation and scenario facing the aircrew. Thus, representative mission scenarios depicting a “typical” C-130 mission that depicts the differences in cockpit tasks were chosen. Two tactical airlift-unique mission sets stood out: formation airdrop and airland with maximum effort/assault procedures. Both missions encapsulate a significant percentage of tactical training time spent by Air Force C-130 aircrews.

Formation airdrop in inclement weather by use of station keeping equipment (SKE) exploits the difference in tasks associated with a pilot manually flying a formation position while simultaneously sending commands via push-button (C-130H) versus automatic formation position maintenance and control (C-130J). Maximum effort/assault airland demonstrates the unique capability of the C-130 and procedures to utilize austere and short airfields as well as the workload required to calculate tactical approach parameters and manage aircraft energy during the approach.

First, two representative mission scenarios were scripted: formation SKE airdrop, and single-aircraft maximum effort landing. Each of these mission scenarios ran parallel to a baseline function, “Basic Aircraft Control,” which contained the most common tasks related to flying the C-130: manipulating the flight controls, scanning instruments and systems, routine navigation and formation position maintenance, scanning for enemy

threats, listening to radios, etc. A task analysis initially written in narrative form was diagrammed via UML activity diagrams (Appendix E: UML Activity Diagrams). This task analysis identified several operators, who are internal to the system, as well as external actors that influence the system. From this, task flows between the actors are identified, and some decision points can be established. Thus, a full task network formed for each scenario. Some of these decision points are:

- Is the aircraft below 10,000 feet? (Can the cabin be depressurized)
- Is the aircraft in a safe position to drop?
- Has the aircraft been cleared to drop?
- Has the aircraft been cleared to land?
- Has the aircraft met all drop “contracts?”
- Is the aircraft below design limit speeds for flaps, landing gear, or doors?
- Is the aircraft in visual or instrument meteorological conditions?
- System malfunction (either induced or random)
- Surface-to-air threat engagement

Operators simulated in each model are the cockpit crew (Pilot, Copilot, Flight Engineer, and Navigator for C-130H and the Pilot and Copilot for C-130J). The Drop Zone (DZ) Controller, Air Traffic Control (ATC), Loadmaster, and Formation Leader are selectively modeled as external actors. Actions of external actors are only pertinent where they initiate a task performed by an operator. Externally initiating tasks is important to show how tasks must be delayed for an external event (i.e. being cleared by

ATC to land or a command from the formation lead) or aircraft transit time (the Pilot cannot descend the aircraft until it arrives at the descent point).

The primary task flow is derived from applicable checklists in TO 1C-130H-1 and TO 1C-130J-1. These checklists were the basis for the critical path tasks as it related to a verbal challenge-response and cockpit switch actuation. Checklists were written for flight deck aircrew, which conveniently provided a break point for operator-external actor interaction. Using AFTTP 3-3.C-130E/H and AFTTP 3-3.C-130J, a time-sequenced mission flow identifies significant events in timeline format. This flow also identified which tasks could be performed in parallel to the critical path and releases for tasks in the critical path. The aircraft operating procedures provided required employment procedures, commands, and procedures not explained in the flight manuals or tactics publications. Finally, in addition to the author, four subject matter experts with experience flying each mission scenario (in both C-130H and C-130J) provided a context to stitch together tasks gleaned from each publication.

## **Phase II: Build Baseline Simulation Model**

This task network is modeled in the discrete event simulation software, IMPRINT produced by Alion Science and Technology Corporation for the Army Research Laboratory. Designed as a product for the Army, IMPRINT has three related categories of actors, each with their own traits and analyses: Operators, Maintainers, and Supply/Support. However, only the Operators are applicable to this investigation. The cockpit crew represents the actors internal to the system. In the C-130J, this is the Pilot and Copilot, while in the C-130H, this is the Pilot, Copilot, Navigator, and Engineer.

In this study, the Pilot (C-130H and C-130J) acts as aircraft commander, flies the aircraft, initiates most checklists, and talks on the radio assigned to the formation frequency. The Copilot monitors the Pilot's flying performance, to include basic navigation and formation positioning. The Copilot manages radio assignments, manipulates SKE parameters, actuates the landing gear and flaps, and, in the C-130J, program and manipulates the navigation solution and troubleshooting through the Communication/Navigation/Identification-Management Unit (CNI-MU). The C-130H Navigator computes the airdrop release point, relays station keeping equipment (SKE) commands in conjunction with the Pilot, navigates the airplane (including maintaining an on-time status), initiates airdrop checklists, and manages the defensive systems. The Engineer is primarily responsible for monitoring aircraft systems health, troubleshooting malfunctions, preflight inspections, calculating takeoff and landing data (TOLD), and ensuring checklist completion. Each crew position assumes several overlapping roles that are not annotated in checklists or technical orders: threat scanning, basic navigation, monitoring aircraft performance, and ensuring safe operating parameters. Generic duties are described in (Table 6). Tasks performed by the C-130H Navigator and Engineer typically are assumed by C-130J avionics with data entry provided by non-flying pilot(s).

**Table 6: C-130H & C-130J Sample Allocation of Tasks**

| Basic Aircraft Control Tasks |                                                                                                                                                   |                                                                                                                |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| C-130H                       |                                                                                                                                                   | C-130J                                                                                                         |
| Pilot                        | Actuated flight controls (control yoke, throttles, rudder pedals)                                                                                 | Pilot                                                                                                          |
|                              | Call for checklists                                                                                                                               |                                                                                                                |
|                              | Taxi aircraft (on ground)                                                                                                                         |                                                                                                                |
|                              | Monitor aircraft performance (observe attitude, altitude, speed parameters)                                                                       |                                                                                                                |
|                              | Monitor navigation (observe heading, crosstrack, distance remaining, ground speed, calculate time status, read diagram, ensure terrain clearance) |                                                                                                                |
|                              | Listen (radios and aircrew inputs)                                                                                                                |                                                                                                                |
|                              | *Monitor formation position (observe position parameters, closure velocity and pursuit curve)                                                     |                                                                                                                |
|                              | Scan for threats (look outside**, listen to Radar Warning Receiver)                                                                               |                                                                                                                |
|                              | ***React to threat (call for threat/maneuver)                                                                                                     |                                                                                                                |
|                              | Observe weather radar                                                                                                                             |                                                                                                                |
| Copilot                      | Monitor aircraft performance (observe attitude, altitude, speed parameters)                                                                       | Copilot                                                                                                        |
|                              | Navigate (observe heading, crosstrack, distance remaining, ground speed, calculate time status, read chart, ensure terrain clearance)             |                                                                                                                |
|                              | Listen to radios                                                                                                                                  |                                                                                                                |
|                              | *Monitor formation position (observe position parameters, calculate closure velocity and pursuit                                                  |                                                                                                                |
|                              | Scan for threats (look outside**, listen to Radar Warning Receiver)                                                                               |                                                                                                                |
|                              | ***Call for threat/monitor safety of flight                                                                                                       |                                                                                                                |
|                              | ***Direct pilot corrections                                                                                                                       |                                                                                                                |
|                              | Manipulate SKE settings                                                                                                                           |                                                                                                                |
|                              | ***Make changes/update navigation system                                                                                                          |                                                                                                                |
|                              | Observe weather radar                                                                                                                             |                                                                                                                |
| Navigator                    | Navigate (observe heading, crosstrack, distance remaining, ground speed, calculate time status, read chart, ensure terrain clearance)             | Key                                                                                                            |
|                              | ***Make changes/update navigation system                                                                                                          |                                                                                                                |
|                              | Observe weather radar                                                                                                                             |                                                                                                                |
|                              | Listen to radios                                                                                                                                  |                                                                                                                |
|                              | ***Direct Pilot corrections                                                                                                                       |                                                                                                                |
|                              | Scan for threats (look outside**, listen to RWR)                                                                                                  |                                                                                                                |
| Engineer                     | Monitor aircraft performance (observe attitude, altitude, speed parameters)                                                                       | *Formation Only<br>**Applicable in Visual Meteorological Conditions (VMC) only<br>***Applicable only as needed |
|                              | Monitor systems health (engine, props, electrical, fuel, hydraulics, pressurization, etc)                                                         |                                                                                                                |
|                              | ***Troubleshoot system malfunctions                                                                                                               |                                                                                                                |
|                              | **Scan for threats (look outside)                                                                                                                 |                                                                                                                |
|                              | ***Call for threat/monitor safety of flight                                                                                                       |                                                                                                                |
|                              | ***Direct pilot corrections                                                                                                                       |                                                                                                                |
| Read checklists              |                                                                                                                                                   |                                                                                                                |



Tasks assigned to internal actors have task durations and workload values because they are of primary interest to the analysis. External actors, such as the Loadmaster, Air Traffic Control, Drop Zone Controller, and Formation Lead aircraft are only modeled to show interactions and control the release conditions of tasks assigned to internal actors. External actor tasks do not have a workload value and only have task durations where necessary. Internal actors each have a programmed workload threshold. Their capacity for work can further be modified through IMPRINT by adding environmental stressors such as heat, cold, chemical warfare gear, and night vision goggles, however these modifications are beyond the scope of the current research effort.

A separate Operations Model was constructed for each scenario and as a test bed for basic aircraft control. A model begins with a “START” task and ends with a model “END” task. When a simulation runs, an entity is created and flows through the task network until it reaches the model end node. In order to control large quantities of tasks, IMPRINT allows the modeler to nest subtasks into a larger function. Each function has its own start and end nodes. For both scenarios, each checklist was modeled as a separate function. Some complex task series, such as formation turns and descents, basic aircraft control and checklist steps with sub-tasks, are modeled as their own functions or sub-functions. Each major function for both aircraft and both scenarios are found in Appendix F: IMPRINT Task Networks.

A task begins when any entity reaches the task and a release condition is satisfied. This release condition is defaulted to start the task as soon as an entity reaches it, but it can be programmed in C# code. This C# code can release a task based on simulation clock time, Boolean logic, or other programmable variables. Because any entity can start

the task as soon as the release condition is true, a task can be performed multiple times or simultaneously with other tasks.

As a task is released, it has beginning and ending effects defined in C#, time distribution, workload values, and decision paths. The task duration can be expressed as a constant number, C# expression, or one of many possible distribution functions. To aid the programmer, IMPRINT also provides “micromodels” or algorithms of sample task durations for very simple task (i.e. look at item inside a field of view or read a set number of words). The micromodel can then be used to stitch together multiple motor and cognitive actions and applied to time distribution. Most task durations in this analysis are calculated using rectangular distributions using the micromodel-provided time as the mean value and an estimated range. Once a task is released, the beginning conditions are applied, the task duration is then executed, and finally any ending conditions are run.

After a task is completed it uses a decision path to lead to another task. These decision paths can be a single path, multiple (parallel) paths, tactical, or decision paths. A single path simply moves entities from the current task to the next one. Multiple paths split the entity into parallel processes. Tactical decisions release the entity to any of several follow-on tasks based on Boolean logic. Probabilistic decisions route the entity to one of several tasks based on a user-defined probabilities. However, in order to control the amount of entities flowing through the model, not all tasks included an exit path. Entry pathways and release conditions were coded such that critical path tasks only ran once (and when all pre-requisite conditions were met) and all repetitive tasks run an appropriate number of times.

The task network must be carefully controlled so that each operator only performs a reasonable number of tasks (generally 3 or less) at any given time. Thus, the task network is structured to show the operator cycling between several tasks instead of performing them all in parallel. For instance, to fly the aircraft, the Pilot must monitor several performance parameters, listen to the radio, and operate the throttles and flight controls. Instead of having the Pilot scan all his instruments simultaneously, each instrument is scanned individually in a cycle with more viewing time devoted to more important instruments. This greatly reduces repetitive tasks involved with basic aircraft control.

Each task performed by an internal actor (Pilot, Copilot, Navigator or Engineer) requires a task workload value. IMPRINT uses multiple resource theory and the VACP model of workload assignment. These mental resources are divided into seven channels: visual, auditory, cognitive, tactile, fine motor, gross motor, and speech. The assignment of resource channels is handled through the use of resource-interface pairs. Resources are VACP-resource channels while interfaces are user-defined areas of the cockpit. A given interface can utilize multiple resource channels and the modeler can assign any number of resource channels to a given interface (Figure 7).

| Interfaces        | Resources                           |                                     |                                     |                          |                                     |                                     |                                     |
|-------------------|-------------------------------------|-------------------------------------|-------------------------------------|--------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
|                   | Auditory                            | Cognitive                           | Fine Motor                          | Gross Motor              | Speech                              | Tactile                             | Visual                              |
| Control Yoke      | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            |
| CrewStation       | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |
| Engine Instrument | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |
| Instrument Panel  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |
| Intercom/Radio    | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            |
| Nav station       | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |
| Overhead panel    | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |
| Rudders           | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            |
| SCNS              | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |
| Side Panel        | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| Throttles         | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            |
| Window            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

**Figure 7: RI Pairing for C-130H**

The interfaces programmed for this analysis break down separate physical areas that are either not in the same field of view or are manipulated differently. A brief explanation of each interface follows:

Control Yoke: operated by the Pilot's left hand or the Copilot's right hand. It is used for pitch and roll inputs and radio/intercom transmissions from the pilots.

CrewStation: generic IMPRINT interface. This is used for tasks that do not fit neatly into one of the other interfaces such as note-taking, map reading, checklist usage, etc. Sometimes this interface is used to simulate the center pedestal.

Engine Instruments: center engine instrument stack on C-130H or on one of the C-130J multifunction displays. It is used by the Pilot, Copilot, and Engineer (C-130H only).

- Instrument Panel: Flight instruments located directly in front of the operator's seat.
- Intercom/Radio: Operator's microphone, headphones, and microphone switch. Since the pilots have microphone switch on the Control Yoke, their R-I pairing is split between the Control Yoke and Intercom/Radio. Note: the Engineer and Navigator (C-130H only) have pushbutton switches on their intercom cord and foot switches located in the floor.

- Nav Station: Primary interface for the Navigator (C-130H only) that cannot be reached by any other operator.
- Overhead Panel: panel mounted directly over the heads of the Pilot, Copilot and Engineer. Operated by the Engineer on the C-130H and the pilots on the C-130J.
- Rudders: floor-mounted panels operated by the pilots' feet to control yaw.
- SCNS: represent the navigation computer on the C-130H or the CNI-MU on the C-130J.
- Side Panel: represents all switches, circuit breakers, and indicators on the Pilot's left side or Copilot's right side. Also represents the SKE control panel on the C-130H.
- Throttles: operated by the Pilot's right hand or Copilot's left hand.
- Window: represents all tasks involving looking out of the cockpit windows or the C-130J Heads Up Display.

Consistent with Wickens' multiple resource theory, IMPRINT takes the resource-interface pairing assigned to each task and determines if a conflict in channels occurs when the simulation is run. IMPRINT can output a report that shows which channels conflict when, how many times, and a value showing the intensity of the conflict. This conflict value assigned by IMPRINT adds a workload penalty, which may induce a workload strategy.

Finally, as each scenario is constructed, the task flow is reviewed against the checklists, technical orders, regulations, and tactics that created the initial task analysis. For many task sequences, there are multiple ways in which a task is prompted or released in the real world: a proactive operator, a checklist reminder, or audible cue from the radio, aircraft, or other operator. The simulation is run to identify timing problems (i.e. tasks released prematurely or not at all), and eliminate instances where tasks are run too many times.

Perhaps the most significant challenge in ensuring a valid model involved assigning time durations to each task. The micromodels help calculate time involved in looking or pushing a button, but less precise actions, such as verbal responses, calculations, and radio calls could only be approximated reasonably. Most tasks used a rectangular distribution to capture a range of possible task times to be sampled randomly by the simulation. However, the model could not easily demonstrate random hesitation between task completion and the release of the next task. Scenario delays, such as aircraft transit time to a geographic point, could be expressed mathematically, but non-overloaded human operators are assumed to initiate the next task as soon as the previous task is complete and release conditions satisfied. This works reasonably well for completing steps in a checklist, but less so for checklist initiation and briefings (which may be completed prior to initiating a checklist or in the course of accomplishing the checklist). In those instances, a random delay variable was built into the release conditions to allow task initiation within a reasonable time window. While the author's own experience flying similar missions provides the bulk of subject matter expertise, other C-130 aviators were consulted to validate the procedures that constitute the task network.

### **Phase III: Perform Simulated Experiments**

The IMPRINT experiments are designed to answer the investigative questions from Chapter 1, namely measuring workload and situation awareness (SA). The experimental design is a 2x2 factorial design, with the independent variables consisting of the two scenarios and two cockpit configurations (aircraft). The scenario dictates

profile parameters (altitudes, distances, and turns) as well as checklists used (landing verses airdrop checklists). Automation usage is dependent on the aircraft being used (C-130J using more automation than the C-130H) and on the scenario. Workload values depend on the task network, which is directly dependent on both scenario and cockpit configuration. SA is dependent on workload and the activities in the task network. By directly comparing the C-130H and C-130J in the same scenario, then using the IMPRINT workload output, we can measure how automation affects workload during SKE formation airdrop and airland missions (investigative question #1 and 3). Using the novel SA algorithm (described below) to calculate SA in the simulation we can answer IQ #2 and 4: How does automation affect aircrew situation awareness (SA) during SKE formation airdrop/airland missions?

The first scenario is a SKE formation to a personnel airdrop (Formation Airdrop), and the second scenario is a single-aircraft airland to a landing zone (LZ) using maximum effort procedures (Airland). Each of these scenarios are classic examples of typical C-130 training or combat missions. While each scenario involves a different task network, each shares a common set of assumptions and variables. Each scenario (Formation Airdrop and Airland) has a different task network, the timing and quantity of task varies and thus the distribution of workload varies. The C-130H and C-130J have different cockpits: each with different cockpit configurations, operators (namely, the Navigator and Engineer on C-130H), and task networks associated. While the C-130H relies on the cockpit crew of four (Pilot, Copilot, Navigator, Engineer), the C-130J has a cockpit crew of two (Pilot and Copilot). This shifts several tasks to the pilots and to the automation while also eliminating or adding tasks. As a result, the C-130J relies on automated

features such as the Heads'-Up Display (HUD) and autopilot-coupled formation station keeping.

It is important to note that while in operational practice, it is common for Pilot and Copilot to share responsibilities and trade tasks according to who is flying the aircraft (pilot flying versus pilot not flying), it becomes increasingly complex to merge and shift tasks between duties explicitly assigned to the Pilot and Copilot and assumed tasks based on which pilot is flying. For simplicity, the Pilot is always flying the aircraft or directly monitoring the autopilot while the Copilot always performs pilot not flying duties.

The Air Force treats each airplane as a separate Mission Design Series (MDS), and has subsequently developed checklists, tactics, techniques, and procedures in separate publications from the C-130H. Thus, while the overall employment of the aircraft remains similar in concept, the flow and allocation of tasks are dramatically different and must be programmed into IMPRINT as such. Table 6 (see previous) describes the allocation of tasks for the parallel function of basic aircraft control. Many tasks are automated and therefore not directly performed by either operator in the C-130J. Generally speaking, the C-130J Copilot (by the virtue of being pilot not flying) assumes most of the tasks from the C-130H Navigator, while the aircraft automation assumes most of the Engineer's tasks.

Because of the ability to employ automation in the scenario, certain tasks shift from the operator to the automation, thus varying the workload distribution. Attention spent on tasks can have a positive, negative, or neutral impact on situation awareness (SA), particularly attention devoted to information gathering tasks. High workload can




also have an impact on SA, thus SA is dependent on total workload and the tasks themselves.

Some universal assumptions had to be made to limit variables in the scenario. While IMPRINT allows the modeler to incorporate workload strategies based on overload thresholds, this investigation deliberately excludes the use of this feature. Since the experiment is focused on the impacts of workload caused by different cockpit designs, workload strategies will mask overload and near-overload conditions. This ensures that time-dependent task demands manifest themselves as clearly as possible without the human's ability to adapt to maintain a high level of performance. It is of more interest to show where workload peaks occur, and the magnitude of those peaks, even if the total experienced workload is impossibly high. Thus, the reader can clearly identify where workload management strategies must be employed and procedural or engineering changes need to be made. To summarize, the following initial assumptions were made:


- Operator workload thresholds initially fixed at 60 units
- All operators share an equal capacity for work
- No workload strategies will be employed by any operator
- Channel conflicts not included
- For the vast majority of tasks, no degree of hesitation to release and start a task, provided requisite release conditions (if any) are met
- The Pilot is always flying (or monitoring the autopilot), while the Copilot is always performing pilot not flying duties
- Operators do not commit errors, therefore all initiated tasks have a 100% chance of successful completion

### ***Basic Aircraft Control Model***

The Basic Aircraft Control function was written separately from either baseline scenario. This was to ease compiling and troubleshooting since many sub functions repeated multiple times during a simulation run. The Basic Aircraft Control function was also the most difficult to contain the number of entities to a reasonable quantity (i.e. prevent the operator from performing an impractical or impossible number of tasks simultaneously). The Basic Aircraft Control Function contains all of the repetitive, ongoing tasks that the crew performs while in flight: manually flying the aircraft, monitoring performance, navigation, monitoring formation position, monitoring aircraft systems, scanning for threats, and listening to radios (Figure 8, Figure 9). When the simulation starts, the sub-functions “Listen to Radios” and “Scan for Threats” run independently and loop internally until the simulation is halted or the aircraft is on the ground.

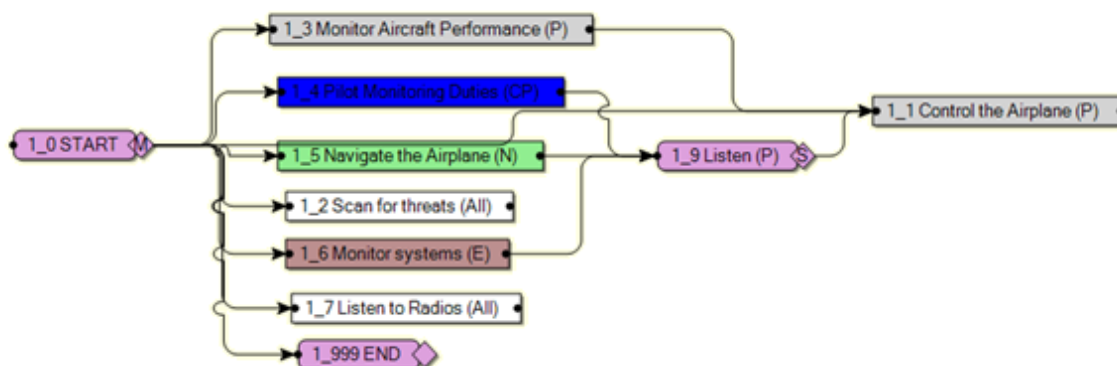

**Figure 8: Basic Aircraft Control (C-130H)**

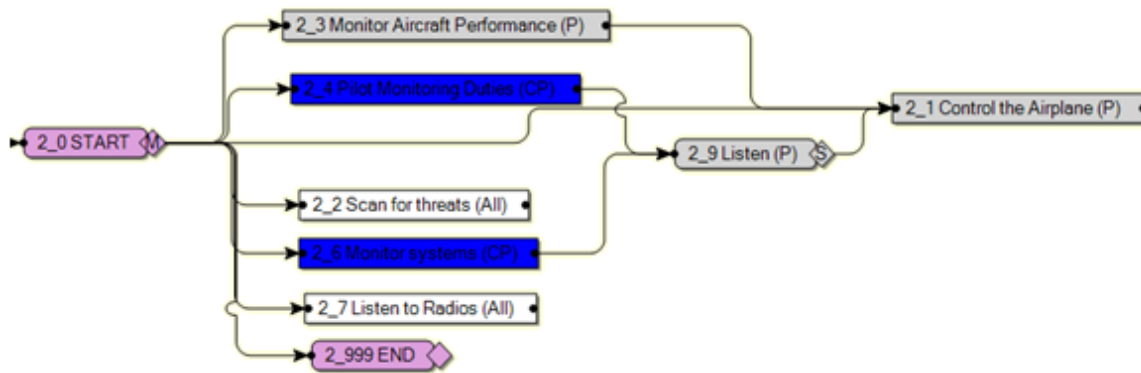

**Figure 9: Basic Aircraft Control (C-130J)**

All operators begin the simulation performing their respective monitoring tasks. Each operator will continuously monitor an instrument for a short time, then loop back to a routing task to monitor a different instrument. If observed aircraft performance is outside of an arbitrary tolerance (the tolerance itself is arbitrary because an operator's threshold for correcting performance is variable depending on the situation and team), then that operator executes a correction task, which necessitates an active response from the pilot in the Control the Airplane function. Thus the Pilot is reacting to feedback given by the crew and his own observed performance feedback. Since not each performance measure is observed an identical number of times (i.e. the Pilot will observe altitude, attitude, and heading more than chart reading), the routing tasks assign a probabilistic decision path according to perceived level of importance to that operator. Probabilistic decision paths are also used to determine the number of corrections given to the pilot versus making no correction (the "Do Nothing" task).


Some adaptability was built into the Basic Aircraft Control function. If the formation variable is false, then the sub-functions for monitoring and controlling formation position were deactivated. The automation variable controls whether most

monitoring, correcting, and controlling tasks need to be performed. If the aircraft is flying in adverse weather (instrument meteorological conditions), the aircrew cannot see out of the window, then they are not tasked to visually scan for threats. Presence of weather and altitude dictate how much, if any, time is spent examining the radar or performing terrain avoidance tasks (such as chart reading and visually clearing terrain through the window). Finally, the whole function will halt when the aircraft is no longer flying (i.e. landing and ground operations in the Maximum Effort Airland scenario). The combination of variables provides necessary flexibility to work in both scenarios and several alternative variations.


### ***Scenario 1: Formation SKE Airdrop***

The first mission scenario chosen is a formation personnel airdrop using Station Keeping Equipment (SKE). This scenario models an aircrew as an element leader (i.e. the third aircraft) in a multi-aircraft formation. Thus the aircrew must maintain a formation position and also relay commands to following aircraft. SKE Formation captures several differences between the C-130H and C-130J: manual versus automatic formation commands, manual aircraft control versus autopilot, navigation systems, and information presentation. Most of these differences are from the C-130J's use of the Coordinated Aircraft Positioning System (CAPS) in conjunction with SKE. In the baseline version of this scenario, the C-130H Pilot manually flies the aircraft and the Navigator performs required radar updates. The C-130J Pilot monitors CAPS maintain SKE position and the computer performs an automatic drop.

The scenario begins 20 minutes prior to the airdrop with the formation at an enroute altitude of 11,000 feet and airspeed of 200 knots (Figure 10, Figure 11). The formation must descend to 3000 feet and turn at the initial point (IP). During this first portion, the aircrew is executing the Preslowdown Checklist. Then, the formation slows from enroute airspeed to drop airspeed of 130 knots and descends to 2000 feet while the aircrew completes the Slowdown Checklist. When the aircraft crosses the drop zone (DZ), the Pilot must maintain a constant heading and a stable formation position as the paratroopers jump out of the aircraft and the Release Point checklist is run. At the end of the DZ, the aircrew runs Completion of Drop Checklist, and the formation climbs away and turns to an escape heading. A detailed narrative describing the SKE Formation scenario is found in Appendix B: Detailed Scenario Narratives.

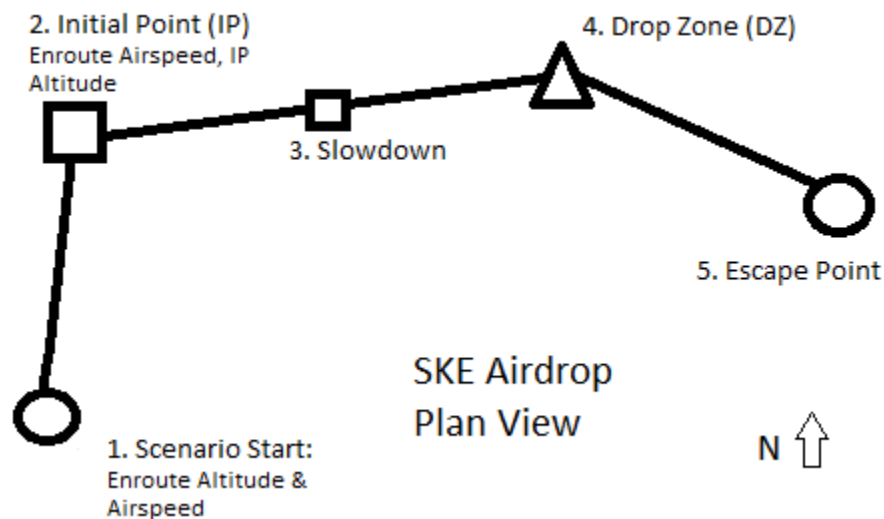


**Figure 10: SKE Formation Airdrop scenario Plan View**

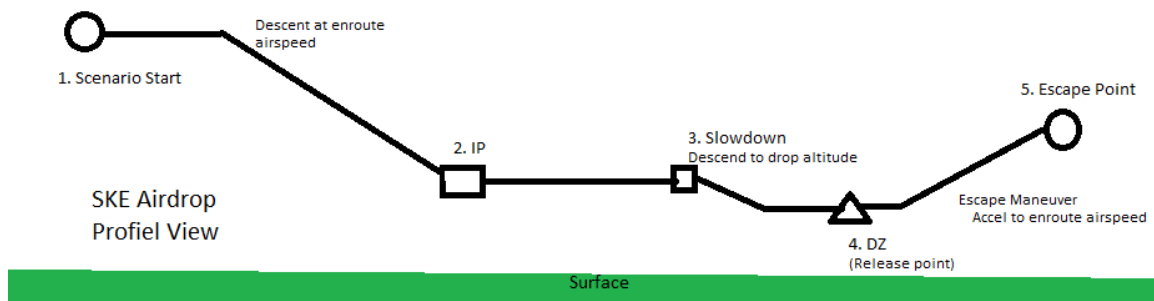

**Figure 11: SKE Formation Airdrop scenario Profile View**

### ***Scenario 2: Single Aircraft Tactical Arrival/Maximum Effort Airland***

This scenario features a penetration descent: a steep, high-speed descent profiles with minimum slowdown distances and steep final approaches into the landing zone (LZ). The penetration descent requires precise obstacle awareness and is difficult to assess and correct energy deviations (AFTTP 3-3.C-130J, 2010; AFTTP 3-3.C-130E/H, 2010). The C-130J and C-130H have different tools to evaluate energy state and progress along this profile but construct them in the same manner. Aircrews construct an energy profile (altitude vs. distance) working backwards from the approach end of the LZ until enroute altitude (Figure 12). This profile consists of a high-speed penetration segment, a level slowdown, and a final approach to landing. While both aircrews must calculate their approach parameters, they monitor performance differently. The C-130J incorporates more sophisticated data through the multifunction display (MFD), moving map, and heads-up display (HUD), the C-130H crew relies more on “eyeballing” out of the window, basic instrumentation, and raw computer data.

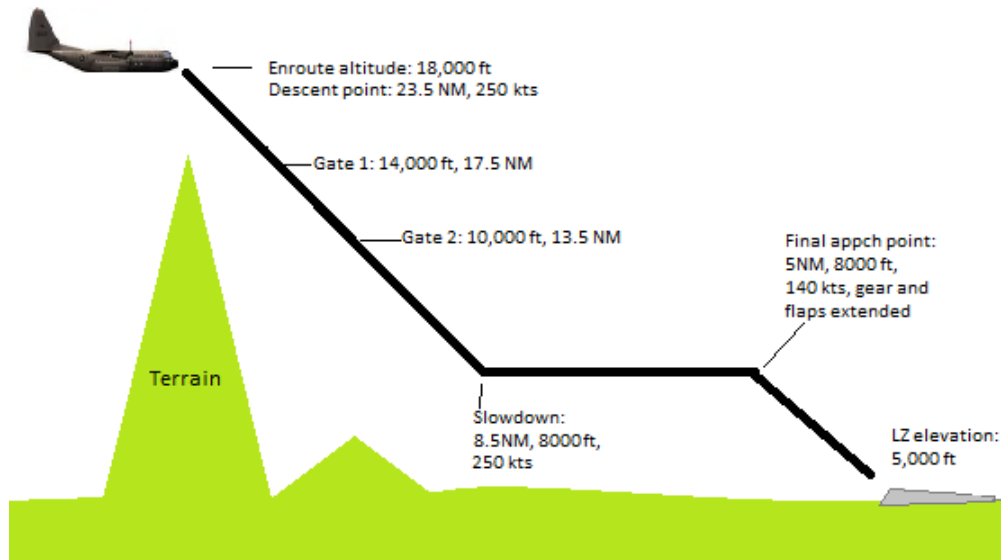

**Figure 12: Sample Penetration Descent Profile**

The baseline simulation starts at an enroute altitude of 18,000 feet with the autopilot engaged. After computing performance data, the aircrew descends to 6,000 feet, levels-off, then slows down and configures the aircraft for landing. The configuration and final approach phase exploit the different internal crew communications for checklists and advisories, as well as the Pilot's ability to judge touchdown point using the HUD or the window. After landing, the aircraft taxis and parks to conduct an offload. The scenario ends with completion of offload and clearance to taxi.

### ***Measuring Workload and Situation Awareness***


Of primary importance to this experiment is the measurement of workload distribution. IMPRINT measures operator experienced workload by computing the combined VACP scores for each task being performed by the operator at that time. As each simulation is run, a time-based workload distribution is computed in table and graphical form. From this output, statistically significant workload peaks can be

identified and measured. The total number of significant peaks, their magnitude and duration, as well as tasks associated with these peaks provide context for why these periods experience high workload. Due to the complexity of the task networks and cycling of basic tasks from the Basic Aircraft Control function, considerable workload noise should be expected to develop in the form of a sine wave. This wave measures the average experienced workload for each operator, and when compared with the workload peaks, conclusions are drawn regarding which aircraft works harder on average and which aircraft is more prone to overload conditions.

Corresponding to Endsley's research (1993) and Figure 5 (from Chapter 2), there exists a real and dependent but dissociate connection between workload and SA. Similar to Plott, Endsley, and Strater's study of predictive SA and human performance modeling (2004), human error is excluded from the model, thus resulting in a best case or optimistic estimation of potential SA. This experiment assumes that some of the operator's available cognitive resources are utilized to gain a strategic awareness of the environment. Thus, available cognitive resources up to a point of overload, represent the potential to gain SA. This potential SA remains high until the operator approaches cognitive overload, which this study is defining as a workload threshold of 60 to be consistent with other IMPRINT studies, including the sample IMPRINT models for the AH-64, CH-47, and UH-60 helicopters (Bierbaum, Szabo, & Aldrich, 1989; Mitchell, 2000; Alion Science, 2013). In this model, SA degrades as workload increases. Note that there is no degradation of SA for an underloaded or bored operator. Potential SA reflects the operator's perception of the environment (Level 1 SA) and is not directly attributed to any specific task in the task network, but rather this strategic SA metric is a



separate task represented by the SA function (Figure 13). This function captures strategic SA acquired from non-scripted attention or SA drawn from stored memory. It is desired that this scoring methodology be compatible with a SAGAT evaluation that could be conducted in a simulator or in-flight experiment, but validation using specific SAGAT questions is beyond the scope of the current effort. Instead, these tasks measure strategic SA generically by attempting to describe the untasked capacity that the operator uses to devote attention to the operator-determined SA priorities at that time.

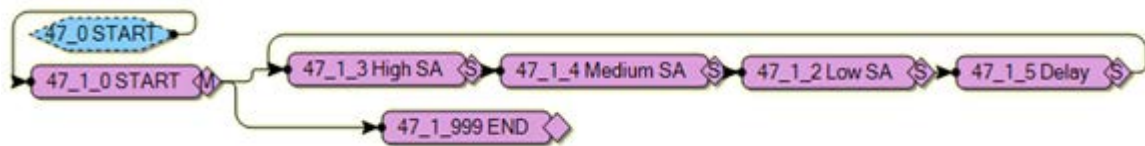

**Figure 13: Strategic Situation Awareness Function**

To measure Strategic SA, a separate SA function was created to reflect workload-based SA in three levels: high, medium, and low (Figure 13). The operator will only occupy one of these levels of SA at a time. High SA is when workload is less than 40 (out of 60), Medium SA occurs when workload is between 40 and 45, and Low SA is when workload is between 45 and 50. Above a workload of 50, the operator is close enough to overload that a potential for strategic SA will not register. These workload threshold were chosen based on the workload experienced from the baseline basic aircraft control activities and the IMPRINT default overload threshold of 60 and to mirror the structure of Endsley's SA/Workload function (Figure 5). These SA tasks assign a generic strategic component to the SA variable assigned to each operator. Since SA is both a result and generator of workload, the strategic SA function also induces cognitive workload according to the amount of SA. Using the VACP scoring method, High SA

incurs a cognitive workload score of 6.8 (Evaluation/Judgment considering multiple factors), Medium SA incurs a workload of 4.6 (Evaluation/Judgment considering a single factor), and Low SA incurs a workload of 1.2 (Alternative selection).

In addition to available cognitive resources contributing to strategic SA, specific tasks add to specific elements of SA. These tasks increment the SA of the operator performing them for the time that the task is being performed. To distinguish task-specific SA with generic, strategic SA, these SA values are referred to as “tactical SA.” While it is possible for the operator to retain that SA in short-term memory, to control the SA score, each task is de-incremented after completion, thus emphasizing attention devoted to tasks that increase SA. Theoretically, any tactical SA gained by completing a given task, should become part of the immediate strategic SA once the task is complete. However, modeling the decay rates of tactical SA due to memory loss is beyond the scope of this current research, and thus tactical SA is assumed to end immediately as attention shifts away from the current task contributing to tactical SA. Relevant elements of tactical SA can then be stored as strategic SA.

In order to quantify the relative contributions that each individual task contributes to tactical SA, a survey (Appendix C: Situation Awareness Task Assessment) was sent to 15 aviators representing pilots, navigators, engineers, and special mission aviators in a host of platforms, but with emphasis on past or current C-130 or HUD experience. This survey distilled the 1200+ task nodes in the IMPRINT model into 19 main categories. Respondents were asked to rate the relative impact to SA for accomplishing each task (compared to a baseline of flying with one’s eyes closed) on a scale from -3 to +3, where

negative values detract from SA, zero equals no affect on SA, and positive values contribute to SA. Results of this survey are shown in Table 7.

**Table 7: SA Survey Results**

| Questions/Tasks                                           | Cruise  |         | Formation Airdrop |         | Max Effort Airland |         |
|-----------------------------------------------------------|---------|---------|-------------------|---------|--------------------|---------|
|                                                           | Average | Std Dev | Average           | Std Dev | Average            | Std Dev |
| 1. Reading instrument or gauge                            | 1.46    | 0.88    | 1.60              | 0.55    | 1.60               | 0.55    |
| 2. Reading MFD/moving map/digital display                 | 2.23    | 0.83    | 2.40              | 0.55    | 2.40               | 0.55    |
| 3. Viewing Head's Up Display (HUD)                        | 1.40    | 0.55    | 2.00              | 1.00    | 2.00               | 1.00    |
| 4. Looking out of window                                  | 1.77    | 1.09    | 2.00              | 0.71    | 2.00               | 0.71    |
| 5. Reading raw computer data                              | -0.31   | 1.18    | -0.40             | 1.34    | -0.40              | 1.34    |
| 6. Radar/sensor interpretation                            | 1.46    | 0.78    | 1.20              | 1.10    | 1.20               | 1.10    |
| 7. Keyboard/data entry                                    | -1.08   | 0.76    | -1.20             | 0.84    | -1.20              | 0.84    |
| 8. Writing (data cards, kneeboard, etc.)                  | -0.31   | 1.03    | -0.40             | 1.34    | -0.40              | 1.34    |
| 9. Reading charts, "sticks," approach plates              | 1.15    | 1.07    | 1.00              | 0.71    | 1.00               | 0.71    |
| 10. Manual computations (whiz wheel, TOLD, tab data, etc) | -1.08   | 1.38    | -1.20             | 1.30    | -1.20              | 1.30    |
| 11. Talking, simple (advisory calls, responses)           | 0.62    | 0.96    | -0.20             | 0.84    | -0.20              | 0.84    |
| 12. Talking, complex (briefings, radio calls, etc)        | 0.00    | 1.68    | -1.20             | 1.30    | -1.20              | 1.30    |
| 13. Listening, simple (alerts, advisory call)             | 1.23    | 0.73    | 0.40              | 0.89    | 0.40               | 0.89    |
| 14. Listening, complex (radio, crew feedback)             | 1.15    | 1.21    | 0.60              | 1.14    | 0.60               | 1.14    |
| 15. Background listening (monitoring RWR, radio)          | -0.15   | 1.14    | -0.60             | 1.14    | -0.60              | 1.14    |
| 16. Simple maneuvering (maintaining parameters)           | 0.15    | 0.80    | -0.60             | 0.55    | -0.60              | 0.55    |
| 17. Complex maneuvering (defensive reactions)             | -1.31   | 0.63    | -1.80             | 0.45    | -1.80              | 0.45    |
| 18. Simple button/switch actuation                        | -0.08   | 0.49    | -0.40             | 0.55    | -0.40              | 0.55    |
| 19. Cumbersome button/switch actuation                    | -1.00   | 1.08    | -1.80             | 0.84    | -1.80              | 0.84    |

It is important to note that survey participants were not explicitly briefed on the difference between tactical and strategic SA, however they were asked to disregard the effects of workload on their SA scores. In reporting SA scores, some participants provided negative SA scores, which we hypothesize represents an opportunity cost that most likely trades off tactical and strategic SA. Thus performing task A (tactical task) consumes attentional resources that may have been spent on a hypothetical task B (strategic task) that would have yielded more SA. In reality, a negative tactical SA score would imply that by accomplishing a task, false SA would be gained leading to an incorrect mental model. It is hypothesized that the participants were not suggesting that

any activities were actually contributing to incorrect mental models. These negative values are deliberately not incorporated into the tactical SA scoring because the opportunity costs are already accounted for by decrementing the operator's strategic SA score since those tasks are typically high-workload tasks. Furthermore, several tasks were coded in IMPRINT to pass an "(operator)\_busy" variable which would hold the release condition of other SA-gaining tasks (i.e. an Engineer doing performance calculations would not be monitoring systems).

The total SA score is the sum of a strategic SA value plus all of the tactical SA values at that given time. Using a total SA benchmark of 1.0, strategic SA has individual scores from 0.25-0.75. The Low SA task adds 0.25, Medium SA equals 0.5, and High SA equals 0.75. At the completion of each task, the increment assigned (0.25, 0.5, or 0.75) is de-incremented and the function repeats. Because multiple tasks can be performed simultaneously, the tactical SA scoring for individual elements are set lower than strategic SA to balance their effects on total SA. Thus, the highest individual tactical SA score was set equal to 0.25, which is also the lowest strategic SA score. Since decrementing strategic SA accounted for negative scores in the SA survey, the minimum reported tactical SA scores were rounded up to zero. All of the survey results were rounded to the nearest 0.5 and divided by 10 as shown in the adjustment table (Table 8), to achieve individual tactical SA values between 0 and 0.25.

**Table 8: IMPRINT Tactical SA Adjustments to SA Survey Results**

| <b>Raw Average</b>   | <b>Tactical SA</b> |
|----------------------|--------------------|
| if Avg < .25         | 0.00               |
| if .25 < Avg < .75   | 0.05               |
| if .75 < Avg < 1.25  | 0.10               |
| if 1.25 < Avg < 1.75 | 0.15               |
| if 1.75 < Avg < 2.25 | 0.20               |
| if 2.25 < Avg        | 0.25               |

Applying these scores to the generalized list of 19 tasks allows the assignment of tactical SA values to be used in IMPRINT (Table 9). Some tasks, such as viewing the HUD and looking out of the window, yielded lower values for cruise flight than for the tactical events. Thus, a lower tactical SA value is programmed into IMPRINT when the aircraft is at cruise altitude and a higher tactical SA value when the aircraft is at low altitude or executing tactical events. For an exhaustive list of tactical SA scores assigned to all tasks in each scenario, consult Appendix D: Task Listings and Tactical SA Assignments.

**Table 9: IMPRINT Tactical SA Values**

| Questions/Tasks                                           | Tactical SA Score |
|-----------------------------------------------------------|-------------------|
| 1. Reading instrument or gauge                            | 0.15              |
| 2. Reading MFD/moving map/digital display                 | 0.25              |
| 3. Viewing Head's Up Display (HUD)                        | .15/.2*           |
| 4. Looking out of window                                  | .15/.2*           |
| 5. Reading raw computer data                              | 0                 |
| 6. Radar/sensor interpretation                            | 0.15              |
| 7. Keyboard/data entry                                    | 0                 |
| 8. Writing (data cards, kneeboard, etc.)                  | 0                 |
| 9. Reading charts, "sticks," approach plates              | 0.1               |
| 10. Manual computations (whiz wheel, TOLD, tab data, etc) | 0                 |
| 11. Talking, simple (advisory calls, responses)           | 0                 |
| 12. Talking, complex (briefings, radio calls, etc)        | 0                 |
| 13. Listening, simple (alerts, advisory call)             | 0.05              |
| 14. Listening, complex (radio, crew feedback)             | 0.05              |
| 15. Background listening (monitoring RWR, radio)          | 0                 |
| 16. Simple maneuvering (maintaining parameters)           | 0                 |
| 17. Complex maneuvering (defensive reactions)             | 0                 |
| 18. Simple button/switch actuation                        | 0                 |
| 19. Cumbersome button/switch actuation                    | 0                 |

\*First value indicates cruise altitude and second value indicates tactical events


By combining the strategic and tactical SA scores, a total SA score for each operator is calculated. The time-distributed value of each operator's SA shows how operator SA changes throughout the scenario in much the same way as the workload distribution described earlier. It is important to note that the SA scores reflect only the potential for Level 1 SA. It is up to the reader to make implications on the effects of higher SA levels, since there is no method to predict comprehension ability through IMPRINT.

Comparing Total SA between aircrews as a whole poses some problems. While individuals maintain SA in their own right, how do we measure the collective SA for the aircrew as a whole? As discussed in the Chapter 2, Team SA is a product of the overlapping SA between individuals. This requires a degree of communication, but also

is affected by each operator's priorities. If all members possess the same information, then there is no net gain in SA. Team SA is not simply the sum of individual SA.

If one were to simply average individual SA scores, then the operator with lower SA would drag down the team score. This does not fully describe the advantage of working in a team setting: specialization and redundancy allows individuals to put together different pieces of information together to form a better mental model. The adage, "one of us is not as smart as all of us," captures this concept. While Team SA may not be perfectly synergistic, perhaps the advantage in team settings is that one person can fill gaps in SA left by other operators. That is, the team SA at any given point in time is not the sum of individual SA scores, nor is it the average of the individuals, but the value of the individual who has the highest SA at that given moment in time. Therefore the individual contributing most towards team SA changes as the situation evolves. This captures the dynamic nature of SA in team settings, but only the *potential* for team SA. Clearly, if the individual with the highest SA withholds that information from the team, then that benefit is lost.

Figure 14 illustrates this team SA concept versus taking an average of individual SA scores. With three hypothetical operators (A, B, and C), the team's average SA would always be lower than someone's individual Total SA. However, when the Team SA function (heavy black line) uses the highest individual Total SA score at each given moment in time, then different members of that team are contributing towards Team SA.

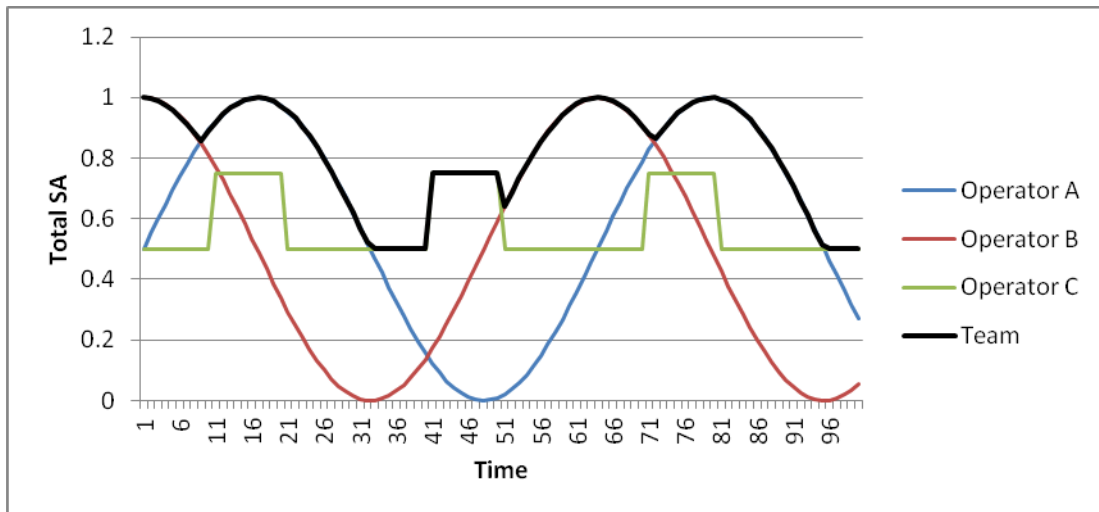

**Figure 14: Team SA Example**

However, even this method of measuring Team SA is not without drawbacks. Since it only considers the total SA value of the individual with the highest total SA at that instant in time, it discounts the contributions of every other member in that team with lower SA. This ignores contributions and gaps in SA filled by the rest of the team and the complex interaction between team members. By not factoring in the required communication (or lack thereof) between team member, the team SA formula ignores the possibility that an individual with lower SA might make a crucial contribution towards the team as a whole. While not ideal, measuring SA for the group is still a relevant and important metric to capture the effects of removing humans from the cockpit.

#### **Phase IV: Analyze Results**

First, one trial run for each of the 4 conditions (C-130H Formation Airdrop, C-130J Formation Airdrop, C-130H Airland, and C-130J Airland) is run. A detailed IMPRINT output allows for careful study of the characteristics for each simulation. The single-iteration output provides graphical identification and qualitative determination of



where significant workload peaks occur that can be quantitatively described. IMPRINT easily outputs large data files of time-based workload values. By running 14 iterations of the model through pair wise *t*-tests and examining the comparing the family-wise error rate to a Bonferroni post hoc test, a comparison of the data and it's statistical significance can be made. These two methods will answer investigative questions #1 and 3: how automation affects workload during SKE formation airdrop and an airland mission. Similarly, charting the time-based distribution of the situation awareness variables, another single iteration qualitative analysis of SA can be made. Measuring total SA over multiple iterations and interpreting through another *t*-test and Bonferroni test answers questions #2 and 4: how automation affects SA during SKE formation airdrop and an airland mission.

## **Summary**

This research employs IMPRINT, a discrete-event simulation human performance modeling tool, to calculate a time-based distribution of workload. Workload distributions are calculated by creating task networks from operating procedures for each aircraft according to SKE formation airdrop and maximum-effort airland scenarios. By creating scenarios for each aircraft, the differences in cockpit configuration (automation, switches, displays, and crew compliment) and scenario events serve as independent variables to show differences in workload. IMPRINT generates the workload profile, which allows the experimenter to observe and measure the timing and duration of workload peaks, which answers the first investigative question. The author has created a situation awareness function to measure workload-dependent degradation of strategic SA under

high workload conditions. When combined with task-specific SA contributions, a total score for potential SA is computed, thus answering the second investigative question regarding the impact of automation on SA.

This experiment distinguishes itself because it focuses heavily on using checklists and operational procedures of the C-130 instead of higher-level observations of C-130 operational practices. It seeks to model the cockpit task network on a very fine level of detail. Predictive methods of determining SA are nascent. By developing a novel method of establishing a generic strategic SA component, which is dependent on experienced workload, and combining that with task-specific “tactical” SA elements, this research seeks to establish an SA measurement that could potentially be evaluated later with other methods such as SAGAT. Finally, the author proposes one method to estimate potential team SA.

## **IV. Analysis and Results**

### **Chapter Overview**

Two scenarios were modeled in IMPRINT: SKE Formation Airdrop and Maximum Effort Airland. For each scenario, IMPRINT models representing both the automated system (C-130J) and non-automated system (C-130H) were run to output workload and situation awareness profiles. Inspecting the results of a single iteration leads to qualitative analysis of overall trend and a more focused analysis of identified workload peaks. Collecting data from multiple iterations and using pair-wise *t*-tests identified the quantitative difference between the C-130H and C-130J. Finally, this analysis is compared to the test hypotheses outlined in Chapter I to answer the original investigative questions.


### **Results of Simulation Scenarios**

#### ***Workload Analysis***

##### **SKE Formation Airdrop Scenario**

Each scenario was run for a single iteration in order to obtain a detailed, continuous IMPRINT workload profile. This is used as the basis for the qualitative analysis. For the C-130H SKE Formation Airdrop Scenario, a level sine wave develops and remains centered on approximately 20 workload units throughout the duration of the workload run (Figure 15). The Engineer's workload sine amplitude of about 3-4 units (centered on 21 units), while the Pilot and Navigator experience the largest sine

amplitude of about 10 units (centered on 19 units). While the workload sine wave remains remarkably consistent, several peaks stand out as significant.

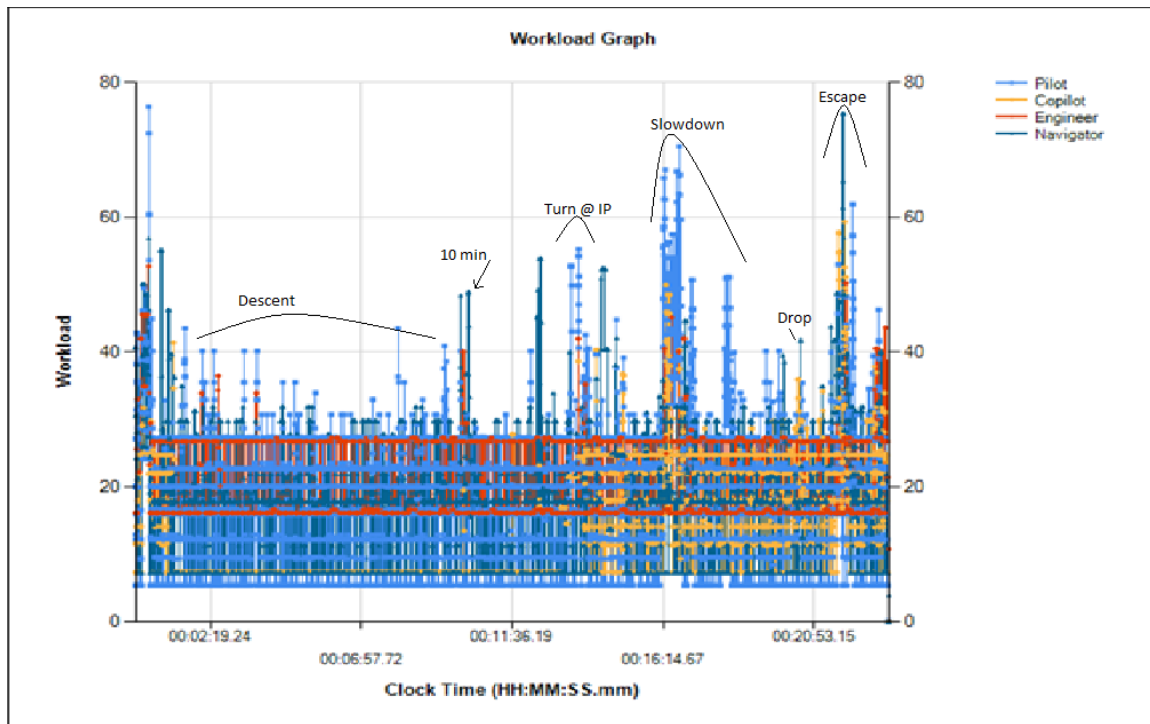

**Figure 15: C-130H, SKE Formation Airdrop scenario Workload Distribution**

To take a qualitative look at those peaks, all workload values below 40 were omitted and all workload values above 40 were grouped together in similar time brackets (Table 10). Generally, any gap exceeding 30 seconds between any two high workload values was considered as separate peaks. After this grouping, the peak start time (defined as the time where workload exceeded 40 units) and duration (time elapsed from start until workload is less than 40) are identified and compared with corresponding tasks in the Operator Workload Detail output from the IMPRINT simulation run. Note that some of the durations are less than one second, which represents a random instantaneous spike in operator workload.

**Table 10: SKE Formation Airdrop Workload Peaks (C-130H)**

|                  | <b>Start Time</b><br><b>(hh:mm:ss)</b> | <b>Duration</b><br><b>(hh:mm:ss.ss)</b> | <b>Max</b><br><b>Workload</b> | <b>Phase of Mission</b> |
|------------------|----------------------------------------|-----------------------------------------|-------------------------------|-------------------------|
| <b>Pilot</b>     | 00:00:02.42                            | 00:00:27.95                             | 76.4                          | Preslowdown             |
|                  | 00:01:31.65                            | 0                                       | 43.50                         | Formation Descent       |
|                  | 00:02:03.63                            | 00:00:21.48                             | 40.10                         | Basic Aircraft Control  |
|                  | 00:08:04.90                            | 0                                       | 43.5                          | Basic Aircraft Control  |
|                  | 00:09:31.02                            | 00:00:30.01                             | 40.9                          | Formation Descent       |
|                  | 00:12:10.59                            | 0                                       | 40.1                          | Basic Aircraft Control  |
|                  | 00:13:24.55                            | 00:00:32.20                             | 55.2                          | Formation Turn at IP    |
|                  | 00:14:48.43                            | 0                                       | 44.8                          | IP to DZ Run In         |
|                  | 00:16:14.39                            | 00:02:03.81                             | 70.5                          | Slowdown                |
|                  | 00:19:24.88                            | 00:00:23.85                             | 40.1                          | Release Point           |
|                  | 00:21:38.60                            | 00:01:14.54                             | 61.9                          | DZ Escape               |
| <b>Copilot</b>   | 00:01:09.93                            | 00:00:00.07                             | 41.4                          | Preslowdown             |
|                  | 00:14:10.85                            | 0                                       | 40.3                          | Basic Aircraft Control  |
|                  | 00:16:19.24                            | 00:00:25.39                             | 49.9                          | Slowdown                |
|                  | 00:21:38.99                            | 00:00:13.53                             | 59.3                          | DZ Escape               |
| <b>Navigator</b> | 00:00:00.00                            | 00:01:00.52                             | 56.9                          | Preslowdown             |
|                  | 00:10:00.71                            | 00:00:15.07                             | 48.9                          | Preslowdown             |
|                  | 00:12:21.41                            | 00:00:08.59                             | 53.9                          | Formation Turn at IP    |
|                  | 00:14:19.80                            | 00:00:28.63                             | 52.3                          | IP to DZ Run In         |
|                  | 00:16:54.30                            | 00:00:01.33                             | 44.7                          | IP to DZ Run In         |
|                  | 00:20:28.67                            | 0                                       | 41.8                          | Release Point           |
|                  | 00:21:24.42                            | 00:00:24.11                             | 75.4                          | Release Point           |
| <b>Engineer</b>  | 00:00:08.46                            | 00:00:15.45                             | 52.7                          | Preslowdown             |
|                  | 00:13:37.93                            | 00:00:00.61                             | 42                            | Preslowdown             |
|                  | 00:16:16.72                            | 00:00:35.39                             | 45.1                          | Slowdown                |
|                  | 00:21:51.29                            | 00:01:13.71                             | 50.2                          | Escape                  |

Since there was no workload strategy employed during this simulation run, workload was allowed to exceed the IMPRINT default overload threshold of 60 units. All tasks, therefore, were initiated on-time (as soon as release conditions were met). A recurring trend in for each workload peak were common parallel tasks such as: scanning for threats, listening to radios, monitoring aircraft, and flying (Pilot only) tasks. It would be logical to assume that some of these tasks would be prioritized (i.e. flying) and others

suspended based on evolving prioritization (i.e. not scanning for threats when running checklists or at higher altitudes).

Not surprisingly, the Pilot had both the most workload peaks (11 total, 4 of which were momentary spikes), and the highest instantaneous workload value (76.4 units) among the crew. Because the Pilot must manually fly the aircraft, maintain a formation position, and pass commands via the push-button Flight Command Indicator (FCI), workload can elevate easily when other tasks are introduced. Indeed, even the Basic Aircraft Control function occasionally spiked above 40 units when the Pilot mentally evaluated his performance while conducting other parallel tasks. Several significant peaks stand out:

- The highest workload value (76.4) occurred during a 27 second peak at the beginning of the scenario when calling for the Pre-slowdown checklist and executing the checklist while flying at enroute altitude.
- While executing the SKE formation turn and leveling off from the first descent, there are 30-32 second peaks with workload values of 41 and 55. This is due to tasks associated with talking on the radio, sending commands, and increased effort to monitor and evaluate the formation turn.
- The slowdown-drop zone-escape sequence resulted in several long workload peaks (24 seconds to over 2 minutes) in succession with high maximum values (70.5 for slowdown, 40.1 for the drop zone, and 61.9 for the escape maneuver). This sequence best captures the demands of flying the SKE formation airdrop since the Pilot assumes control for FCI commands from slowdown until escape, while making large airspeed changes, configuring the


aircraft, executing checklists, and flying to tighter positional tolerances as the aircraft nears the release point.

The Navigator was the second-busiest operator on the aircrew with 7 workload peaks above 40 units (2 momentary spikes). Surprisingly, approaching the release point, the Navigator only had one momentary workload spike when evaluating drop parameters. The Navigator's two busiest times occurred at the beginning of the simulation (1 minute long, peak of 56.9) while writing data on the drop briefing card, briefing the airdrop and accomplishing the Pre-slowdown checklist, and also completing the drop (24 seconds long, 75.4 maximum workload), directing the escape maneuver and responding to the Completion of Drop checklist. Other notable peaks include the formation turn at the Initial Point (IP) which lasted 9 seconds and peaked at 53.9, and updating computer drop information in the Self Contained Navigation System (SCNS) which lasted 58 seconds and peaked at 52.3. During this run only Navigator and the Pilot experienced overload conditions.

The Copilot and Engineer were considerably less busy. Both experienced four peaks (two and one momentary spikes, respectively). The Copilot's workload peaks occurred while responding to the Slowdown checklist and extending flaps (25 seconds, 49.9 maximum) and again during the escape maneuver while reconfiguring the SKE secondary control panel and responding to the Completion of Drop checklist (13.5 seconds, 59.3 maximum). The Engineer's workload peaks correlated directly with running the Pre-slowdown (15 seconds, 52.7 maximum), Slowdown (35 seconds, 45.1 maximum) and Completion of Drop checklists (1 minute 14 seconds, 50.2 maximum).

The C-130J iteration of the SKE Formation Airdrop scenario, with its improved automation, glass cockpit, head's-up display (HUD), and reduced crew compliment (the Navigator and Engineer have been replaced with automation), has the aircraft flying on autopilot and autothrottles until the aircraft was at drop altitude. Then, the Pilot maintained formation position until the escape maneuver was nearly completed, where the autopilot was re-engaged. Because the crew is much smaller, fewer advisory calls and intra-cockpit communication occurred. The C-130J SKE automatically relayed most FCI commands with little to no input from either Pilot or Copilot. Finally increased automation reduced the volume of checklist tasks to a handful of items, along with the associated call-and-response found heavily in the C-130H checklist. As a result, the C-130J exhibited a linear sine wave centered between approximately 17 and 18 units and amplitudes of around 4 units, both lower in average and amplitude than the C-130H (Figure 16).



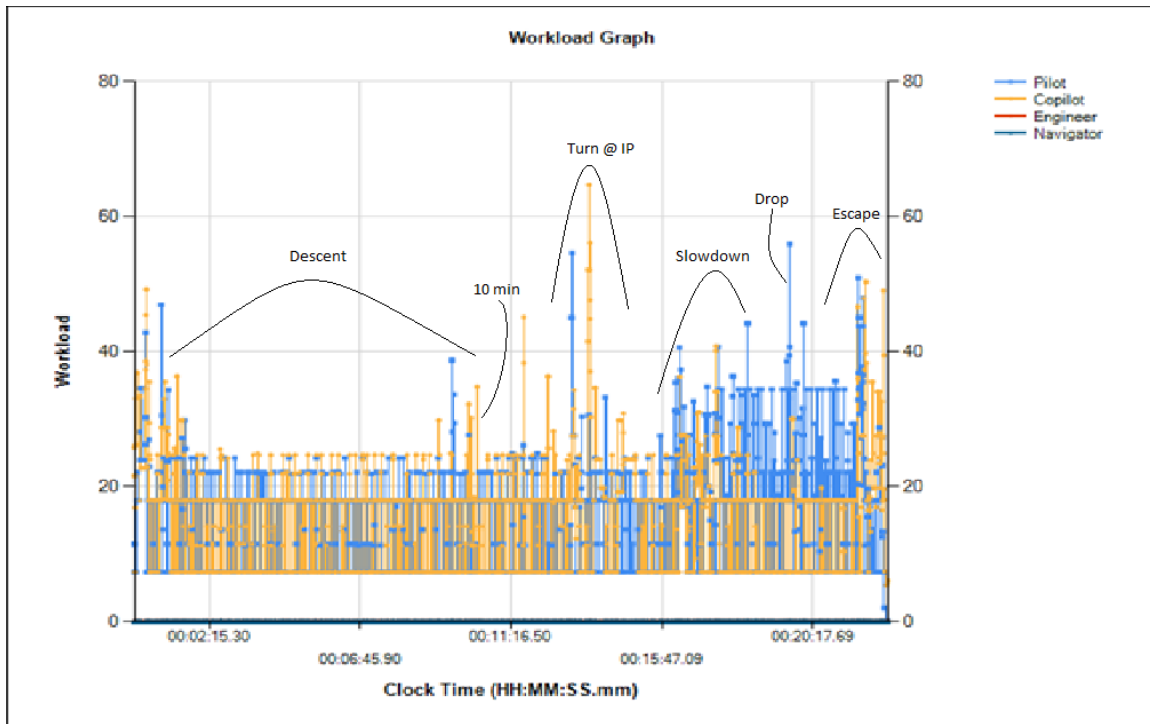

**Figure 16: C-130J SKE Formation Airdrop scenario Workload Distribution**

Viewing Figure 16, one can identify when the Pilot reverted to a lower level of automation (i.e. increased manual control) when the aircraft was established at drop altitude (approximately 00:17:00.00). While the sine wave is centered at a lower average than the C-130H model, a cutoff of 40 units is still useful to remain consistent with the C-130H analysis and to mitigate noise for the qualitative analysis (Table 11). Notably, the magnitude and quantity of workload peaks decreased from the C-130H simulation.

**Table 11: SKE Formation Airdrop scenario Workload Peaks (C-130J)**

|                | <b>Start Time<br/>(hh:mm:ss)</b> | <b>Duration<br/>(hh:mm:ss.ss)</b> | <b>Max<br/>Worload</b> | <b>Phase of Mission</b> |
|----------------|----------------------------------|-----------------------------------|------------------------|-------------------------|
| <b>Pilot</b>   | 00:00:20.16                      | 00:00:27.82                       | 46.9                   | Drop Preparation        |
|                | 00:13:04.85                      | 00:00:01.11                       | 54.6                   | Formation Turn at IP    |
|                | 00:16:18.56                      | 00:00:00.47                       | 40.6                   | Slowdown                |
|                | 00:17:28.27                      | 0                                 | 40.7                   | Slowdown                |
|                | 00:18:20.74                      | 0                                 | 44.1                   | Slowdown                |
|                | 00:19:36.71                      | 00:00:24.07                       | 55.9                   | Release Point           |
|                | 00:21:39.25                      | 00:00:09.62                       | 50.9                   | Escape                  |
| <b>Copilot</b> | 00:00:20.81                      | 00:00:00.58                       | 49.2                   | Drop Preparation        |
|                | 00:11:39.27                      | 0                                 | 45.1                   | Basic Aircraft Control  |
|                | 00:13:33.70                      | 00:00:04.32                       | 64.7                   | IP to DZ run in         |
|                | 00:17:23.86                      | 00:00:00.33                       | 40.8                   | Slowdown                |
|                | 00:21:38.32                      | 00:00:45.62                       | 50.3                   | Escape                  |

The Pilot experiences 7 workload peaks, of which only 3 are sustained much longer than one second (compared to the C-130H Pilot who had 11 peaks, of which 7 were sustained). These sustained peaks occurred while responding to the Drop Preparation (28 seconds, 46.9 maximum), executing the airdrop at the Release Point (24 seconds, 55.9 maximum) and Completion of Drop checklists (10 seconds, 50.9 maximum). Nearing the release point, the Pilot experienced a 24 second peak with a 55.9 unit maximum, which is of the same duration but higher than the C-130H Pilot's peak near the release point (24 seconds, 40.1 maximum). However, the C-130J Pilot does not experience the same degree of workload in the final minutes leading to the drop, nor the overload during the escape maneuver. Of note, the formation turn at the Initial Point (IP) spikes briefly, but at 54.6 units, is nearly of same intensity as the C-130H Pilot's workload during the formation turn (32 seconds, 55.2 maximum).

The C-130J Copilot, however, had somewhat similar workload peaks to his C-130H counterpart (5 peaks vs. 4 peaks, both with 2 sustained peaks). However the C-130J

Copilot only experienced sustained workload peaks while copying drop zone winds during the IP-inbound leg (4 seconds, 64.7 maximum) but was overloaded when attempting to listen, write, and perform Copilot duties. The other sustained peak occurred during the escape maneuver (46 seconds, 50.3 maximum) while listening and recording drop scores and executing the Completion of Drop checklist.

Summarizing the single-iteration analysis, the C-130J Pilot experiences a significant drop in quantity, magnitude, and duration of workload peaks, while the C-130J Copilot experiences a slight increase in quantity, magnitude and duration of experienced peaks (Table 12). When the Navigator and Engineer are averaged in, the C-130J crew experiences a slight reduction in quantity and magnitude but a noticeable decrease in duration when high workload is encountered.

**Table 12: Summary of Workload Peaks, SKE Formation Airdrop scenario**

|                  | <b># of Peaks</b> | <b>Total Duration</b> | <b>Avg Duration</b> | <b>Avg Workload</b> | <b>Max Workload</b> |
|------------------|-------------------|-----------------------|---------------------|---------------------|---------------------|
| <b>H Pilot</b>   | 11                | 05:33.8               | 00:30.3             | 48.47               | 76.4                |
| <b>H Copilot</b> | 4                 | 00:39.0               | 00:09.7             | 47.13               | 59.3                |
| <b>H Aircrew</b> | 6.5               | 02:39.1               | 00:24.5             | 47.91               | 50.45               |
| <b>J Pilot</b>   | 7                 | 01:03.1               | 00:09.0             | 45.73               | 55.9                |
| <b>J Copilot</b> | 5                 | 00:50.8               | 00:10.2             | 48.52               | 64.7                |
| <b>J Aircrew</b> | 6                 | 00:57.0               | 00:09.5             | 47.12               | 48.65               |

After running 14 iterations of the SKE Formation Airdrop scenario, statistical analysis can determine which aircrew sustains higher average levels of workload (Table 13) and higher maximum workload (Table 14).

**Table 13: SKE Formation Airdrop Average Workloads**

| Iteration       | C-130H Average Workloads |              |              |              |              | C-130J Average Workloads |              |              |
|-----------------|--------------------------|--------------|--------------|--------------|--------------|--------------------------|--------------|--------------|
|                 | H Navigator              | H Engineer   | H Pilot      | H Copilot    | H Aircrew    | J Pilot                  | J Copilot    | J Aircrew    |
| 1               | 19.19                    | 22.97        | 19.02        | 17.95        | 19.78        | 17.17                    | 17.93        | 17.55        |
| 2               | 19.92                    | 22.89        | 19.32        | 18.44        | 20.14        | 17.10                    | 17.51        | 17.30        |
| 3               | 18.96                    | 22.74        | 19.32        | 18.22        | 19.81        | 17.55                    | 17.10        | 17.33        |
| 4               | 20.03                    | 23.02        | 19.06        | 18.29        | 20.10        | 17.24                    | 17.09        | 17.17        |
| 5               | 19.16                    | 22.59        | 18.98        | 18.06        | 19.70        | 17.36                    | 17.68        | 17.52        |
| 6               | 19.80                    | 22.96        | 19.28        | 18.30        | 20.09        | 17.26                    | 17.21        | 17.23        |
| 7               | 19.62                    | 23.13        | 19.14        | 18.21        | 20.03        | 16.90                    | 17.60        | 17.25        |
| 8               | 19.35                    | 23.07        | 19.02        | 18.72        | 20.04        | 17.35                    | 17.43        | 17.39        |
| 9               | 19.81                    | 23.09        | 19.23        | 18.17        | 20.08        | 17.57                    | 16.91        | 17.24        |
| 10              | 19.50                    | 23.18        | 19.54        | 18.18        | 20.10        | 17.26                    | 17.11        | 17.18        |
| 11              | 18.81                    | 22.75        | 19.00        | 18.24        | 19.70        | 17.43                    | 16.61        | 17.02        |
| 12              | 19.15                    | 22.96        | 19.29        | 18.37        | 19.94        | 17.26                    | 17.09        | 17.17        |
| 13              | 18.87                    | 23.03        | 19.30        | 18.51        | 19.93        | 17.00                    | 17.85        | 17.42        |
| 14              | 18.79                    | 22.85        | 19.15        | 18.25        | 19.76        | 17.44                    | 16.78        | 17.11        |
| <b>Averages</b> | <b>19.35</b>             | <b>22.95</b> | <b>19.19</b> | <b>18.28</b> | <b>19.94</b> | <b>17.28</b>             | <b>17.28</b> | <b>17.28</b> |

**Table 14: SKE Formation Airdrop Maximum Workloads**

| Iteration       | C-130H Maximum Workloads |              |              |              |              | C-130J Maximum Workloads |              |              |
|-----------------|--------------------------|--------------|--------------|--------------|--------------|--------------------------|--------------|--------------|
|                 | H Navigator              | H Engineer   | H Pilot      | H Copilot    | H Aircrew    | J Pilot                  | J Copilot    | J Aircrew    |
| 1               | 67.80                    | 49.70        | 89.50        | 57.80        | 66.20        | 59.90                    | 64.70        | 41.53        |
| 2               | 70.90                    | 49.70        | 83.80        | 68.30        | 68.18        | 57.60                    | 64.70        | 40.77        |
| 3               | 69.70                    | 45.80        | 83.80        | 57.70        | 64.25        | 54.80                    | 67.90        | 40.90        |
| 4               | 83.90                    | 49.70        | 70.50        | 59.30        | 65.85        | 54.60                    | 64.70        | 39.77        |
| 5               | 67.70                    | 45.50        | 79.2         | 68.30        | 65.18        | 58.60                    | 64.70        | 41.10        |
| 6               | 76.70                    | 49.70        | 79.20        | 57.50        | 65.78        | 54.60                    | 64.70        | 39.77        |
| 7               | 68.80                    | 49.70        | 77.50        | 68.30        | 66.08        | 54.60                    | 64.70        | 39.77        |
| 8               | 75.50                    | 49.70        | 81.30        | 75.10        | 70.40        | 54.80                    | 58.10        | 37.63        |
| 9               | 77.60                    | 49.70        | 81.30        | 57.70        | 66.58        | 61.60                    | 54.10        | 38.57        |
| 10              | 79.10                    | 49.70        | 81.30        | 75.10        | 71.30        | 54.80                    | 55.50        | 36.77        |
| 11              | 77.60                    | 49.70        | 79.60        | 61.50        | 67.10        | 58.80                    | 64.70        | 41.17        |
| 12              | 67.00                    | 53.10        | 79.60        | 57.50        | 64.30        | 54.60                    | 64.70        | 39.77        |
| 13              | 72.00                    | 53.10        | 79.20        | 59.30        | 65.90        | 53.40                    | 64.70        | 39.37        |
| 14              | 77.60                    | 50.20        | 72.40        | 57.70        | 64.48        | 53.40                    | 64.70        | 39.37        |
| <b>Averages</b> | <b>73.71</b>             | <b>49.64</b> | <b>79.87</b> | <b>62.94</b> | <b>66.54</b> | <b>56.15</b>             | <b>63.04</b> | <b>39.73</b> |

Conducting a *t*-test of these data shows that there exists a statistically significant difference within a 95% confidence interval ( $\alpha = 0.05$ ) between the C-130H and C-130J


for average workloads. Data that satisfies the *t*-test also meets the stricter significance criteria of the Bonferroni post hoc test to account for the family-wise error rate ( $m = 3$ ,  $\alpha_{\text{Bonferroni}} = 0.017$ ). Examining the difference in averages from Table 13, the C-130J clearly has lower average workload for the Pilot, Copilot and aircrew as a whole (includes Navigator and Engineer) while performing SKE Formation Airdrop. Examining the maximum workload values, the C-130J Pilot and aircrew sustain lower maximum workload than the C-130H, but there is no statistically significant difference between the Copilots. Thus, while average workload results are clear, the maximum workload results for SKE formation airdrop are mixed, but increased automation does not do worse in this scenario.

**Table 15: T-test results for SKE Formation Airdrop Workload data**

|                 | Average Workload |         |         | Maximum Workload |         |         |
|-----------------|------------------|---------|---------|------------------|---------|---------|
| $\alpha=0.05$   | Pilot            | Copilot | Aircrew | Pilot            | Copilot | Aircrew |
| <i>p</i> -value | <0.001           | <0.001  | <0.001  | <0.001           | 0.966   | <0.001  |
| Lower Workload  | J                | J       | J       | J                | Neither | J       |

#### Maximum Effort Airland Scenario

Similar to SKE Formation Airdrop, the first iteration of the Maximum Effort Airland scenario was run for a single iteration with the detailed IMPRINT output for a qualitative analysis. While the SKE Formation airdrop workload approximated a linear sine wave, the Airland scenario data in Figure 17 more closely resembles a bell curve with considerable oscillation superimposed on it. All C-130H operators peaks during the slowdown and final approach phase and diminish rapidly after touchdown and during the cargo offload.

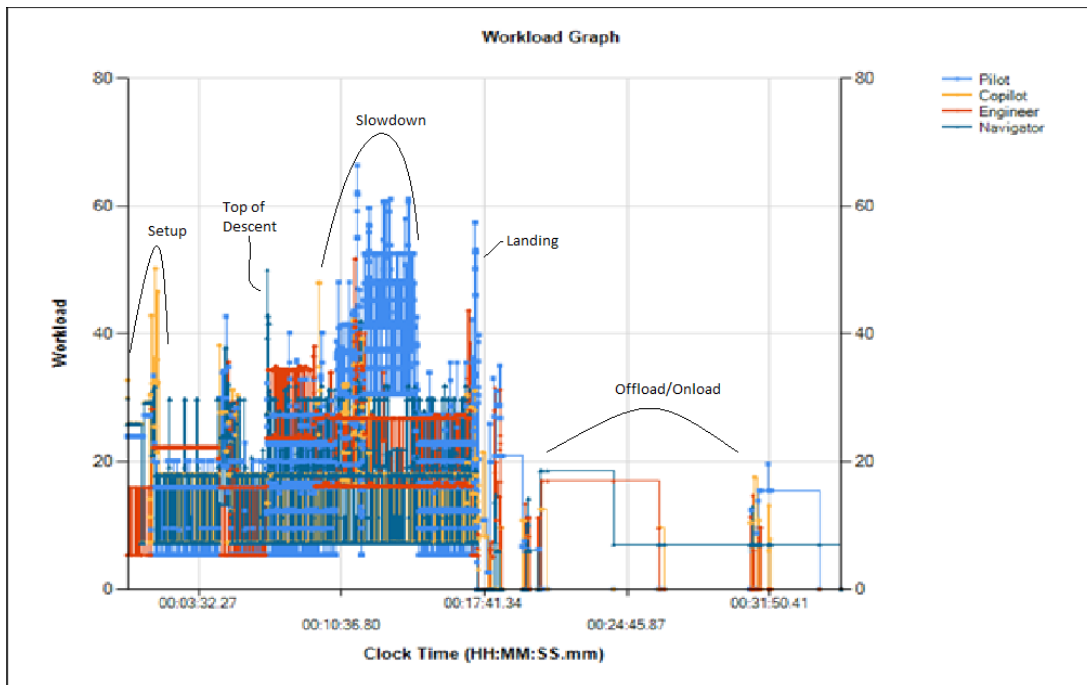

**Figure 17: C-130H Maximum Effort Airland Workload Distribution**


Again a workload of 40 units was used as a cutoff to qualitatively evaluate workload peaks (Table 16). This scenario generated far fewer workload peaks than the SKE Formation Airdrop Scenario. The C-130H Pilot encountered two sustained peaks: the first one occurring during level off and slowdown from high speed to final approach speed (3 minutes 53 seconds in duration, 66.4 maximum) and again while in the landing flare (10 seconds, 57.4 maximum). The C-130H Copilot encountered three workload peaks, of which the only sustained workload peak (20 seconds, 50.2 maximum) occurred early in the scenario while the Copilot was coordinating with air traffic control (ATC) on the radio, copying weather information, and scanning for threats. The other brief spikes were associated with configuring the landing gear and searching/identifying the landing runway. The Navigator only encountered one sustained peak (4 seconds, 50.0

maximum). Finally, the Engineer had two momentary spikes (<2 seconds) both associated with running checklists while monitoring aircraft performance.

**Table 16: Maximum Effort Airland Workload Peaks (C-130H)**

|                | <b>Start Time</b><br><b>(hh:mm:ss)</b> | <b>Duration</b><br><b>(hh:mm:ss.ss)</b> | <b>Max</b><br><b>Worload</b> | <b>Phase of Mission</b> |
|----------------|----------------------------------------|-----------------------------------------|------------------------------|-------------------------|
| <b>Pilot</b>   | 00:10:28.37                            | 00:03:52.89                             | 66.40                        | Slowdown                |
|                | 00:17:06.74                            | 00:00:09.69                             | 57.40                        | Landing                 |
| <b>Copilot</b> | 00:01:09.85                            | 00:00:20.15                             | 50.20                        | Enroute                 |
|                | 00:09:28.84                            | 00:00:01.16                             | 48.00                        | Descent                 |
|                | 00:11:12.35                            | 0                                       | 42.10                        | Slowdown                |
| <b>Nav.</b>    | 00:06:55.80                            | 00:00:04.20                             | 50.00                        | Descent                 |
|                | 00:11:33.22                            | 0                                       | 42.00                        | Slowdown                |
| <b>Eng.</b>    | 00:11:15.79                            | 00:00:01.79                             | 51.70                        | Slowdown                |
|                | 00:16:54.22                            | 00:00:00.78                             | 43.60                        | Before Landing          |

Inspecting the workload profiles for the C-130J (Figure 18), the same oscillating bell curve appears, albeit at higher workload levels. Noticeably, the C-130J Copilot overloads very early in the scenario, while the Pilot overloads twice during slowdown and configuration.

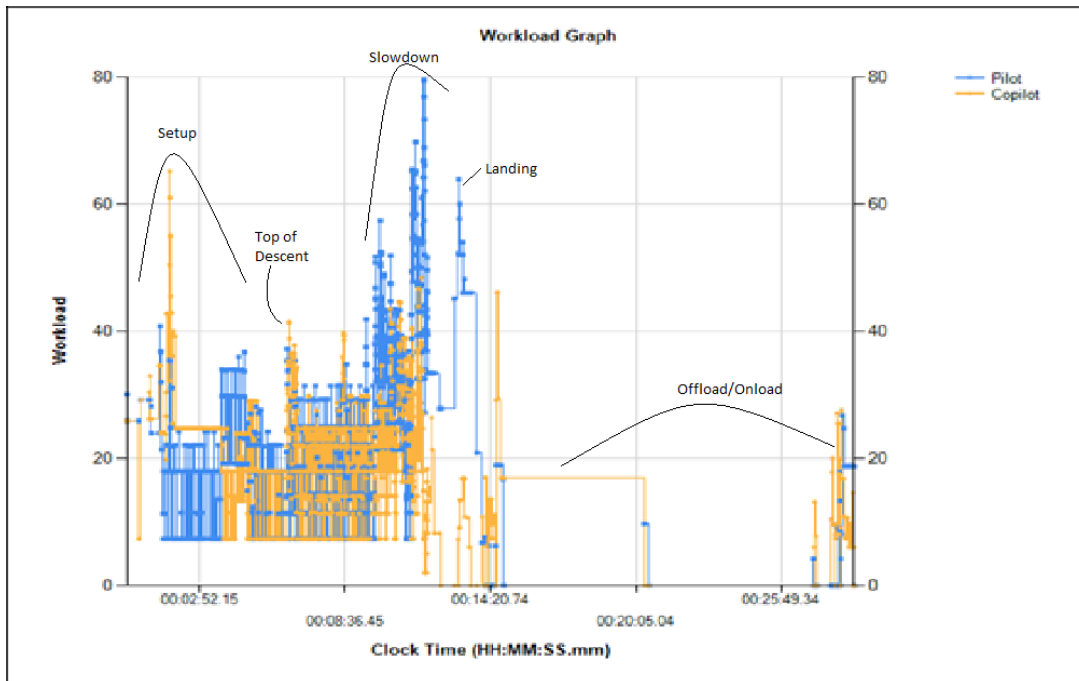

**Figure 18: C-130J Maximum Effort Airland Workload Distribution**

Table 17 shows that the C-130J Pilot encounters three workload peaks. Of the two sustained peaks, the first one (2 minutes 25 seconds, 79.5 maximum) occurs during the level off and slowdown. Compared to the C-130H Pilot during slowdown and configuration, the C-130J Pilot experienced a higher peak (79.5 versus 66.4) but high workload occurred in a shorter duration (2:25 versus 3:53). The second workload peak (50 seconds, 63.9 maximum) occurred just prior to and during landing, which was of longer duration and higher peak workload than the C-130H Pilot (10 seconds, 57.4 maximum).



**Table 17: Maximum Effort Airland Workload Peaks (C-130J)**

|                | <b>Start Time</b><br><b>(hh:mm:ss)</b> | <b>Duration</b><br><b>(hh:mm:ss)</b> | <b>Max</b><br><b>Worload</b> | <b>Phase of</b><br><b>Mission</b> |
|----------------|----------------------------------------|--------------------------------------|------------------------------|-----------------------------------|
| <b>Pilot</b>   | 00:01:18.91                            | 0                                    | 40.80                        | Enroute                           |
|                | 00:09:26.25                            | 00:02:24.50                          | 79.50                        | Slowdown                          |
|                | 00:12:54.82                            | 00:00:50.18                          | 63.90                        | Landing                           |
| <b>Copilot</b> | 00:01:33.86                            | 00:00:11.14                          | 65.20                        | Enroute                           |
|                | 00:06:23.62                            | 0                                    | 41.40                        | Descent                           |
|                | 00:10:23.25                            | 00:01:13.58                          | 48.40                        | Slowdown                          |

The C-130J Copilot also observed three workload peaks, of which two were sustained. At the beginning of the scenario, the Copilot becomes overloaded while communicating with ATC, copying weather, monitoring aircraft performance and scanning for threats. This first peak was shorter (11 versus 20 seconds) than the C-130H Copilot's peak, but resulted in a higher maximum workload value (65.2 versus 50.2) for the C-130J Copilot.

Summarizing the peak workload measurements in Table 18: the C-130J Pilot experiences only one more workload peak than the C-130H Pilot, while the Copilot experienced the same number of peaks. But, while the C-130J Pilot spends less time under high-workload conditions, the magnitude of those peaks were consistently greater than the C-130H Pilot's peaks. Thus, neither pilot held a conclusive advantage over the other. On the other hand, the C-130H Copilot had significantly shorter workload peaks with lower magnitudes, whereas the C-130J Copilot experienced overload. When the Navigator and Engineer are averaged into the Team SA, the C-130H aircrew experienced slightly fewer peaks, but spent noticeably less time operating in high workload and with a lower overall magnitude.

**Table 18: Workload Peak Summary, Maximum Effort Airland**

|               | # of Peaks | Total Duration | Avg Duration | Avg Workload | Max Workload |
|---------------|------------|----------------|--------------|--------------|--------------|
| H Pilot       | 2          | 04:02.6        | 02:01.3      | 46.62        | 66.40        |
| H Copilot     | 3          | 00:21.3        | 00:07.1      | 45.86        | 50.20        |
| H Aircrew Avg | 2.25       | 01:07.7        | 00:30.1      | 46.51        | 50.16        |
| J Pilot       | 3          | 03:14.7        | 01:04.9      | 51.40        | 79.50        |
| J Copilot     | 3          | 01:24.7        | 00:28.2      | 47.29        | 65.20        |
| J Aircrew Avg | 3          | 02:19.7        | 00:45.6      | 50.86        | 56.53        |

Just as in SKE Formation Airdrop scenario, 14 iterations of both the C-130H and C-130J Maximum Effort Airland models were run. Both average workload and maximum workload datasets were compiled as shown in Table 19 and Table 20.

**Table 19: Maximum Effort Airland Average Workload Values**

| Iteration | C-130H Average Workloads |            |         |           |           | C-130J Average Workloads |           |           |
|-----------|--------------------------|------------|---------|-----------|-----------|--------------------------|-----------|-----------|
|           | H Navigator              | H Engineer | H Pilot | H Copilot | H Aircrew | J Pilot                  | J Copilot | J Aircrew |
| 1         | 15.87                    | 21.03      | 21.55   | 12.93     | 17.84     | 22.09                    | 18.85     | 20.47     |
| 2         | 15.87                    | 20.28      | 21.75   | 12.60     | 17.62     | 21.81                    | 18.78     | 20.29     |
| 3         | 15.18                    | 19.85      | 21.73   | 12.17     | 17.23     | 21.77                    | 17.68     | 19.72     |
| 4         | 14.73                    | 18.84      | 20.86   | 11.62     | 16.51     | 22.26                    | 18.23     | 20.25     |
| 5         | 15.19                    | 20.37      | 22.05   | 11.71     | 17.33     | 22.41                    | 19.79     | 21.10     |
| 6         | 14.23                    | 19.45      | 21.55   | 11.85     | 16.77     | 22.47                    | 18.58     | 20.52     |
| 7         | 14.66                    | 20.14      | 21.59   | 12.19     | 17.15     | 21.81                    | 18.50     | 20.16     |
| 8         | 15.37                    | 20.95      | 22.30   | 12.45     | 17.77     | 21.85                    | 19.01     | 20.43     |
| 9         | 15.00                    | 18.97      | 21.75   | 11.72     | 16.86     | 21.04                    | 16.95     | 18.99     |
| 10        | 14.26                    | 18.95      | 21.34   | 11.00     | 16.39     | 21.80                    | 18.34     | 20.07     |
| 11        | 14.33                    | 19.31      | 21.35   | 11.25     | 16.56     | 21.76                    | 18.04     | 19.90     |
| 12        | 14.71                    | 18.38      | 21.23   | 11.48     | 16.45     | 21.05                    | 17.14     | 19.09     |
| 13        | 14.90                    | 19.72      | 21.75   | 12.05     | 17.07     | 21.91                    | 18.41     | 20.09     |
| 14        | 14.59                    | 20.27      | 21.95   | 12.57     | 17.34     | 21.69                    | 18.90     | 20.29     |
| Averages  | 14.92                    | 19.75      | 21.62   | 11.97     | 17.06     | 21.84                    | 18.37     | 20.10     |

**Table 20: Maximum Workload Values, Maximum Effort Airland Scenario**

| Iteration | C-130H Maximum Workloads |            |         |           |           | C-130J Maximum Workloads |           |           |
|-----------|--------------------------|------------|---------|-----------|-----------|--------------------------|-----------|-----------|
|           | H Navigator              | H Engineer | H Pilot | H Copilot | H Aircrew | J Pilot                  | J Copilot | J Aircrew |
| 1         | 57.70                    | 51.70      | 65.30   | 56.90     | 57.90     | 80.30                    | 61.00     | 70.65     |
| 2         | 47.10                    | 51.70      | 65.30   | 50.20     | 53.58     | 75.80                    | 50.60     | 63.20     |
| 3         | 48.70                    | 51.70      | 65.30   | 50.20     | 53.98     | 86.30                    | 49.60     | 67.95     |
| 4         | 47.80                    | 41.10      | 65.30   | 50.20     | 51.10     | 71.60                    | 56.90     | 64.25     |
| 5         | 45.70                    | 51.70      | 65.30   | 50.20     | 53.23     | 89.20                    | 55.00     | 72.10     |
| 6         | 51.50                    | 51.70      | 65.30   | 60.70     | 57.30     | 82.40                    | 53.50     | 67.95     |
| 7         | 47.80                    | 51.70      | 65.30   | 56.90     | 55.43     | 77.90                    | 61.00     | 69.45     |
| 8         | 47.80                    | 47.60      | 66.40   | 50.20     | 53.00     | 71.20                    | 66.90     | 69.05     |
| 9         | 46.10                    | 51.70      | 60.70   | 56.90     | 53.85     | 79.50                    | 50.60     | 65.05     |
| 10        | 46.70                    | 51.70      | 66.20   | 50.20     | 53.70     | 76.40                    | 61.00     | 68.70     |
| 11        | 46.10                    | 52.20      | 64.30   | 50.50     | 53.28     | 75.30                    | 52.00     | 63.65     |
| 12        | 57.70                    | 43.60      | 65.30   | 56.90     | 55.88     | 75.80                    | 50.40     | 63.10     |
| 13        | 49.10                    | 51.70      | 65.30   | 50.20     | 54.08     | 77.90                    | 56.90     | 67.40     |
| 14        | 57.70                    | 51.70      | 64.30   | 61.10     | 58.70     | 71.20                    | 55.00     | 63.10     |
| Averages  | 49.82                    | 50.11      | 64.97   | 53.66     | 54.64     | 77.91                    | 55.74     | 66.83     |

Conducting t-test evaluation of these data, the results are mixed. Data that satisfies the *t*-test also meets the stricter significance criteria of the Bonferroni post hoc test to account for the family-wise error rate ( $m = 3$ ,  $\alpha_{\text{Bonferroni}} = 0.017$ ). The Pilot has an insignificant difference in average workloads while the Copilot has an insignificant difference in maximum observed workload. When factoring in the Navigator and Engineer, the C-130H team experiences lower average and maximum workload peaks than the C-130J team. Thus automation appears to increase or have no effect on workload in this scenario depending on the operator.


**Table 21: T-test results for Maximum Effort Airland data**

| $\alpha=0.05$   | Average Workload |         |         | Maximum Workload |         |         |
|-----------------|------------------|---------|---------|------------------|---------|---------|
|                 | Pilot            | Copilot | Aircrew | Pilot            | Copilot | Aircrew |
| <i>p</i> -value | 0.170            | <0.001  | <0.001  | <0.001           | 0.293   | <0.001  |
| Lower Workload  | Neither          | H       | H       | H                | Neither | H       |


## *Situation Awareness Analysis*

### SKE Formation Airdrop Scenario

The situation awareness assessment began by running a single iteration of the scenario and exporting the resulting charts for qualitative analysis. Strategic SA (Figures 19 and 20), which is not connected to any particular task or element, ran as a dedicated function in the task network (III. Methodology, Figure 13), computed a strategic SA value dependent on total experienced workload. The workload thresholds for High (0.75), Medium (0.75), and Low SA (0.25) were set to correspond with Endsley's theoretical SA-Workload Function (II. Literature Review, Figure 5). Thus, each operator would maintain high strategic SA until approaching overload, then strategic SA would diminish until it reached zero immediately prior to overload. Of note is that high strategic SA is maintained by all operators for the vast majority of the simulation run. These momentary dips correspond well to the workload peaks shown in Figures 15 and 17.

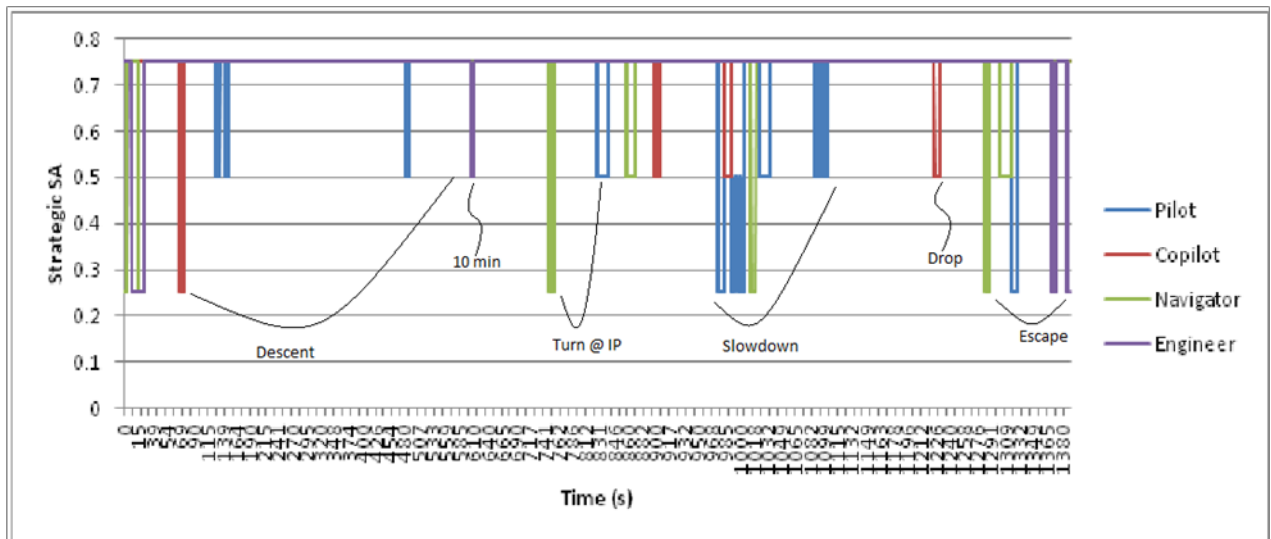


**Figure 19: C-130H SKE Formation Airdrop Strategic SA Distribution**

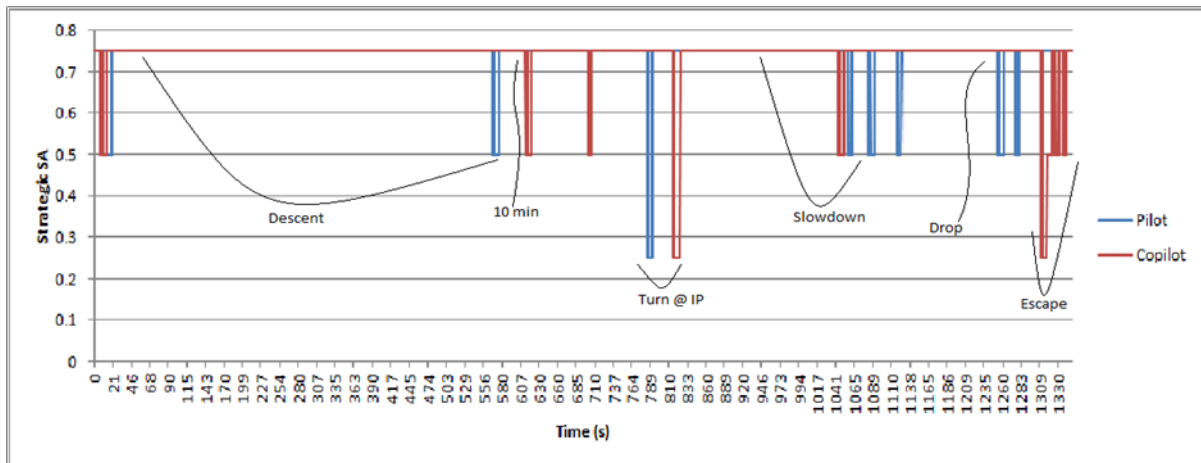


**Figure 20: C-130J SKE Formation Airdrop Strategic SA Distribution**

Tactical SA, which is SA linked to specific tasks, was coded into each IMPRINT task in both scenarios and both aircraft. When a given task was run, the beginning effect incrementally increased tactical SA to the applicable operators, and the ending effect incrementally decreased tactical SA by that same amount. Any elements of tactical SA important enough to store become represented by the strategic SA function. Not all tasks had an effect on tactical SA. Of those tasks that did positively increment tactical SA, their values were normalized to a range of 0-0.25 in order to fit with strategic SA scoring (Chapter III. Methodology: Measuring Workload and Situation Awareness). Note that more than one Tactical SA task can be accomplished simultaneously, thus permitting instantaneous Tactical SA to exceed 0.25. Tactical SA (Figures 21 and 22) was charted in a similar fashion to strategic SA.

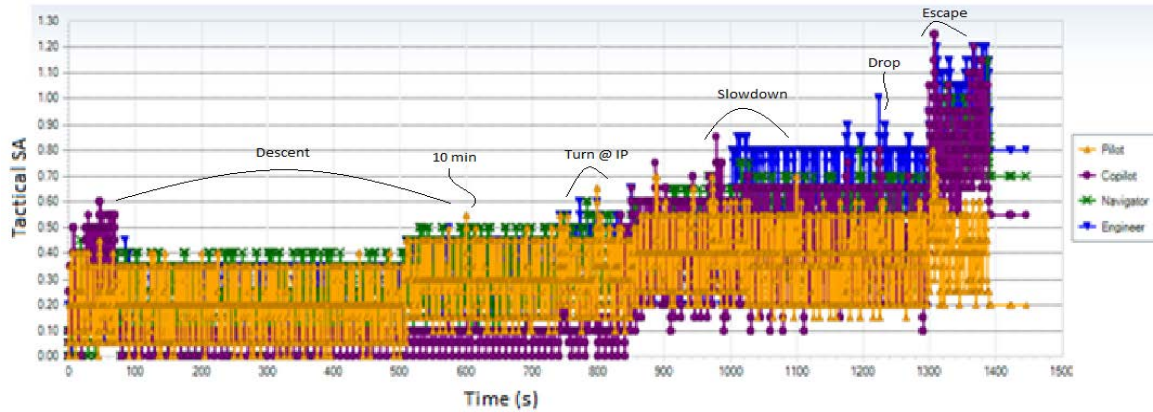

**Figure 21: C-130H SKE Formation Airdrop Tactical SA Distribution**

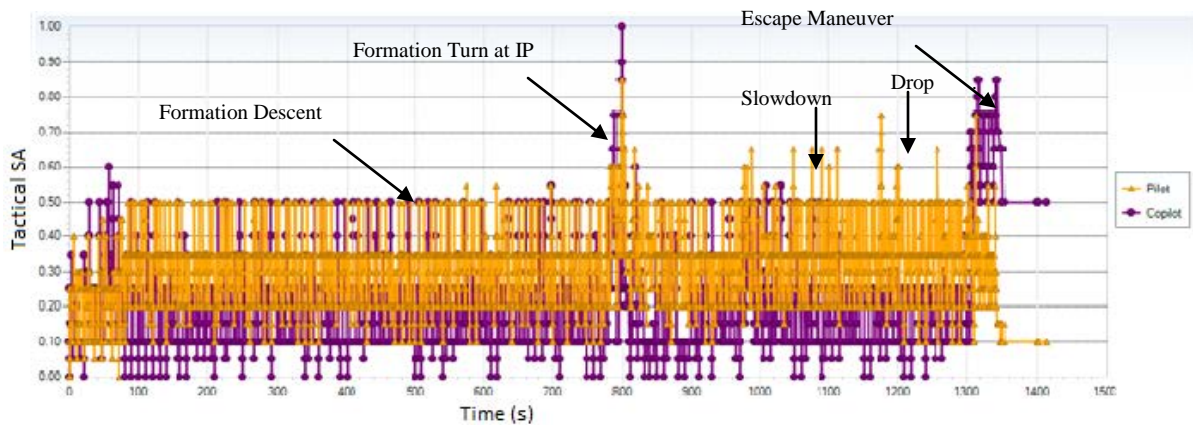


**Figure 22: C-130J SKE Formation Airdrop Tactical SA Distribution**


Inspecting Figure 21 reveals a sine wave centered on 0.20 units with amplitudes between 0.15-0.20. The sine wave increases as the scenario progresses possibly suggesting that as the aircraft nears the objective area and/or descends, there is an increase in SA-additive tasks. However, this effect is not observed in the C-130J (Figure 22). Of note, there are frequent FCI commands and verbal communications (both 0.05 tactical SA for the listener) and numerous gauge or instrument readings (0.15 tactical SA) in the C-130H iteration. Comparatively, the C-130J passes FCI commands transparently,

but both pilots refer to a HUD (0.15 in cruise and 0.20 in low level) and color multifunction display or moving map (0.25 tactical SA) which appears to have a significant effect on tactical SA. The C-130J maintains a more consistent linear sine wave centered on 0.35 with an amplitude of 0.15. The two formation turns: one at the Initial Point (IP) and the other while flying the escape maneuver, markedly improve tactical SA to the C-130J crew, since the pilots reference a multifunction display. Thus, it appears upon inspection that the crew of the C-130J has more tactical SA.

Simply adding tactical SA to strategic SA produces total SA. The C-130H shows that total SA remains relatively constant throughout the SKE formation airdrop with an increase in Copilot and Engineer total SA during the escape maneuver at the end of the simulation because their tactical SA increases significantly (Figure 23). Strategic SA negatively impacts total SA during the previously identified workload peaks: particularly during the formation turn, slowdown and escape maneuver (Pilot only). Conversely, C-130J total SA peaks during the formation turn and escape maneuver, but similarly declines during the slowdown (Figure 23). All total SA distributions are centered near 1.0, and no discernible advantage to either aircraft can be gathered by qualitatively comparing Figure 23 and Figure 24.

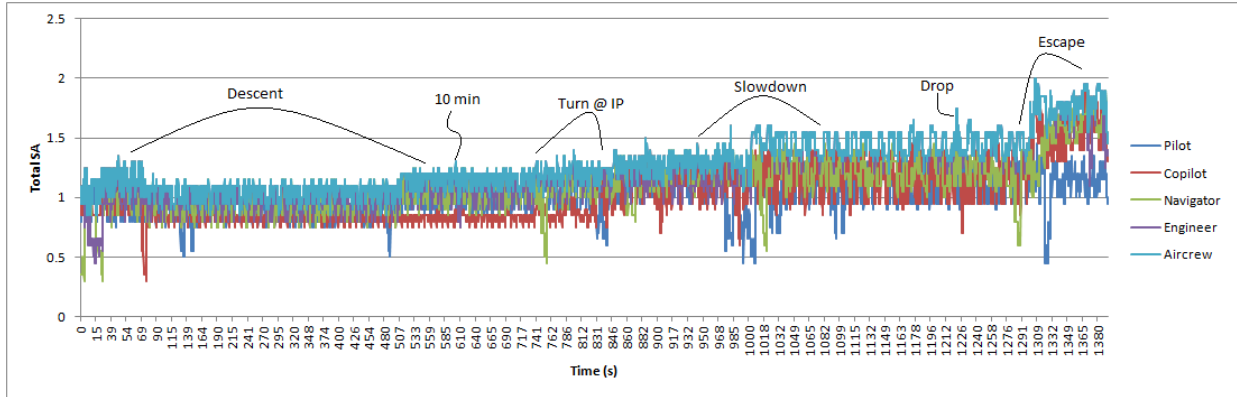

**Figure 23: C-130H SKE Formation Airdrop Total SA Distribution**

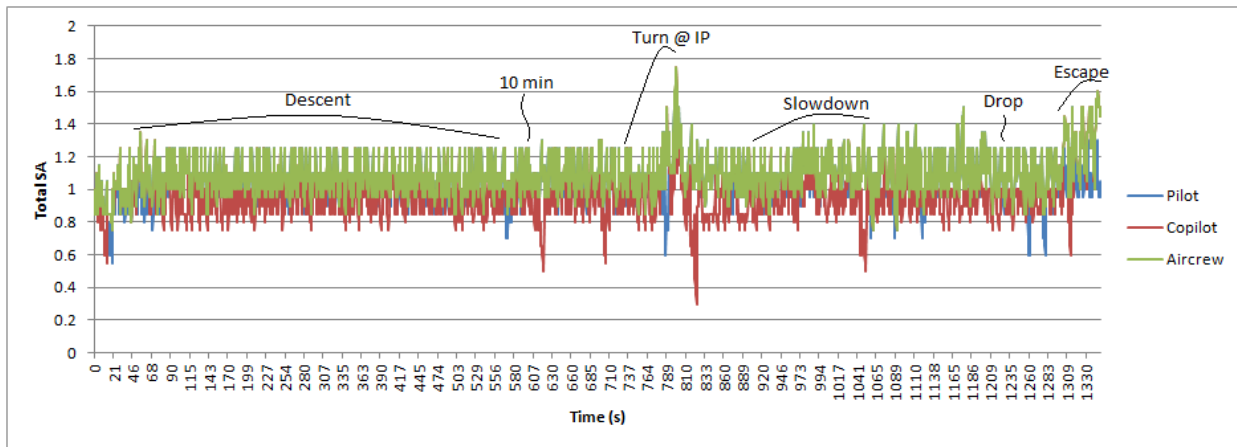

**Figure 24: C-130J SKE Formation Airdrop Total SA Distribution**

Because the SA outputs impose significantly higher computational effort, only five simulation runs were conducted to examine SA (Table 22, Table 23). Despite the limited number of iterations, standard deviation between data was low. Similar to the workload analysis, data that satisfies the  $t$ -test also meets the stricter significance criteria of the Bonferroni post hoc test to account for the family-wise error rate ( $m = 3$ ,  $\alpha_{\text{Bonferroni}} = 0.017$ ). Examining the quantitative data from these five iterations, the C-130H exhibited higher strategic SA for both the Pilot and Copilot (Table 24). However results



were mixed for tactical SA: the C-130J Pilot had more tactical SA while the C-130H Copilot had more tactical SA. Thus, total SA was inconclusive for the Pilot, but the C-130H Copilot and aircrew (Navigator and Engineer included) had more total SA.

**Table 22: SKE Formation Airdrop Average SA Data (C-130H)**

| Iteration | Strategic SA |         |           |          | Tactical SA |         |           |          | Total SA |         |           |          |       |
|-----------|--------------|---------|-----------|----------|-------------|---------|-----------|----------|----------|---------|-----------|----------|-------|
|           | Pilot        | Copilot | Navigator | Engineer | Pilot       | Copilot | Navigator | Engineer | Pilot    | Copilot | Navigator | Engineer | Team  |
| 1         | 0.674        | 0.694   | 0.685     | 0.697    | 0.280       | 0.274   | 0.371     | 0.468    | 0.954    | 0.969   | 1.056     | 1.166    | 1.220 |
| 2         | 0.677        | 0.698   | 0.683     | 0.700    | 0.299       | 0.271   | 0.361     | 0.470    | 0.976    | 0.969   | 1.043     | 1.170    | 1.219 |
| 3         | 0.676        | 0.697   | 0.687     | 0.698    | 0.285       | 0.274   | 0.381     | 0.494    | 0.962    | 0.971   | 1.068     | 1.192    | 1.241 |
| 4         | 0.675        | 0.699   | 0.683     | 0.698    | 0.295       | 0.261   | 0.375     | 0.490    | 0.969    | 0.959   | 1.058     | 1.188    | 1.238 |
| 5         | 0.671        | 0.697   | 0.684     | 0.696    | 0.277       | 0.258   | 0.385     | 0.476    | 0.948    | 0.955   | 1.069     | 1.171    | 1.226 |
| Average   | 0.675        | 0.697   | 0.684     | 0.698    | 0.287       | 0.268   | 0.374     | 0.480    | 0.962    | 0.965   | 1.059     | 1.177    | 1.229 |

**Table 23: SKE Formation Airdrop Average SA Data (C-130J)**

| Iteration | Strategic SA |         | Tactical SA |         | Total SA |         |       |
|-----------|--------------|---------|-------------|---------|----------|---------|-------|
|           | Pilot        | Copilot | Pilot       | Copilot | Pilot    | Copilot | Team  |
| 1         | 0.659        | 0.658   | 0.308       | 0.221   | 0.967    | 0.879   | 1.009 |
| 2         | 0.664        | 0.661   | 0.303       | 0.226   | 0.967    | 0.887   | 1.019 |
| 3         | 0.654        | 0.651   | 0.302       | 0.210   | 0.956    | 0.861   | 0.995 |
| 4         | 0.660        | 0.660   | 0.300       | 0.220   | 0.960    | 0.880   | 1.006 |
| 5         | 0.649        | 0.652   | 0.306       | 0.211   | 0.955    | 0.863   | 1.001 |
| Average   | 0.657        | 0.657   | 0.304       | 0.218   | 0.961    | 0.874   | 1.006 |


**Table 24: T-test results for SKE Formation Airdrop SA Data**

| Strategic SA |         | Tactical SA |         | Total SA |         |        |
|--------------|---------|-------------|---------|----------|---------|--------|
| Pilot        | Copilot | Pilot       | Copilot | Pilot    | Copilot | Team   |
| 0.001        | <0.001  | 0.036       | <0.001  | 0.869    | <0.001  | <0.001 |
| H            | H       | J           | H       | Neither  | H       | H      |


### Maximum Effort Airland Scenario

The Maximum Effort Airland scenario incorporated the same situation awareness (SA) algorithms found in SKE Formation Airdrop scenario. A single iteration run of this scenario on both C-130H and C-130J model is shown in Figure 25 and Figure 26. Not surprisingly, most operators spend of their time with high strategic SA (0.75) with the entirety of both simulations showing high SA for all operators after landing and while the

aircraft is on the ground. Inspecting both figures shows sustained excursions to lower levels of SA commensurate with increased setting up for the descent and the demanding slowdown/configuration phase following the 600-second mark. No clear qualitative strategic SA comparison between the C-130H and C-130J can be made for the Pilot or Copilot, but it appears that the C-130H has slightly higher team strategic SA.

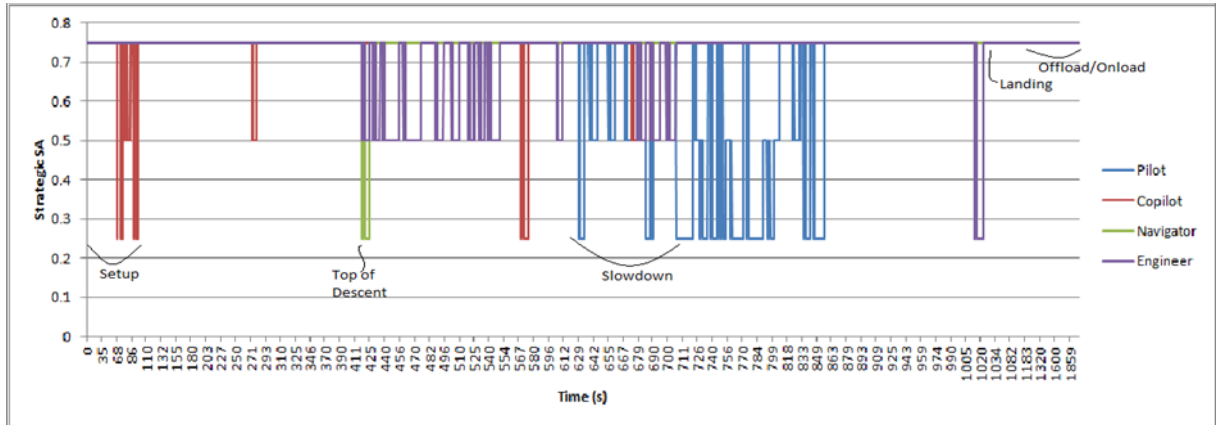


**Figure 25: C-130H Maximum Effort Airland Strategic SA Distribution**

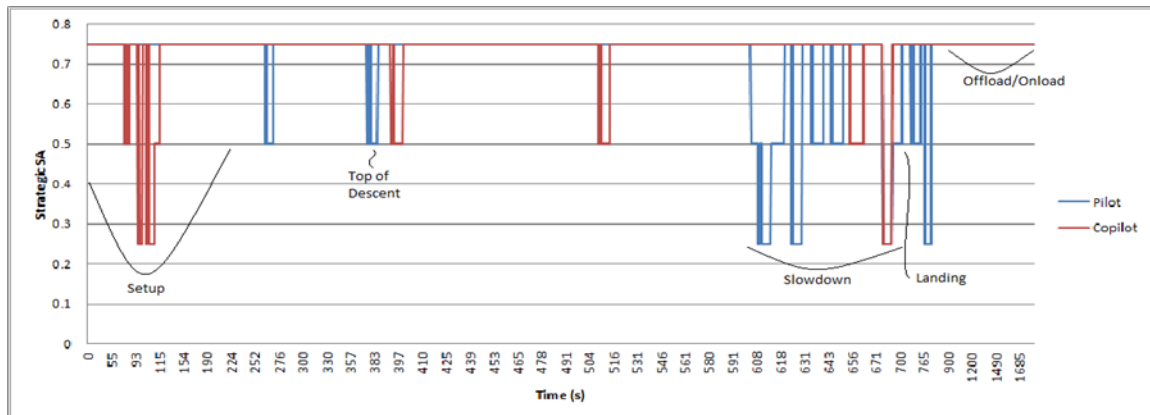


**Figure 26: C-130J Maximum Effort Airland Strategic SA Distribution**

Tactical SA trends follow similar patterns for the C-130H (Figure 27) and C-130J (Figure 28): a steadily increasing sine wave with a momentary spike in Pilot tactical SA

immediately prior to touchdown and low tactical SA for all operators while the aircraft is on the ground. The first 400 seconds of the simulation show no conclusive advantage in tactical SA, however, the C-130J appears to have slightly more tactical SA than the C-130H (C-130J: sine centered on 0.30, amplitude 0.2; C-130H: sine centered on 0.20, amplitude 0.15-0.2) from 400 seconds until touchdown. Once on the ground the C-130J had almost no tactical SA, while the C-130H Navigator maintained a constant 0.10 while standing in the safety observer position and watching the offload occur in the back of the aircraft.

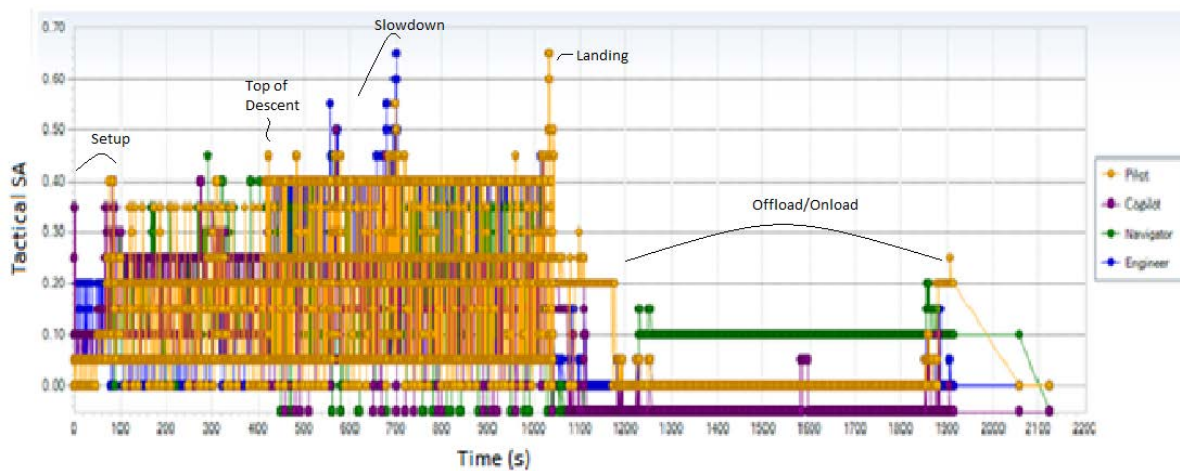


**Figure 27: C-130H Maximum Effort Airland Tactical SA Distribution**

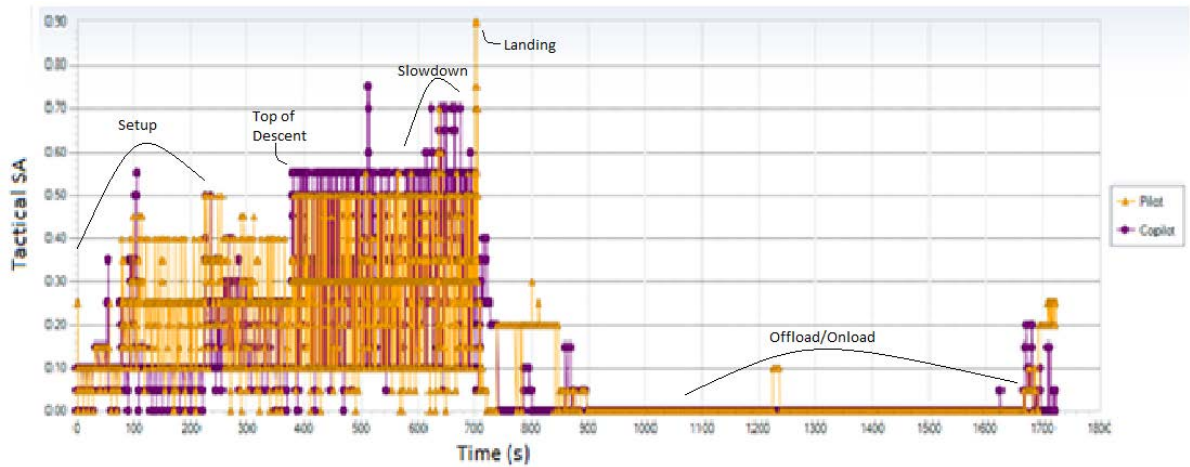


**Figure 28: C-130J Maximum Effort Airland Tactical SA Distribution**

When computing total SA, it is interesting to note that the average total SA distribution remains relatively constant while the aircraft is on the ground and few tactical SA tasks are being accomplished (Figure 29, Figure 30). In both C-130H and C-130J, the Pilot's total SA declined after landing, as expected, when tasks diminished, but the Copilot's and Engineer's total SA remained high while the aircraft was on the ground. Strategic SA appears to have had the largest negative impact on total SA, which corresponds to high-workload periods associated with preparing for the tactical approach, slowdown/configuration, and final approach. However, once the autopilot is disengaged and the tactical approach begins, the amplitude of the sine wave increases due to tactical SA associated with basic aircraft control tasks.

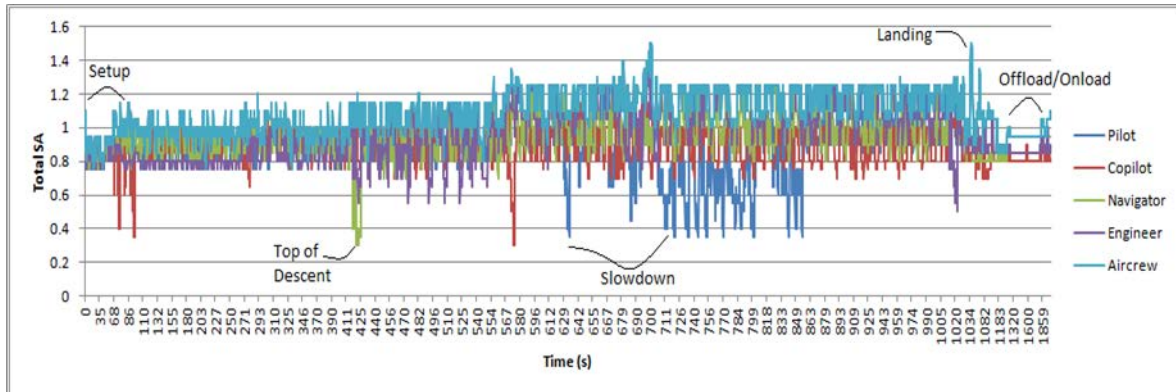

**Figure 29: C-130H Maximum Effort Airland Total SA Distribution**

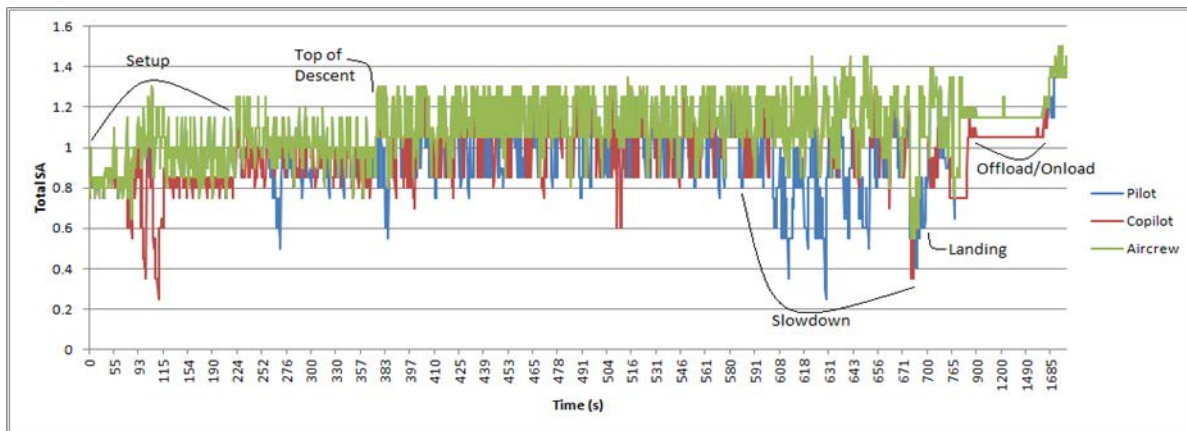

**Figure 30: C-130J Maximum Effort Airland Total SA Distribution**

Similar to the SKE Formation Airdrop scenario, five iterations were run to build a dataset on SA for both aircraft (Table 25, Table 26). Despite the limited number of iterations, standard deviation between data was low. Similar to the workload analysis, data that satisfies the *t*-test also meets the stricter significance criteria of the Bonferroni post hoc test to account for the family-wise error rate ( $m = 3$ ,  $\alpha_{\text{Bonferroni}} = 0.017$ ). Examining the data (Table 27), the C-130J Pilot experienced similar strategic SA, but higher tactical and higher total SA than the C-130H Pilot. The Copilot experienced lower

strategic SA in the C-130J, but the higher tactical SA which offset and led to higher total SA than the C-130H Copilot. Thus, while the C-130J Pilot and Copilot had higher total SA than their C-130H counterparts, the aircrew as a team experienced no significant difference in total SA because the C-130H Navigator and Engineer made sufficient contributions to even the differences.

**Table 25: Maximum Effort Airland Total SA Data (C-130H)**

| Iteration | Strategic SA |         |           |          | Tactical SA |         |           |          | Total SA |         |           |          |       |
|-----------|--------------|---------|-----------|----------|-------------|---------|-----------|----------|----------|---------|-----------|----------|-------|
|           | Pilot        | Copilot | Navigator | Engineer | Pilot       | Copilot | Navigator | Engineer | Pilot    | Copilot | Navigator | Engineer | Team  |
| 1         | 0.627        | 0.680   | 0.684     | 0.657    | 0.223       | 0.157   | 0.220     | 0.270    | 0.849    | 0.837   | 0.904     | 0.927    | 1.041 |
| 2         | 0.615        | 0.680   | 0.682     | 0.655    | 0.211       | 0.151   | 0.219     | 0.261    | 0.826    | 0.831   | 0.901     | 0.916    | 1.028 |
| 3         | 0.621        | 0.681   | 0.681     | 0.662    | 0.164       | 0.186   | 0.213     | 0.255    | 0.786    | 0.867   | 0.895     | 0.917    | 1.018 |
| 4         | 0.620        | 0.680   | 0.682     | 0.659    | 0.166       | 0.186   | 0.219     | 0.212    | 0.786    | 0.866   | 0.901     | 0.871    | 1.015 |
| 5         | 0.621        | 0.677   | 0.675     | 0.656    | 0.172       | 0.149   | 0.259     | 0.206    | 0.793    | 0.827   | 0.934     | 0.862    | 1.023 |
| Average   | 0.621        | 0.680   | 0.681     | 0.658    | 0.187       | 0.166   | 0.226     | 0.241    | 0.808    | 0.846   | 0.907     | 0.898    | 1.025 |

**Table 26: Maximum Effort Airland Total SA Data (C-130J)**

| Iteration | Strategic SA |         | Tactical SA |         | Total SA |         |       |
|-----------|--------------|---------|-------------|---------|----------|---------|-------|
|           | Pilot        | Copilot | Pilot       | Copilot | Pilot    | Copilot | Team  |
| 1         | 0.625        | 0.678   | 0.290       | 0.285   | 0.914    | 0.963   | 1.048 |
| 2         | 0.639        | 0.668   | 0.263       | 0.239   | 0.902    | 0.907   | 1.004 |
| 3         | 0.625        | 0.676   | 0.262       | 0.247   | 0.887    | 0.923   | 1.013 |
| 4         | 0.644        | 0.671   | 0.256       | 0.247   | 0.899    | 0.918   | 1.017 |
| 5         | 0.635        | 0.667   | 0.257       | 0.253   | 0.892    | 0.920   | 1.012 |
| Average   | 0.633        | 0.672   | 0.266       | 0.254   | 0.899    | 0.926   | 1.019 |


**Table 27: T-Test results for Maximum Effort Airland SA data**

|                 | Strategic SA |         | Tactical SA |         | Total SA |         |         |
|-----------------|--------------|---------|-------------|---------|----------|---------|---------|
|                 | Pilot        | Copilot | Pilot       | Copilot | Pilot    | Copilot | Team    |
| $\alpha=0.05$   |              |         |             |         |          |         |         |
| <i>p</i> -value | 0.075        | 0.015   | <0.001      | <0.001  | <0.001   | 0.004   | 0.316   |
| Higher SA       | Neither      | H       | J           | J       | J        | J       | Neither |


### *Situation Awareness-Workload Relationship*

While not a direct requirement to answer the investigative questions, a relationship between SA and workload can easily be measured. The strategic SA functions were programmed to be dependent variables of their operator's workload. Therefore, there was an intentionally direct (negative) correlation between strategic SA

and total workload. However, tactical SA remained independent of workload to an extent, although performing additional key tactical tasks will increase both tactical SA and workload. It was possible for the operators to maintain high SA under high workload, provided the operator's tasks also contributed towards SA. As a result, a scatter plot (Figure 31 and Figure 33) of total SA and workload revealed no discernible trend. This dissociation corresponds well with Endsley's (1993) experimental findings.

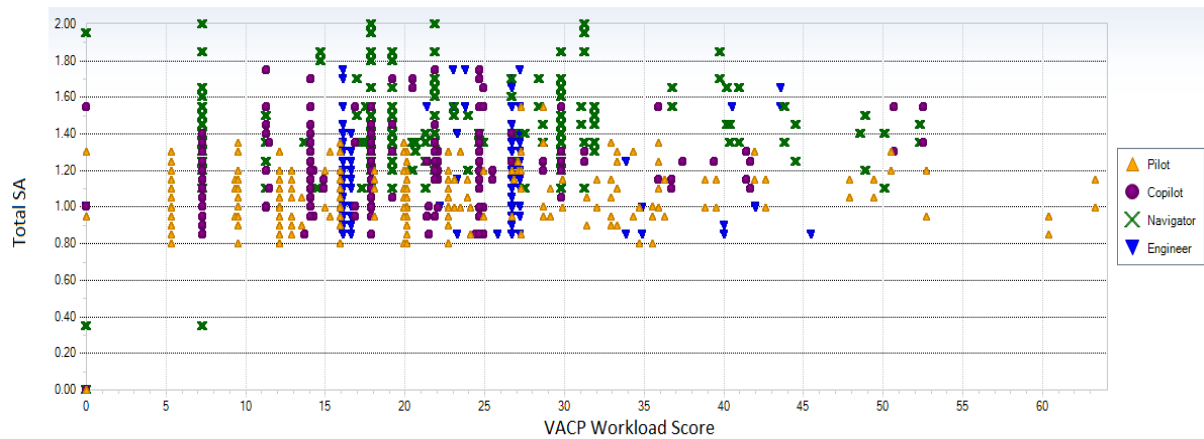


**Figure 31: C-130H SA-Workload Distribution, SKE Formation Airdrop**

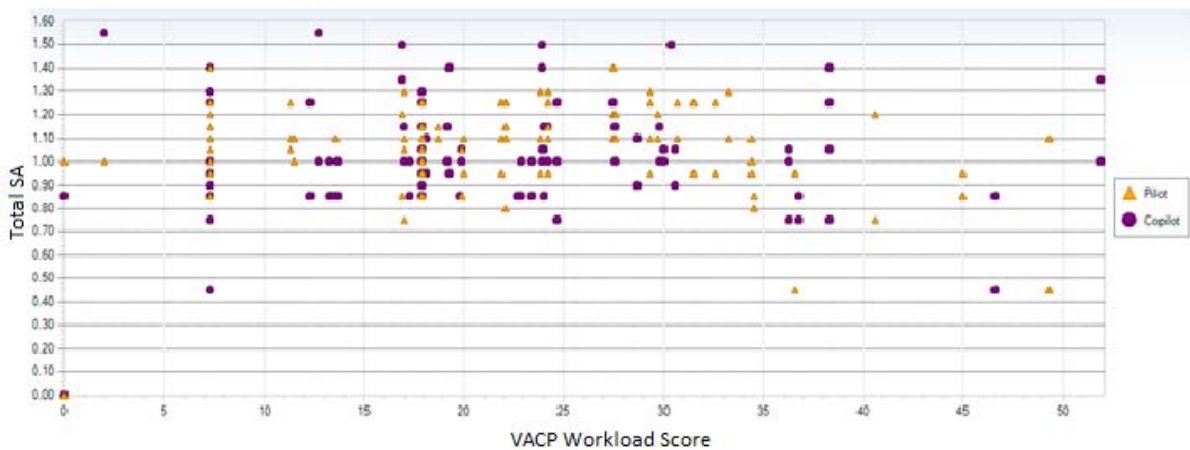


**Figure 32: C-130J SA-Workload Distribution, SKE Formation Airdrop**

The Maximum Effort Airland data exhibits high variance, however a loose trend begins to emerge that shows somewhat less dissociation than the SA-Workload relationship generated during the SKE Formation Airdrop scenario. The C-130H Pilot, Copilot, and Navigator (Figure 33) have total SA centered between approximately 0.90 and 1.00 until workload exceeds 32 units. At higher workloads, SA decreases and increases in variance. The C-130J Pilot and Copilot (Figure 34) have total SA centered at approximately 1.10 until workload exceeds 30 units, after which SA decreases and variance increases in an identical pattern to the C-130H's distribution. As an outlier, the Engineer has low total SA at lower workload and increases total SA as workload increases. Interestingly, these loosely correlate to Endsley's SA-Workload theory shown in Figure 5 (found in Chapter II. Literature Review).

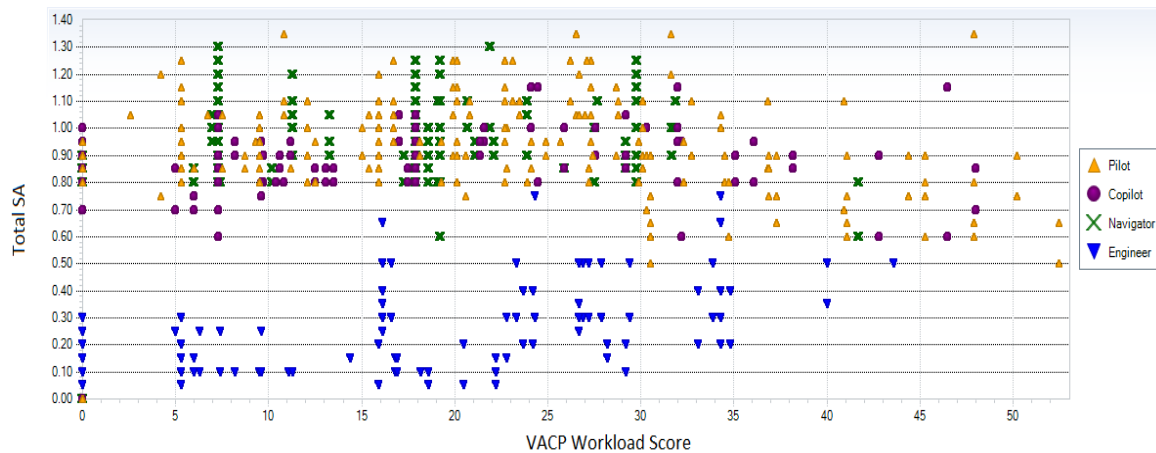

**Figure 33: C-130H Maximum Effort Airland SA-Workload Distribution**



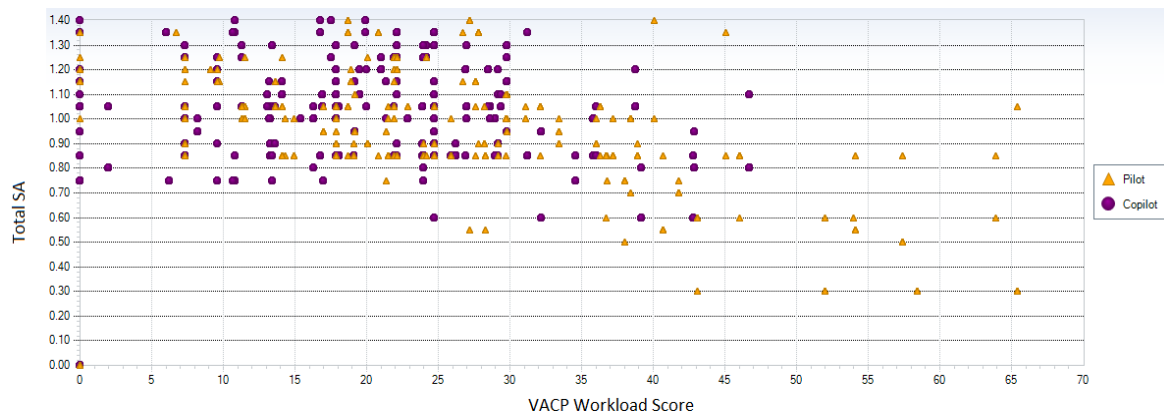

**Figure 34: C-130J Maximum Effort Airland SA-Workload Distribution**

## Summary

After examining the data, results were mixed and depended on both the situation and the aircraft. No particular operator or aircraft emerged as distinctly advantageous across both scenarios. The C-130J Pilot experienced less severe workload peaks (lower frequency, duration and intensity), lower average and maximum workload than the C-130H Pilot for airdrop, however this did not result in any difference in total SA. The Pilot's peak workload analysis and average workload were inconclusive for the airland scenario, but the C-130J Pilot experienced a lower maximum workload, yet maintained higher total SA than the C-130H Pilot.

The C-130J Copilot did not benefit from the increased automation as much as the airdrop scenario: workload peaks increased very slightly in frequency, duration, and intensity, while average workload decreased. Furthermore, the C-130H Copilot had higher total SA. During the airland scenario, the C-130J Copilot experienced the same frequency of workload peaks, but those peaks were of longer duration and higher

intensity, which also contributed to a higher average workload than the C-130H Copilot. Despite this, the C-130J Copilot had higher total SA than the C-130H Copilot.

As a crew, the C-130J experienced the same number of workload peaks, but of shorter duration and slightly lower intensity which contributed towards lower average and maximum workload values than the C-130H aircrew during the airdrop scenario. During the airland scenario, the C-130J averaged the same number of workload peaks, but thanks to the Copilot interface and task distribution, their duration and intensity were higher. Similarly, the C-130J aircrew experienced higher average workload throughout the scenario. However, the C-130J team SA was never higher than the C-130H. During the formation airdrop, neither the C-130J Pilot or Copilot experienced higher SA than their C-130H counterparts, so when Navigator and Engineer contributions towards team SA are considered, the C-130H actually had more total SA. However, while the C-130J Pilot and Copilot had higher total SA than the C-130H Pilot and Copilot, this was sufficiently offset by the contributions by the Navigator and Engineer to the point where both aircraft had identical team SA on average.

## **V. Conclusions and Recommendations**

### **Chapter Overview**

This chapter answers the hypotheses created by the investigative questions and draws research conclusions of this thesis based on the analysis performed in Chapter IV. The significance of these conclusions is discussed along with recommendations for actions and recommendations for future research.

### **Investigative Questions Answered**

#### ***Investigative Question #1***

***How does the use of automation affect workload during station keeping equipment (SKE) formation airdrop?*** To answer this question the following hypothesis was developed: automated cockpits (C-130J) result in lower workload than non-automated cockpits (C-130H) during SKE formation airdrop. In this scenario automation significantly reduced average workload, maximum workload, the occurrence of workload peaks, their duration and magnitude for the Pilot. Automation in the C-130J reduced the Copilot's average workload, had no significant change in maximum workload, and resulted in a slight increase in the occurrence and duration of workload peaks. When averaging the entire crew, automation significantly reduced average and maximum workloads, and reduced the occurrence and duration of workload peaks slightly. Therefore this research rejects the null hypothesis and finds support for increased automation reducing workload during the times the automation is performing to

expectation. During the SKE Formation Airdrop scenario the aircraft configuration, with the caveat that while Copilot average workload decreased with automation, had a negligible effect on peak workload.

### ***Investigative Question #2***

***How does the use of automation affect situation awareness during SKE formation airdrop?*** To answer this question the following hypothesis was developed: automated cockpits (C-130J) result in higher SA than non-automated cockpits (C-130H) during SKE formation airdrop. Three measures of SA were created to measure this: strategic, tactical, and total with total SA becoming the test statistic.

Due to the high level of variation in the SA graphs, no difference between the automated and non-automated SA could be qualitatively determined. However a quantitative analysis over five iterations showed that the Pilot experienced no significant difference in SA in the automated cockpit of the C130J. The Copilot and aircrew team SA was higher in the C-130H cockpit during the SKE Formation Airdrop Scenario. Because the difference in average total SA was either insignificant (Pilot) or lower in the automated cockpit (Copilot team), this research fails to find sufficient evidence that automation improves situation awareness.

### ***Investigative Question #3***

***How does automation affect aircrew workload during an airland mission?***

To answer this question the following hypothesis was developed: automated cockpits (C-130J) result in lower workload than non-automated cockpits (C-130H) during airland missions. In the Maximum Effort Airland scenario, automation did not significantly affect Pilot workload by any of the measures used (automation only reduced

the duration of Pilot workload peaks). However Copilot average workload increased on the automated system as well as the occurrence, magnitude, and duration of Copilot and crew workload peaks. Maximum observed workload increased for Pilot, Copilot, and the crew average. Because automation had either neutral or negative effects on workload, this research fails to find sufficient evidence to support the alternative hypothesis that increased automation reduces workload for Maximum Effort Airland missions.

#### ***Investigative Question #4***

***How does automation affect aircrew situation awareness during an airland mission?***

To answer this question the following hypothesis was developed: automated cockpits (C-130J) result in higher average SA than non-automated cockpits (C-130H) during SKE formation airdrop. Three measures of SA were created to measure this: strategic, tactical, and total with total SA becoming the test statistic. The automated cockpit had mixed results for total SA: both Pilot and Copilot had higher total SA as individuals, however the contributions made by the Navigator and Engineer offset those differences such that no statistically significant difference emerges. Thus, while the automation effectively replaces the Navigator and Engineer, there is insufficient evidence to support the alternative hypothesis that increased automation improves situation awareness for airland missions.

## **Conclusions of Research**

### ***Workload Conclusions***

The effects of automation on aircrew workload depend significantly on the situation at hand. Automation is far more complex than a simple on/off switch. Even though automated cockpits can take over several tasks from the human operator, the human operator is not necessarily left idle. Task burdens can shift from manipulating and doing to programming and supervising. While critical points exist in generally similar locations and times for both scenarios, automation can reduce workload peaks associated these critical times, but it also has the potential to create new critical points with high workload.

In this experiment, the highly automated C-130J showed significant reduction in all aspects of Pilot workload during the SKE Formation Airdrop Scenario by automating a majority of formation position maintenance and relaying formation commands. This was especially true during formation turns and the critical slowdown-airdrop-escape phase surrounding the drop zone. The C-130J Copilot had lower average workload, but slight increases in the number, duration, and intensity of workload peaks when no workload strategy was employed. Overall, the C-130J reduced the average workload and duration of peak workload, while having little to no effect on the number or intensity of those workload peaks. Thus, for the formation airdrop, the C-130J effectively reduces workload when substituting automation for the Navigator and Engineer.

Because the C-130J Pilot typically manually flies the descent and landing during a tactical approach to a landing zone in a fashion similar to the C130H, there was a negligible difference in average workload and the number of workload peaks between

cockpit designs for the Maximum Effort Airland Scenario. However, the C-130J Pilot experienced shorter workload peaks but of much greater intensity when no workload strategy was employed. The C-130J Copilot experienced higher average workload, and longer, more intense workload peaks. Overall the C-130J slightly increased average workload, and increased the intensity of peak workload beyond the overload threshold. Thus, for the airland scenario, the C-130J does not reduce workload by substituting automation for the Navigator and Engineer and requires the use of workload strategies to mitigate peak workload.

### ***Situation Awareness Conclusions***

Situation awareness depends not only on the situation, how the human operator interacts with that situation and whether the tasks performed contribute to or degrade SA and by how much. Certain tasks can add to SA when they provide information to the operator or utilize working memory. The automation of the C-130J was shown to increase total Pilot SA during both the formation airdrop and the airland scenarios. Since the Pilot was able to focus more effort on tasks that provide information, the quantity of information increased. Design improvements to the C-130J, namely the multifunction display, automated systems alerts, heads-up display, and better computing power improved the quality of data. The C-130J Copilot also experienced increased SA during the airland scenario (for the same reasons) but did not see an improvement over the C-130H Copilot during formation airdrop. Overall the C-130J provides a higher potential for SA than the C-130H for individuals (namely the Pilot), but this improvement does not extend towards team SA. While the C-130J effectively compensates for the replacement

of the Navigator and Engineer in the airland mission, it actually has lower team SA during the formation airdrop than the C-130H despite the legacy aircrew working harder.

Finally, the relationship between SA and workload model outputs was examined for potential trends. In the formation airdrop scenario, the relationship between workload and SA was highly dissociated and did not reveal any trends. This corresponds well to Endsley's SAGAT test data (1993). However, the airland scenario revealed that SA could be maintained at a high level (albeit with a large variance) until workload increases to a large level. This corresponds to Endsley's theoretical SA-workload function (II. Literature Review, Figure 5) from her same 1993 study.

### **Significance of Research**

Situation awareness is of prime importance to tactical and combat aviation, however measuring it typically occurs with prototypes, test articles, and real operators after the aircraft has been designed or even built. Perhaps of greatest significance to the research community is the development of a predictive workload algorithm that distinguishes between tactical SA and strategic SA and attempts to measure total SA in team settings of different sizes. While there have been limited previous attempts to model SA potential with discrete-event simulation, this thesis presents the most detailed analysis to deterministically predict SA and distinguish its origins between task-centric tactical SA and workload-limited strategic SA.

Because this study compares a four person cockpit crew of the C-130H with a more automated, two-person cockpit crew of the C-130J, it examines how workload and resultant SA changes when a human is removed from the cockpit and replaced with



automated systems. Predictive analysis of this phenomenon was not possible a generation ago when debates raged over reducing airline cockpits to a two-person affair. The research presented here confirms anecdotal evidence that the benefits of one system over the other depends on circumstance. The impact of removing two crewmembers from the cockpit and replacing them with automation has mixed results in both workload and situation awareness. This is probably not what the systems engineers intended when designing the C-130J.

The scenarios examined here are a staple of tactical airlift, both in training and in combat. While comprehensive data was not publicly available at the time of this writing, SKE formation airdrop represents approximately 35-40% of squadron-level tactical training and is typical in large exercises such as RED FLAG and the USAF Weapon's School Mobility Air Forces Exercise (MAFEX). More broadly, formation airdrop (both using SKE and visual procedures) may occur on up to 75% of training missions (Shinaberry, 2013). The Air Force mandates that pilots fly at least 12 SKE missions a year (AFI 11-2C-130, Vol 1, 2010). While formation airdrop (including the use of SKE) has been used in combat (Panama, 1989; Haiti, 1994; Iraq, 2014), based on this author's experience it represents perhaps less than 1% of deployed airlift missions. Single-aircraft airdrop missions were more prevalent in Afghanistan, reaching their peak in 2012. However, the mainstay of tactical airlift missions during Operations IRAQI FREEDOM and ENDURING FREEDOM has been single-aircraft airland. Perhaps 90% of airland missions in both theaters begin with some kind of tactical arrival as simulated in the Maximum Effort Airland scenario, with perhaps 30-40% of landings in Afghanistan

requiring maximum effort procedures. The remainder may use normal landing procedures or mix the two.

Further, while SA and workload affect each other, their correlation is not direct. In fact, the aircraft with higher workload also experienced higher total SA. This downplays the impact that sophisticated avionics would have on enhancing SA at all times. Put simply: it depends. However, this complex interplay between workload and SA further supports the complexity shown by Endsley (1993).

### **Recommendations for Action**

Systems Engineers and cockpit architects should carefully consider task allocation and information available to the aircrew. Reducing the size of the cockpit crew must correspond with an appropriate redesign of procedures to accommodate a reduction in required tasks and cumulative workload. This analysis shows that a workload reduction in one mission does not necessarily translate to reduced workload in all missions. Since the C-130J's much more sophisticated avionics (with increased data available to the pilots) did not result in a guaranteed increase in SA, engineers must also consider that total SA is not simply reflective of the total quantity of data, but also how and when it might be used. Clearly, the autopilot and autothrottles are advantageous when used (SKE Formation Airdrop), but only for the Pilot. Workload, however, increased heavily when one of the operators had to manipulate a keyboard or write data, thus adversely affecting operators other than the Pilot. Designers must consider small choices, such as whether to use a switch, button, dial, or computer entry when manipulating aircraft systems. While

multi-function and heads-up displays provided much richer SA, their utility was best realized at low-level. Still, there is no substitute for looking out of the window.

Finally, designers must consider not only technical procedures in the checklists, but how the aircraft might be employed operationally. This thesis included lookout doctrine, intra-cockpit communication, tactical employment, and procedures developed at the operational level into both workload and situation awareness analysis. The feedback from other crewmembers both added to workload and situation awareness which benefited the C-130H. Thus, operators should continue to learn how to best exploit the strengths of the systems design and provide copious feedback to avionics and cockpit designers to iterate the design process.

### **Recommendations for Future Research**

Since predictive SA modeling is an immature science, further experiments are needed to validate the novel approach taken here. Ideally a SAGAT or other similar objective SA measurement technique could be used to validate this experiment's output. Specifically, experiments are required to determine which tasks add to tactical SA, by how much, and if it is possible for a task to detract from tactical SA. Another study into tactical SA should be conducted. Another survey should be produced which explains tactical versus strategic SA, quantity/quality of information versus priority of information, and opportunity costs versus incorrect SA. The rating scale should very carefully explain negative SA scores and consider not including them at all. Phases of flight may require more detail than cruise, airdrop, or airland, as SA values may change

with altitude, proximity to objective area, or other mission factors. Also, more survey respondents should be used in a future survey in order to reduce variability.

The thresholds for high, medium, and low strategic SA should be established experimentally as well as the cognitive workload required to maintain strategic SA. The relative weight of strategic and tactical SA on total SA requires further study. While this experiment seeks to model Level 1 SA some tasks in both networks included a component of evaluation (i.e. evaluate aircraft performance, “is aircraft safe to drop?” etc), Level 2 and Level 3 SA could potentially be simulated in future experiments. Further research should look into possible methods to predicatively model higher SA levels.

Team SA, as described in this thesis, may be the first and best existing attempt at quantifying such a complex concept, but it still leaves much to be desired. Further research should be devoted towards understanding and capturing the complex interactions between team members in order to build collective team SA. While the current method of setting team SA equal to the individual with the highest SA, this ignores how the information is shared between individuals on that team and how their attention is prioritized, which effectively eliminates any positive contribution from lower SA individuals. Further research should seek to establish a measureable relationship between individual SA and SA for the collective team.

The experiments described in this thesis are based on “normal” operations. That is, a baseline scenario with few perturbations and no abnormal situation or unanticipated change. These baseline models could be manipulated to introduce unanticipated changes such as in-flight emergencies, threat reactions, and off-course maneuvering. For example,

how would automation affect workload and situation awareness during formation airdrop or maximum effort airland differ when unanticipated change or abnormal situations are introduced? Further studies could examine other C-130 missions as described in Appendix A: Description of C-130 Aircraft.

Finally, to what extent does automation reliance have in terms of mission effectiveness and performance (beyond workload and situation awareness directly) versus a legacy system with larger crew complements? Drop accuracy and time over target data are regularly collected by operational units. Subjective evaluations from exercises and after action reports could be qualitatively analyzed to compare C-130J and C-130H performance. Further analysis must be conducted to determine how automation, workload and SA affect those results instead of individual proficiency level or other factors.

## **Summary**

This thesis describes a novel method to predict aircrew situation awareness in an attempt to determine the effects of automation on aircrew workload and situation awareness during two specific tactical airlift missions. The analysis results indicate that automation generally reduces workload and increases situation awareness, especially for the Pilot, but results are somewhat mixed and highly dependent on scenario and crew position. The significance of these results (and the novel methodology) are discussed, as well as recommended actions. Finally recommendations for continued research are made: chiefly, validation of the predictive situation awareness methodology via

experimentation and running similar discrete-event simulations with unanticipated abnormal situations injected to force aircrew reaction.

## **Appendix A: Description of C-130 Aircraft and Missions**

### **C-130 Roles and Missions**

As a tactical airlifter, the primary mission of the C-130 is movement of cargo and passengers over relatively short distances (i.e. intra-theater) via airland (landing on established runways and landing zones) or airdrop (parachute delivery to a drop zone). Cargo may consist of loose items, vehicles and rolling stock, or palletized cargo that interlocks into rails located on the left and right side of the cargo compartment. The C-130 can simultaneously carry both passengers and cargo in both airland and airdrop roles and quickly off-load them through a rear-loading ramp and side-facing paratroop doors. Rollers mounted to the cargo floor allow for easy roll-on/roll-off of cargo pallets and the cargo compartment can be quickly reconfigured to accommodate a new load.

The C-130 can accomplish a wide variety of special mission sets in both modified and unmodified aircraft. Aeromedical evacuation of wounded patients requires is a common mission performed with regular C-130s in combat zones. Selected Air National Guard and AF Reserve units perform specialized airborne firefighting services with the Modular Airborne Fire Fighting System (MAFFS): a roll-on/roll-off pallet train and specialized training in MAFFS employment. Antarctic resupply is accomplished on ice runways with ski-equipped LC-130H aircraft from the New York Air Guard. The Air Force Special Operations Command (AFSOC) employs highly modified C-130 aircraft to perform close air support (CAS) and interdiction fires, infiltration/exfiltration of special operations forces, helicopter and tilt-rotor air refueling. C-130s have also been tasked for

search and rescue (SAR), served as radio relays, electronic warfare platforms, and command and control assets. However, the bulk of conventional C-130 missions are airland and airdrop, both in formation and as a single aircraft.

The C-130J, with its two-person cockpit (Pilot and Copilot) relies on a modern glass cockpit and automation to replace the duties performed by the Navigator and Engineer found on the C-130H. The C-130J avionics are capable of automatic systems monitoring and provide both an enhanced quantity and quality of data available to the aircrew. The C-130J avionics system is radically different than the C-130H. The H-model “steam gauges” of analog round-dial instruments are replaced by pilots’ heads-up displays (HUD), color multi-function displays (MFD), and an upgraded mission computer and software. This mission computer (Communications, Navigation, Intercom-Multipurpose Unit, or CNI-MU), monitors aircraft systems health, plots the navigation solution, controls the primary flight displays (MFD and HUD), tunes radios, manages, provides circuit protection, controls defensive system settings, computes performance data, and manages station keeping (SKE) formation parameters (TO 1C-130J-1, 2009). All of this is done through a keyboard and monochromatic interface. Conversely, the Self-Contained Navigation System (SCNS) in the C-130E/H primarily plots the navigation solution and tunes radios (TO 1C-130H-1, 2010). Prior to the SCNS upgrade in the 1990s, the C-130 depended heavily on having a pilot tune each radio separately and a navigator manually plotting position and manipulating the aircraft steering solution. Both SCNS and the CNI-MU function as a Flight Management System (FMS) to varying extents: the CNI-MU integrates more sensors and performs more function than SCNS.



Because so many features are built into the CNI-MU's control layers, the C-130J eliminated dozens of mechanical circuit breakers, analog gauges, and switches. Some of these circuit breakers were located outside of the cockpit, and some functions, such as loading cryptographic data into radios required the copilot to crawl under the flight deck ladder or scramble through the cargo compartment in order to load. Systems monitoring moved from the Flight Engineer to the aircraft, and many switches and gauges located on the C-130H navigator station and overhead panel (even out of the pilots' reach) were consolidated into the CNI-MU or moved to be within reach of the pilots (TO 1C-130E(H), 2009; TO 1C-130H-1, 2010; TO 1C-130J-1, 2009). While MFDs are manipulated via the CNI-MU and other soft-keys surrounding them, the C-130H utilizes more toggle switches, push buttons, and dials to manipulate the cockpit.

Each aircraft presents information differently. The color MFDs can be customized to the pilot's preference, whereas analog gauges have a very limited ability to display different data. Analog gauges may use some logic to trip a warning light when an operational limitation is exceeded, or they may have a painted marker defining a normal operations range. Unless there is a warning light to capture the operator's attention, it is entirely incumbent upon that operator to identify when a system has malfunctioned. In the case of a loss in propeller hydraulic fluid ("Prop Low Oil" light), a warning light illuminates on the engine instrument stack to indicate that any one of the four propellers is losing fluid, but the Copilot or Engineer must look to the Copilot's side shelf to identify the problematic propeller (TO 1C-130H-1, 2010; TO 1C-130(K)H-1, 2010). The C-130H3 includes Mode Advisory, Caution and Warning System (MACAWS) panels which track multiple system parameters, consolidate warning lights in fewer locations,

and alerts the aircrew with a flashing “Master Caution” when certain MACAWS alerts are triggered (TO 1C-130(K)H-1, 2010). While this serves to call greater attention to malfunctions, MACAWS treats major and minor malfunctions with the same level of primacy. This can be distracting when a relatively minor malfunction diverts attention during critical phases of flight.

The C-130J integrates even more systems monitoring than the C-130H3. Alerts are generated by the mission computer and cued on the HUD (TO 1C-130J-1, 2009). This draws the pilots’ attention to one of the MFDs for the computer-diagnosed problem. The pilots can thus run a checklist that shares the same name as the computer-diagnosed problem, versus staring at a series of instruments and gauges and manually deducing the origin and name of the problem (Shinaberry, 2013). Therefore, a pilot could theoretically all but remove systems monitoring from their instrument scan.

Because of the size and complexity of the C-130H cockpit, several instruments are hidden by the flight controls. Even the SKE Plan Position Indicator Scope occupies a significant portion of the center windscreen and obscures forward visibility (TO 1C-130E(H), 2009). The C-130H3 and C-130J incorporate the SKE display into existing glass displays. Since MFDs and other “glass cockpit” displays can incorporate more complex data displays and layer that data, a significant number of gauges disappeared from the pilots’ instrument panel, resulting in a “cleaner” appearance and fewer places to search for information.

C-130J airdrops are primarily automatic, computer-releases, whereas C-130E/H is capable of a computer-released airdrop, but it is almost always done manually. That is, one of the pilots must actuated the “green light” and ADS button (if applicable) at the navigator’s “green light” call. Furthermore, because pre-SCNS C-130s did not have a computer-derived Computer Air Release Point (CARP), C-130H crews extensively rely on the navigator to manually determine a preflight CARP and update the SCNS CARP during the mission. As a result, the navigator can verbally direct the pilot to make adjustments to the CARP based on last minute observations in ballistics. This judgment skill allows the navigator to command “green light” visually by manually sighting the desired point of impact against a known reference in the aircraft and using timing (AFI 11-231, 2005). While the C-130J can drop visually at extremely low altitude, regular employment of these “sight-angle” drops are largely unique to the legacy C-130H. Frequently, the only known data points in the ballistic wind profile are surface winds reported by the drop zone and the winds sensed by the aircraft at drop altitude. Because this can lead to errors in ballistic data, the C-130H navigator can make adjustments based on visual cues such as smoke or correct from prior strike reports, whereas the C-130J pilots are very reluctant, if not restricted from making slight windage adjustments (Shinaberry, 2013). Also, any changes to the Point of Impact (target on the DZ) or major CARP adjustments require reprogramming the navigational solution. Manipulating the mission computer (SCNS or CNI-MU) drives significant workload for the operator assigned to it (pilot not flying in the C-130J or the C-130H navigator). However, in some cases, changes in PI can be handled quicker in the C-130H because the aircrew can rely on visual means to manually release the airdrop load, but the C-130J must reprogram the

CNI-MU to accommodate dependence on computer guidance and release (Frampton, 2009). Although, as the C-130J matures, tactics to drop visually and improve responsiveness are being developed (Frampton, 2009).

Parachute drops are very sensitive to wind due to their extended time of fall compared to an object falling purely ballistically (such as a bomb). Thus, minor variations caused by DZ reporting error, old data, or low level wind shear have measurable effects on accuracy. While a purely computer-derived drop is more likely to drop with the same or higher accuracy when ballistic wind data is good, when the input data is poorer quality, the human operator must use judgment to apply a correction factor. C-130H aircrews do this routinely, and while a C-130J aircrew could also apply a correction factor, in practice they adhere strictly to computer-generated CARPs, provided that data is judged reasonable and safe (Kennedy, 2015; Shinaberry, 2013).

Because the C-130J's autopilot and autothrottles can be coupled Computed Aircraft Positioning System (CAPS) SKE formation position, the aircraft can be flown in formation enroute through the drop completely on autopilot. The C-130H, however, is not equipped with autothrottles, and the SKE formation must be flown manually based on a scope return and gauge needles. Once exception: the C-130H Pilot could engage "altitude hold" on the autopilot, while manually flying lateral and longitudinal position with the control yoke and throttles.

The C-130 Avionics Modernization Program (AMP) represents another significant overhaul of C-130H cockpits to include a glass cockpit, new radios, data-links, FMS, air data system and even a HUD to improve mission capability and ensure future compliance with communications, navigation and air traffic management required

to operate in high-density airspace, such as Europe (Nelson, Dunavold, & Dickson, 2010). Converting all C-130Hs to the AMP standard would eliminate differences training and qualifications to aircraft that are superficially similar (for instance, the author was required to maintain differences training and separate qualifications on the C-130E, H1, H2, and H3 aircraft simultaneously)(GAO, 2014). AMP aircraft replaced analog gauges from the C-130H with six color MFDs, a FMS, pilot and copilot HUDs, and new system alerting interfaces. The AMP represents a major upgrade to the avionics architecture while retaining legacy SKE, propulsion and most other systems, while automating the position of navigator yet retaining the flight engineer. While the AMP has not been operationally fielded to the C-130H fleet (due to costs and widespread conversion to the C-130J), test results reinforce the demands of tactical aviation: formation flying, low level terrain avoidance, and frequent time and course adjustments to respond to airspace and threats.



**Figure 35: C-130 AMP cockpit(GAO, 2014)**

Test results showed a satisfactory performance of SKE enroute and airdrop without a navigator present, yet airspace and terrain display data limitations caused an unsatisfactory increase in workload and poor time control performance using the available FMS. Furthermore, flight management duties, such as route changes (i.e. off course maneuvering and flight plan modifications) and time control resulted in unacceptably high workloads due to poor automation of navigator functions (Nelson, Dunavold, & Dickson, 2010). Further studies conducted by the Government Accountability Office showed that while the C-17 and C-130J do not include the navigator, certain airlift and combat missions are augmented with a third pilot. Thus, if workload overburdens a two-pilot cockpit to the point where a third pilot is required to

mitigate workload, the savings offset by removing the navigator from the aircraft are significantly offset (GAO, 2014).

The C-130 AMP tests were conducted as tactical training missions using both visual and SKE formation airdrops, both in leader and wingman positions, employed with C-130H procedures. Test aircrew evaluated workload using the Bedford scale (similar to the Cooper-Harper scale) and a post-mission interview with a human factors expert (Nelson, Dunavold, & Dickson, 2010). During these tests, it was found that the AMP could attain a time over target (TOT) within required tolerances, but only with considerable pilot effort. During most phases of flight, the flight engineer workload was satisfactory with enough time to complete primary and additional tasks. In many phases of flight the pilots reported instances where workload was tolerable and only a small amount of time was available to complete additional tasks. However for the lead aircraft in formation during airdrop, cruise, and general formation flight created some instances where workload was marginally possible with minimal time remaining for additional tasks (Nelson, Dunavold, & Dickson, 2010).

While some of the higher workload ratings were to be expected (task demands of coordinating with air traffic control, for example), the requirement to plot and avoid threats, make subsequent adjustments to time control in order to meet a desired TOT drove workload to unacceptable levels. Primarily this was due to the requirement to program the FMS with each required change coupled with the FMS' inability to accommodate multiple complex parameter changes (altitude, speed, course). Furthermore, the test participants reported high levels of workload associated with the mission that was shared between legacy C-130H and AMP aircraft. Specifically, the

simultaneous demands during a SKE airdrop to send SKE commands, monitoring and making radio calls, obtaining clearances, completing checklists, searching for and visual evaluation of the drop zone, setting up the navigation solution, and wingman considerations (Nelson, Dunavold, & Dickson, 2010).

Technology, such as Missile Warning Systems (MWS) and Radar Warning Receivers, exist on both the H and J to detect threats, and in some instances, dispense countermeasures, but aircrew are trained and expected to augment these systems in both threat detection and reaction. One advantage the C-130J has is the incorporation of threat symbology in the HUD, whereas the C-130H crew must look inside the cockpit to determine the source of the threat. However, with increase speed of recognition comes a trade in dependency and fixation on the HUD's limited field of view—neglecting scanner duties in positions other than 12 o'clock (Burgess, 2005; Kennedy, 2015; Shinaberry, 2013).



## **Appendix B: Detailed Scenario Narratives**

### **Scenario 1: Station Keeping Equipment (SKE) Formation Personnel Airdrop**

A formation uses Station Keeping Equipment (SKE) to maintain formation position when conditions do not permit visual formation procedures and can be quite large (up to 36 airplanes on a single channel) (TO 1C-130H-1, 2010; TO 1C-130(K)H-1, 2010; TO 1C-130J-1, 2009). Flying SKE has a rather extensive set of “contracts” that aircraft maintain with each other (AFTTP 3-3.C-130E/H, 2010; AFTTP 3-3.C-130J, 2010; AFI 11-2C-130, Vol 3, 2010). These contracts include allowable deviations in airspeed, altitude, heading, and position error over the drop zone. Over the drop zone alone, the formation and element lead aircraft each have a maximum cross-track deviation and a timing window, and the wingman and element lead aircraft have a maximum formation (track-while-scan) lateral deviation (AFTTP 3-3.C-130E/H, 2010; AFTTP 3-3.C-130J, 2010). Finally each element drops 50 feet higher than the preceding element to ensure parachutes do not contact following aircraft (AFI 11-2C-130, Vol 3, 2010).

Because it has the most restrictive contracts, element lead in a SKE formation is considered one of the more difficult formation positions to maintain in the C-130H, especially when over the drop zone. Element lead must maintain his formation position relative to the formation lead, maintain positional awareness of the wingman in front of him (if the preceding wingman drifts back too far, he is in conflict with element lead), manually relay SKE computer commands via push button on the Flight Command Indicator (FCI), while maintaining a stable platform for his wingman and following

element. However, CAPS (Coordinated Aircraft Positioning System) coupled to the autopilot and autothrottles has largely relieved the C-130J crew of manual formation position maintenance and sending most FCI commands (TO 1C-130J-1, 2009).

C-130J pilots have described an easier ability to maintain an accurate formation position. C-130E/H crews describe SKE as flying an hour-long ILS (precision instrument approach) because of the concentration of chasing and centering multiple needles (Delgado, 2014; Shinaberry, 2013; Kennedy, 2015; Pedersen, 2015). The C-130J uses CAPS (Coordinated Aircraft Positioning System), which can be coupled to the autothrottles (TO 1C-130J-1, 2009). Even C-130J formation slowdowns (i.e. slowing from enroute airspeed to drop airspeed) are normally done with autothrottles (AFTTP 3-3.C-130J, 2010). SKE must be manually hand-flown in the C-130H (exception: can use only altitude hold function of the autopilot) (TO 1C-130H-1, 2010; TO 1C-130(K)H-1, 2010).

On C-130H aircraft, crews fly SKE formation positions by referencing a Plan Position Indicator scope (PPI) (large stand-alone CRT on top of pilots' instrument panel of E/H1/H2 or AN/APN-241 radar display mode for upgraded H1/H2 aircraft and all H3 aircraft). The PPI displays a circle blip for the lead aircraft and a square blip for all other SKE formation members. Also, SKE airplanes have a Track While Scan (TWS) function that shows formation position with mechanical needles. Left and right cross track deviation take the place of the pilots' flight director, a vertical deviation carat is in lieu of glide slope indication, and a stand-alone in-track deviation/range. TWS works in conjunction with the PPI to aid the pilot in maintaining formation position (TO 1C-130H-1, 2010; TO 1C-130(K)H-1, 2010).

CAPS displays other SKE formation members as separate aircraft shapes in plan view on a Heads-Down-Display which, unlike the C-130H PPI (including H3, can also overlay flight planned route, other airborne traffic, tactical information and other navigational information on the same screen. The pilot can incorporate CAPS symbology into the Heads-Up-Display (HUD), and has new symbology not available to the C-130H pilot: speed carets, desired path box (TO 1C-130J-1, 2009). The C-130J presents “fly-to” symbology in addition to deviation symbology (i.e. the cross-track, elevation and range deviation needles on the C-130H1). CAPS enables 35 degrees of bank coupled to autopilot (TO 1C-130J-1, 2009), thus removing the hard bank angle limit of 20 degrees imposed on formation and element leaders in the C-130H (AFI 11-2C-130, Vol 3, 2010).

A significant part of SKE procedure and training is how to execute turns, climbs, descents, airspeed changes, and airdrop as a formation. The SKE computer is capable of transmitting and receiving simple commands through the Flight Command Indicator (FCI) panel. The C-130H Navigator and Pilot share FCI tasks, where CAPS automatically sends most FCI commands in the C-130J. SKE (C-130E/H) requires two preparatory commands (at 30 and 5 seconds to go) and one execute (“E”) FCI command, range, and true airspeed for a computer turn. A properly formatted SKE computer turn command from the lead aircraft automatically starts a timer in the wingman’s SKE computer to command the wingman to turn over the same geographic point as lead. Furthermore the TWS needle transitions from cross track deviation to commanding a bank angle to maintain formation position in the turn. (TO 1C-130H-1, 2010; TO 1C-

130(K)H-1, 2010). As the wingman approaches the rollout point the TWS needle returns to cross track deviation.

CAPS (C-130J) can automatically send SKE commands to wingman C-130J aircraft or manually push SKE commands to C-130H aircraft (AFTTP 3-3.C-130J, 2010). A C-130J SKE formation is primarily flown with autopilot and autothrottles engaged (AFTTP 3-3.C-130J, 2010). Since there are continuously computed “fly-to” commands on the HUD and on the CAPS display, and CAPS automatically sends position commands, there are considerably fewer procedures for flying SKE with CAPS. This is manifested in C-130 Initial Qualification courses. While both the C-130H and C-130J both devote six simulator events to SKE training, the C-130H requires at least three SKE missions performed in the aircraft versus only one SKE mission for the C-130J (Delgado, 2014).

The workload impact of manually sending FCI commands have been described by pilots as significant (Kennedy, 2015; Shinaberry, 2013; Delgado, 2014). While enroute the Navigator relays initial commands (30 seconds before execution) and any numerical information (such as wind/drift information, altimeter settings, etc.). The Pilot (C-130H) relays “5 second” and “execute” commands while flying the aircraft. Nowhere is this workload more apparent than the slowdown, airdrop, and escape sequence. After the Navigator relays “30 seconds to slowdown” via the FCI, the Pilot is responsible for the next nine FCI commands until completion of the escape maneuver. This slowdown-drop-escape sequence involves a significant change in airspeed, descent to drop altitude, aircraft configuration, precise formation and course maintenance, numerous checklist

responses, and radio calls. This shift in FCI tasks to the Pilot occurs during an already high-taskload phase in the mission.

In order to execute airdrops in inclement weather, C-130E/H formation and element lead aircraft are required to be equipped with AWADS (Adverse Weather Aerial Delivery System) and trained in order to guide “dumb” (non-AWADS) wingmen across a drop zone (AFI 11-2C-130, Vol 3, 2010). AWADS is a high-resolution ground mapping radar (i.e. the AN/APN 241 low power color radar) that requires the navigator to analyze multiple radar targets and update the navigational solution to fine tune system position on the terminal leg for the airdrop. Because C-130E/H aircraft were initially equipped with the lower resolution AN/APN-59 radar (which is only viewable at the navigator’s station when the SKE PPI is installed), AWADS was considered a special qualification and dependent on having precision radar-equipped aircraft available. However, the C-130J is equipped with the AN/APN-241 radar as standard, and since it is intended to automatically guide the aircraft to the release point and automatically drop, AWADS-like capabilities are already built into the aircraft and the special-qualification is superfluous. Thus, provided that the aircraft’s navigation solution is “tight,” no update is required (Delgado, 2014).

Instead of a separate SKE Control Panel blocking copilot lower windows, the CAPS/SKE controls are integrated into the CNI-MU (Communication/Navigation/Identification-Management Unit) interface pages. The SKE Control Panel uses rotary thumb wheels and push buttons as a user interface and is only accessible to the copilot, while the CNI-MU uses a keyboard and is the same primary interface used for most avionics data manipulation. Both interfaces control formation parameters (range, lateral,

and vertical position), designation of the leader and other formation members, SKE frequency, clock synchronization, and proximity alarm settings. While legacy SKE provides the crew with a proximity alarm if another formation aircraft is closer than a user-defined value CAPS will sound the proximity alarm if the closure rate with another formation aircraft is judged to be excessive or another aircraft is inside the user-defined proximity range(TO 1C-130H-1, 2010; TO 1C-130J-1, 2009).

This scenario twenty minutes before the formation leader's time over target (TOT) to the drop zone (DZ) with the "20 minute advisory" and the beginning of the Preslowdown Checklist. Throughout the scenario, the pilot and navigator (C-130H) or CAPS (C-130J) is relaying required SKE FCI commands. The formation begins at an enroute altitude and airspeed and must initialize a descent, then execute a turn to align with the DZ axis over the initial point (IP). Proper alignment is to ensure the entire "stick" of paratroopers land along the long axis of a rectangular DZ. After completion of the turn at the IP, the Copilot must reset the lateral position in the SKE Control Panel (C-130H) or CNI-MU (C-130J). Then, the formation slows from enroute airspeed to drop airspeed (Slowdown Checklist) then descends to drop altitude. The C-130H Navigator performs terminal AWADS updates to tighten the navigational solution. The Pilot fine tunes formation and navigation position closer to the DZ and the crew verifies that the aircraft has met all formation airdrop contracts and is in a safe position to drop.

When the aircraft reaches the Computed Air Release Point (CARP), the Navigator (C-130H) or Copilot (C-130J) calls for "green light," the troop jump light is illuminated, and the jumpers exit the aircraft (Release Point Checklist). The aircrew then delays to allow follower aircraft before climbing and executing the formation escape maneuver.

This scenario ends with the formation established at enroute airspeed and altitude and the Completion of Drop checklist finished.

## **Scenario 2: Maximum Effort Airland**

A penetration descent is achieved by reducing power to idle at a precisely calculated distance and diving at high speed to a desired configuration altitude. The aircrew might plan to use the penetration descent to one of many high-speed, low altitude tactical arrivals, each with their own entry and exit parameters. Either at configuration altitude or during a low altitude tactical arrival, the aircraft must level off and slow down to lower gear and flaps. When approach speed is reached, the aircraft makes a steep final approach to the runway. Ideally, the throttles would remain at idle from enroute altitude until less than one nautical mile from landing.

In many parts of Afghanistan, Air Traffic Control (ATC) radar coverage is non-existent and consists only of the “tower” or LZ control team. Aircraft avoid each other procedurally using a coded position report. Traffic avoidance and terrain clearance is at the pilots’ own risk and ATC can only give advisories of other known aircraft that have checked in on that given frequency. The aircrew must avoid tactical Restricted Operating Zones (ROZ), high terrain, and weather. There may be no useable instrument approach, yet cloud layers from a passing thunderstorm require negotiation.

Remote FOBs may have short (as little as 3000 feet, or about a third the length and width of a normal runway), narrow, or unpaved, landing zones (LZ) that require maximum effort (assault) procedures (AFI 11-2C-130, Vol 3, 2010; AFI 11-2C-130J, Vol 3, 2009; AFI 13-217, 2007). The LZ may have a significant uphill/downhill gradient or

even a hump. Frequently, the runway is gravel or dirt or is in fair to poor condition. This type of landing is done at speeds below normal approach and landing speeds (with reduced stall margins) and touchdowns in a zone as little as 500 feet long (~2.5 seconds of flight time) and lit by only five infrared lights (AFI 13-217, 2007). The increased level of precision upon landing drives a more stabilized approach (i.e. tighter parameters) and is less forgiving than landing on a 10,000 foot long runway common at many Air Force bases. This forces the crew to maintain a carefully controlled, but aggressive descent profile, and it highlights the difference made by incorporating a heads-up display (HUD).

First, a configuration or ingress (if using a random tactical approach) altitude is chosen. From this altitude, a final approach point (point where aircraft descends from configuration altitude with landing gear and flaps extended) and minimum slowdown distance is determined. These two distances are manually calculated from established rules of thumb or extracted from tabulated data. The altitude to lose from enroute altitude to determines the length of the high-speed penetration segment. This is calculated by rules of thumb, tabulated data, or charts from the aircraft performance manual. The length of the penetration segment is added to the slowdown distance and final approach segment to obtain the total approach length. This number is adjusted for aircraft weight, winds aloft, terrain, and airspace considerations (AFTTP 3-3.C-130E/H, 2010; AFTTP 3-3.C-130J, 2010).

The C-130H aircrew manually calculates several altitude vs. distance “gates” (Figure 12) and compares SCNS (Self Contained Navigation System) distance-to-go and altimeter against are determined to evaluate energy management. The Navigator programs the final approach glideslope into SCNS which aides the Pilot in determining



energy and aim point on the LZ touchdown zone. While there are many techniques to manipulate SCNS and evaluate the energy state, this data is displayed only as course deviation and distance on the Horizon Situation Indicator and as raw numerical data on the SCNS control panels located outside of the normal field of view from the pilots' instrument panel. The C-130J aircrew enters a computed flight path angle into the CNI-MU (Communication/Navigation/Identification-Management Unit), which is displayed on the flight director and heads-up display (HUD). Based on current descent performance, the navigation display will show where the aircraft will arrive at the programmed altitude on the flight plan route. While SCNS will provide a numerical output for the winds experienced at that moment, the CNI-MU will apply wind-correction logic to the flight path. If the pilots' input a waypoint for the slowdown point, then the CNI-MU will calculate the vertical error to that waypoint, thus providing a real-time evaluate the aircraft's energy state (AFTTP 3-3.C-130J, 2010).

If the aircraft is descending too rapidly (ahead of profile) then the pilot may glide at a slower airspeed, proceed on a more direct routing to the LZ, or, as a last option, add power. If the aircraft is not descending quickly enough (behind profile), the pilot must choose a more indirect routing (adding travel distance), slowdown and configure the aircraft at a higher altitude, or change the type of tactical arrival (i.e. overhead pattern instead of high-speed straight-in).

Finally, on final approach with the LZ in the HUD field of view, the HUD flight path vector shows exactly where the aircraft is pointing, thus enabling an instantaneous decision whether or not the aircraft can make the LZ or will overshoot and go around. While C-130H pilots must visually evaluate the aircraft aim point on the LZ touchdown

points using the relative motion of the runway against the window, the C-130J HUD flight path vector precisely shows where the aircraft is going.

This scenario starts with the autopilot engaged and the aircraft at enroute altitude and airspeed some distance away from the landing zone (LZ). The pilots calculate penetration descent data for the airfield. The Copilot contacts air traffic control (ATC) to obtain latest weather conditions. The Navigator (C-130H) or Copilot (C-130J) makes updates the navigation solution to the landing runway and informs the tactical airspace controller and is released to ATC control. The Engineer (C-130H) calculates by hand, or Pilot/Copilot (C-130J) enter into the CNI-MU, takeoff and landing data (TOLD). The non-flying pilot checks the TOLD accuracy. After briefing the approach and landing, the Pilot calls for the Descent checklist.

Then the Pilot reduces the throttles to flight idle and begins a high-speed descent as close as possible to the airfield, circumnavigating the largest mountains visually with the help of the Copilot, Navigator (C-130H), or moving map displays. Both pilots evaluate the aircraft energy state and make corrections (lateral or vertical), as necessary, to maintain or regain the appropriate descent profile. ATC may desire periodic position reports and identify air traffic that the aircrew must avoid. At the calculated slowdown point, the Pilot levels the aircraft, while keeping the throttles at idle, commands for flaps “on speed” (incrementally lowering flaps at their design limit speed), gear, and the Before Landing checklist. When the LZ is visually identified, the Copilot reports “Field in sight” to ATC and requests permission to land.

On final approach the aircrew flies a steep 6-9 degree glide slope (compared to 3 degrees for a commercial airliner) until 150 ft, then adds power and reduces descent rate.

The Copilot advises the Pilot where he assesses the aircraft aim point is (left/right, long/short) and airspeed deviations (5 knots fast/3 knots slow). The Navigator (C-130H) reads radar altimeter settings to the Pilot in the last 50 feet, while the Copilot states sink rate and airspeed as the Pilot's scan transitions entirely outside. The aircraft touches down firmly inside the marked 500-foot long touchdown zone and the Pilot moves the throttles from flight idle to ground idle. After a quick verification from the Copilot of true airspeed (C-130J) or from the Engineer that there is no propeller malfunction, the Pilot, applies maximum braking and reverse thrust while slowing the aircraft to taxi speed.

During the ground roll, the Pilot reaches the tiller wheel and transfers control of the yoke to the Copilot. Meanwhile, the Loadmaster, upon command from the Pilot, opens the cargo ramp and door and prepares for the engines-running offload (ERO) as the Pilot executes a 180 degree turn in the pothole-riddled ramp on the far side while the rest of the crew assists the Pilot to avoid the ditch and numerous obstacles parked on the confined ramp. After setting the parking brake, the Loadmasters offload old cargo and upload new cargo while the Engineer (C-130H) or Copilot (through the CNI-MU—C-130J) computes TOLD. Maximum effort TOLD includes takeoff ground run, acceleration-check time, refusal speed, maximum effort takeoff speed, Fifteen minutes after landing, the offload and subsequent upload and ERO checklist is complete. The Pilot taxis to the runway then calls for the Before Takeoff checklist while the Copilot obtains a departure clearance.



## Appendix C: Situation Awareness Task Assessment

### Situation Awareness Task Assessment

Name: \_\_\_\_\_ Airframe(s)/MDS: \_\_\_\_\_ Crew Position: \_\_\_\_\_

Please rate the following generic aircrew tasks according to their effect on situation awareness (SA) for the operator performing those tasks. Consider whether the following tasks increase or decrease SA compared to a hypothetical state where the operator has his/her eyes closed. Columns are provided for three phases: normal cruise, airdrop, and airland mission events. SA is the operator's perception (or mental model) of elements in the environment around him/her within a volume of space and time, the comprehension of their meaning, and the projection of their status into the future<sup>1</sup>. Note: SA should not be misconstrued with the workload associated with that task.

Rating scale: -----Degraded-----Neutral-----Improved-----

| Significant | Noticeable | Slightly | No Effect | Slightly | Noticeable | Significant |
|-------------|------------|----------|-----------|----------|------------|-------------|
| -3          | -2         | -1       | 0         | +1       | +2         | +3          |

| MISSION EVENT: |                                                       | CRUISE<br>FLIGHT | FORMATION<br>AIRDROP | ASSAULT<br>LANDING |
|----------------|-------------------------------------------------------|------------------|----------------------|--------------------|
| 1              | Reading instrument or gauge                           |                  |                      |                    |
| 2              | Reading MFD/moving map/digital display                |                  |                      |                    |
| 3              | Viewing Head's Up Display (HUD)                       |                  |                      |                    |
| 4              | Looking out of window                                 |                  |                      |                    |
| 5              | Reading raw computer data                             |                  |                      |                    |
| 6              | Radar/sensor interpretation                           |                  |                      |                    |
| 7              | Keyboard/data entry                                   |                  |                      |                    |
| 8              | Writing (data cards, kneeboard, etc.)                 |                  |                      |                    |
| 9              | Reading charts, "sticks," approach plates             |                  |                      |                    |
| 10             | Manual computations (whiz wheel, TOLD, tab data, etc) |                  |                      |                    |
| 11             | Talking, simple (advisory calls, responses)           |                  |                      |                    |
| 12             | Talking, complex (briefings, radio calls, etc)        |                  |                      |                    |
| 13             | Listening, simple (alerts, advisory call)             |                  |                      |                    |
| 14             | Listening, complex (radio, crew feedback)             |                  |                      |                    |
| 15             | Background listening (monitoring RWR, radio)          |                  |                      |                    |
| 16             | Simple maneuvering (maintaining parameters)           |                  |                      |                    |
| 17             | Complex maneuvering (defensive reactions)             |                  |                      |                    |
| 18             | Simple button/switch actuation                        |                  |                      |                    |
| 19             | Cumbersome button/switch actuation                    |                  |                      |                    |

Remarks:

<sup>1</sup> Endsley, M. R. (1988a). Situation Awareness Global Assessment Technique. *Proceedings of the IEEE 1988 National Aerospace and Electronics Conference: NAECON 1988*. 3, pp. 789-795. Dayton: IEEE.

## Appendix D: Task Listings and Tactical SA Assignments

**Table 28: Task Listing and Tactical SA for Basic Aircraft Control (C-130H)**

| Tac SA Value | Task ID | Function                         | Task                            |
|--------------|---------|----------------------------------|---------------------------------|
| 0            | 0       | (Root)                           | START Flying                    |
| 0            | 1_0     | Basic Aircraft Control (C-130H)  | START                           |
| 0            | 1_1_0   | Control the Airplane (P)         | START                           |
| 0            | 1_1_2   | Control the Airplane (P)         | Adjust throttles                |
| 0            | 1_1_3   | Control the Airplane (P)         | Move Rudder Pedals              |
| 0            | 1_1_4   | Control the Airplane (P)         | Move control yoke               |
| 0            | 1_1_5   | Control the Airplane (P)         | Wait                            |
| 0            | 1_1_999 | Control the Airplane (P)         | END                             |
| 0            | 1_2_0   | Scan for threats (All)           | START                           |
| 0            | 1_2_10  | Scan for threats (All)           | Delay3                          |
| 0.15/2       | 1_2_11  | Scan for threats (All)           | Scan outside (E)                |
| 0            | 1_2_12  | Scan for threats (All)           | Call threat (N)                 |
| 0            | 1_2_13  | Scan for threats (All)           | Call threat (P)                 |
| 0            | 1_2_14  | Scan for threats (All)           | Scan outside (LM)               |
| 0            | 1_2_15  | Scan for threats (All)           | Dispense counter- measures (N)  |
| 0            | 1_2_16  | Scan for threats (All)           | Maneuver airplane (P)           |
| 0            | 1_2_17  | Scan for threats (All)           | Call threat (CP)                |
| 0            | 1_2_18  | Scan for threats (All)           | Call threat (E)                 |
| 0.2          | 1_2_19  | Scan for threats (All)           | Monitor safety of flight (CP)   |
| 0            | 1_2_2   | Scan for threats (All)           | Report threat (CP)              |
| 0            | 1_2_20  | Scan for threats (All)           | Dispense counter- measures (LM) |
| 0            | 1_2_21  | Scan for threats (All)           | Call threat (LM)                |
| 0.2          | 1_2_22  | Scan for threats (All)           | Monitor safety of flight (N)    |
| 0.15/2       | 1_2_23  | Scan for threats (All)           | Scan outside (P)                |
| 0.2          | 1_2_24  | Scan for threats (All)           | Monitor safety of flight (E)    |
| 0.05         | 1_2_3   | Scan for threats (All)           | Listen RWR1                     |
| 0.05         | 1_2_4   | Scan for threats (All)           | Listen RWR                      |
| 0.15/2       | 1_2_5   | Scan for threats (All)           | Scan outside (CP)               |
| 0.15/0.2     | 1_2_6   | Scan for threats (All)           | Scan outside (N)                |
| 0            | 1_2_7   | Scan for threats (All)           | Delay                           |
| 0            | 1_2_8   | Scan for threats (All)           | Delay1                          |
| 0            | 1_2_9   | Scan for threats (All)           | Delay2                          |
| 0            | 1_2_999 | Scan for threats (All)           | END                             |
| 0            | 1_3_0   | Monitor Aircraft Performance (P) | START                           |
| 0            | 1_3_1_0 | Navigate the Airplane (P)        | START Navigating                |
| 0.1          | 1_3_1_2 | Navigate the Airplane (P)        | Read stick diagram              |
| 0.15         | 1_3_1_3 | Navigate the Airplane (P)        | Monitor SCNS Distance to Go     |
| 0.15         | 1_3_1_4 | Navigate the Airplane (P)        | Monitor SCNS Xtrck              |
| 0.15         | 1_3_1_5 | Navigate the Airplane (P)        | Monitor Heading                 |
| 0            | 1_3_1_6 | Navigate the Airplane (P)        | Monitor Ground Speed            |
| 0.1          | 1_3_1_7 | Navigate the Airplane (P)        | Ensure terrain clearance        |
| 0            | 1_3_1_8 | Navigate the Airplane (P)        | Calculate time status           |

|      |           |                                  |                               |
|------|-----------|----------------------------------|-------------------------------|
| 0    | 1_3_1_9   | Navigate the Airplane (P)        | Routing                       |
| 0    | 1_3_1_999 | Navigate the Airplane (P)        | END                           |
| 0    | 1_3_10    | Monitor Aircraft Performance (P) | Nothing                       |
| 0    | 1_3_11    | Monitor Aircraft Performance (P) | Calculate Pilot correction    |
| 0    | 1_3_12    | Monitor Aircraft Performance (P) | Autopilot?                    |
| 0    | 1_3_13    | Monitor Aircraft Performance (P) | Delay                         |
| 0    | 1_3_2_0   | Formation Position (P)           | START Formation Flying        |
| 0    | 1_3_2_2   | Formation Position (P)           | Calculate Pursuit Curve       |
| 0    | 1_3_2_3   | Formation Position (P)           | Calculate Closure velocity    |
| 0.15 | 1_3_2_4   | Formation Position (P)           | Monitor SKE in-track distance |
| 0.15 | 1_3_2_5   | Formation Position (P)           | Monitor Elevation WRT Lead    |
| 0.15 | 1_3_2_6   | Formation Position (P)           | Monitor SKE Xtrack            |
| 0    | 1_3_2_7   | Formation Position (P)           | Routing                       |
| 0    | 1_3_2_999 | Formation Position (P)           | END                           |
| 0.15 | 1_3_4     | Monitor Aircraft Performance (P) | Monitor pitch                 |
| 0.15 | 1_3_5     | Monitor Aircraft Performance (P) | Monitor airspeed              |
| 0.15 | 1_3_6     | Monitor Aircraft Performance (P) | Monitor bank angle            |
| 0.15 | 1_3_7     | Monitor Aircraft Performance (P) | Monitor altitude              |
| 0.15 | 1_3_8     | Monitor Aircraft Performance (P) | Monitor Vertical velocity     |
| 0    | 1_3_9     | Monitor Aircraft Performance (P) | Routing                       |
| 0    | 1_3_999   | Monitor Aircraft Performance (P) | END                           |
| 0    | 1_4_0     | Pilot Monitoring Duties (CP)     | START                         |
| 0    | 1_4_1_0   | Navigate the Airplane (CP)       | START Navigating              |
| 0.1  | 1_4_1_2   | Navigate the Airplane (CP)       | Read chart                    |
| 0.15 | 1_4_1_3   | Navigate the Airplane (CP)       | Monitor SCNS Distance to Go   |
| 0.15 | 1_4_1_4   | Navigate the Airplane (CP)       | Monitor SCNS Xtrck            |
| 0.15 | 1_4_1_5   | Navigate the Airplane (CP)       | Monitor Heading               |
| 0.15 | 1_4_1_6   | Navigate the Airplane (CP)       | Monitor Ground Speed          |
| 0.1  | 1_4_1_7   | Navigate the Airplane (CP)       | Ensure terrain clearance      |
| 0    | 1_4_1_8   | Navigate the Airplane (CP)       | Calculate time status         |
| 0    | 1_4_1_9   | Navigate the Airplane (CP)       | Routing                       |
| 0    | 1_4_1_999 | Navigate the Airplane (CP)       | END                           |
| 0.15 | 1_4_10    | Pilot Monitoring Duties (CP)     | Monitor airspeed              |
| 0    | 1_4_11    | Pilot Monitoring Duties (CP)     | Autopilot?                    |
| 0    | 1_4_12    | Pilot Monitoring Duties (CP)     | Delay                         |
| 0    | 1_4_2_0   | Formation Position (CP)          | START Formation Flying        |
| 0    | 1_4_2_2   | Formation Position (CP)          | Calculate Pursuit Curve       |
| 0    | 1_4_2_3   | Formation Position (CP)          | Calculate Closure velocity    |
| 0.15 | 1_4_2_4   | Formation Position (CP)          | Monitor SKE in-track distance |
| 0.15 | 1_4_2_5   | Formation Position (CP)          | Monitor Elevation WRT Lead    |
| 0.15 | 1_4_2_6   | Formation Position (CP)          | Monitor SKE Xtrack            |
| 0    | 1_4_2_999 | Formation Position (CP)          | END                           |
| 0.15 | 1_4_4     | Pilot Monitoring Duties (CP)     | Monitor bank angle            |
| 0.15 | 1_4_5     | Pilot Monitoring Duties (CP)     | Monitor altitude              |
| 0.15 | 1_4_6     | Pilot Monitoring Duties (CP)     | Monitor Vertical velocity     |
| 0    | 1_4_7     | Pilot Monitoring Duties (CP)     | Provide Feedback to Pilot     |
| 0.25 | 1_4_8     | Pilot Monitoring Duties (CP)     | Evaluate Aircraft Performance |
| 0.15 | 1_4_9     | Pilot Monitoring Duties (CP)     | Monitor pitch                 |

|      |         |                                 |                             |
|------|---------|---------------------------------|-----------------------------|
| 0    | 1_4_999 | Pilot Monitoring Duties (CP)    | END                         |
| 0    | 1_5_0   | Navigate the Airplane (N)       | START Navigating            |
| 0.15 | 1_5_10  | Navigate the Airplane (N)       | Monitor Heading             |
| 0.15 | 1_5_11  | Navigate the Airplane (N)       | Monitor Ground Speed        |
| 0.1  | 1_5_12  | Navigate the Airplane (N)       | Ensure terrain clearance    |
| 0.15 | 1_5_13  | Navigate the Airplane (N)       | Observe weather radar       |
| 0    | 1_5_14  | Navigate the Airplane (N)       | Autopilot?                  |
| 0    | 1_5_15  | Navigate the Airplane (N)       | Delay                       |
| 0    | 1_5_2   | Navigate the Airplane (N)       | Direct Pilot corrections    |
| 0    | 1_5_3   | Navigate the Airplane (N)       | Calculate time status       |
| 0    | 1_5_4   | Navigate the Airplane (N)       | Do nothing                  |
| 0    | 1_5_5   | Navigate the Airplane (N)       | Routing                     |
| 0.1  | 1_5_6   | Navigate the Airplane (N)       | Read chart                  |
| 0    | 1_5_7   | Navigate the Airplane (N)       | Routing task                |
| 0.15 | 1_5_8   | Navigate the Airplane (N)       | Monitor SCNS Distance to Go |
| 0.15 | 1_5_9   | Navigate the Airplane (N)       | Monitor SCNS Xtrck          |
|      |         |                                 |                             |
| 0    | 1_5_999 | Navigate the Airplane (N)       | END                         |
| 0    | 1_6_0   | Monitor systems (E)             | START                       |
| 0    | 1_6_10  | Monitor systems (E)             | Do nothing                  |
| 0    | 1_6_11  | Monitor systems (E)             | Autopilot?                  |
| 0    | 1_6_12  | Monitor systems (E)             | Delay                       |
| 0.05 | 1_6_2   | Monitor systems (E)             | Listen (P)                  |
| 0.05 | 1_6_3   | Monitor systems (E)             | Listen (CP)                 |
| 0.05 | 1_6_4   | Monitor systems (E)             | Listen (N)                  |
| 0    | 1_6_5   | Monitor systems (E)             | Decide/Observe              |
| 0    | 1_6_6   | Monitor systems (E)             | Troubleshoot                |
| 0.15 | 1_6_7   | Monitor systems (E)             | Monitor Acft performance    |
| 0    | 1_6_8   | Monitor systems (E)             | Routing                     |
| 0.15 | 1_6_9   | Monitor systems (E)             | Monitor system health       |
| 0    | 1_6_999 | Monitor systems (E)             | Report problem              |
| 0    | 1_7_0   | Listen to Radios (All)          | START                       |
| 0.05 | 1_7_2   | Listen to Radios (All)          | Listen to Radios (P)        |
| 0.05 | 1_7_3   | Listen to Radios (All)          | Listen to Radios (CP)       |
| 0.05 | 1_7_4   | Listen to Radios (All)          | Listen to Radios (N)        |
| 0.05 | 1_7_5   | Listen to Radios (All)          | Listen to Radios (FE)       |
| 0    | 1_7_999 | Listen to Radios (All)          | END                         |
| 0.05 | 1_9     | Basic Aircraft Control (C-130H) | Listen (P)                  |
| 0    | 1_999   | Basic Aircraft Control (C-130H) | END                         |
| 0    | 2_0     | Basic Aircraft Control (C-130J) | START                       |
| 0    | 2_1_0   | Control the Airplane (P)        | START                       |
| 0    | 2_1_2   | Control the Airplane (P)        | Adjust throttles            |
| 0    | 2_1_3   | Control the Airplane (P)        | Move Rudder Pedals          |
| 0    | 2_1_4   | Control the Airplane (P)        | Move control yoke           |
| 0    | 2_1_5   | Control the Airplane (P)        | Wait                        |
| 0    | 2_1_999 | Control the Airplane (P)        | END                         |



|         |           |                                  |                                 |
|---------|-----------|----------------------------------|---------------------------------|
| 0       | 2_2_0     | Scan for threats (All)           | START                           |
| 0.2     | 2_2_11    | Scan for threats (All)           | Monitor safety of flight (CP)   |
| 0       | 2_2_12    | Scan for threats (All)           | Report threat (CP)              |
| 0       | 2_2_13    | Scan for threats (All)           | Dispense counter- measures (LM) |
| 0       | 2_2_14    | Scan for threats (All)           | Call threat (LM)                |
| 0.15/.2 | 2_2_16    | Scan for threats (All)           | Scan outside (P)                |
| 0.05    | 2_2_18    | Scan for threats (All)           | Listen RWR1                     |
| 0.05    | 2_2_19    | Scan for threats (All)           | Listen RWR                      |
| 0.15/.2 | 2_2_20    | Scan for threats (All)           | Scan outside (CP)               |
| 0       | 2_2_22    | Scan for threats (All)           | Delay                           |
| 0       | 2_2_23    | Scan for threats (All)           | Delay1                          |
| 0       | 2_2_24    | Scan for threats (All)           | Dispense counter- measures (P)  |
| 0       | 2_2_5     | Scan for threats (All)           | Call threat (P)                 |
| 0       | 2_2_6     | Scan for threats (All)           | Scan outside (LM)               |
| 0       | 2_2_7     | Scan for threats (All)           | Dispense counter- measures (CP) |
| 0       | 2_2_8     | Scan for threats (All)           | Maneuver airplane (P)           |
| 0       | 2_2_9     | Scan for threats (All)           | Call threat (CP)                |
| 0       | 2_2_999   | Scan for threats (All)           | END                             |
| 0       | 2_3_0     | Monitor Aircraft Performance (P) | START                           |
| 0       | 2_3_1_0   | Navigate the Airplane (P)        | START Navigating                |
| 0.1     | 2_3_1_2   | Navigate the Airplane (P)        | Read stick diagram              |
| 0.15/.2 | 2_3_1_3   | Navigate the Airplane (P)        | Monitor SCNS Distance to Go     |
| 0.15/.2 | 2_3_1_4   | Navigate the Airplane (P)        | Monitor SCNS Xtrck              |
| 0.15/.2 | 2_3_1_5   | Navigate the Airplane (P)        | Monitor Heading                 |
| 0.15/.2 | 2_3_1_6   | Navigate the Airplane (P)        | Monitor Ground Speed            |
| 0       | 2_3_1_7   | Navigate the Airplane (P)        | Ensure terrain clearance        |
| 0       | 2_3_1_8   | Navigate the Airplane (P)        | Calculate time status           |
| 0       | 2_3_1_9   | Navigate the Airplane (P)        | Routing                         |
| 0       | 2_3_1_999 | Navigate the Airplane (P)        | END                             |
| 0.15/.2 | 2_3_10    | Monitor Aircraft Performance (P) | Monitor Vertical velocity       |
| 0       | 2_3_11    | Monitor Aircraft Performance (P) | Routing                         |
| 0       | 2_3_13    | Monitor Aircraft Performance (P) | Form Routing                    |
| 0       | 2_3_14    | Monitor Aircraft Performance (P) | Autopilot?                      |
| 0       | 2_3_15    | Monitor Aircraft Performance (P) | Delay                           |
| 0       | 2_3_2_0   | Formation Position (P)           | START Formation Flying          |
| 0       | 2_3_2_2   | Formation Position (P)           | Calculate Pursuit Curve         |
| 0       | 2_3_2_3   | Formation Position (P)           | Calculate Closure velocity      |
| 0.15/.2 | 2_3_2_4   | Formation Position (P)           | Monitor SKE in-track distance   |
| 0.15/.2 | 2_3_2_5   | Formation Position (P)           | Monitor Elevation WRT Lead      |
| 0.15/.2 | 2_3_2_6   | Formation Position (P)           | Monitor SKE Xtrack              |
| 0       | 2_3_2_7   | Formation Position (P)           | Routing                         |
| 0       | 2_3_2_999 | Formation Position (P)           | END                             |
| 0       | 2_3_4     | Monitor Aircraft Performance (P) | Nothing                         |
| 0       | 2_3_5     | Monitor Aircraft Performance (P) | Calculate Pilot correction      |
| 0.15/.2 | 2_3_6     | Monitor Aircraft Performance (P) | Monitor pitch                   |
| 0.15/.2 | 2_3_7     | Monitor Aircraft Performance (P) | Monitor airspeed                |
| 0.15/.2 | 2_3_8     | Monitor Aircraft Performance (P) | Monitor bank angle              |
| 0.15/.2 | 2_3_9     | Monitor Aircraft Performance (P) | Monitor altitude                |

|        |           |                                  |                               |
|--------|-----------|----------------------------------|-------------------------------|
| 0      | 2_3_999   | Monitor Aircraft Performance (P) | END                           |
| 0      | 2_4_0     | Pilot Monitoring Duties (CP)     | START                         |
| 0      | 2_4_1_0   | Navigate the Airplane (CP)       | START Navigating              |
| 0.1    | 2_4_1_2   | Navigate the Airplane (CP)       | Read chart                    |
| 0.15/2 | 2_4_1_3   | Navigate the Airplane (CP)       | Monitor Distance to Go        |
| 0.15/2 | 2_4_1_4   | Navigate the Airplane (CP)       | Monitor SCNS Xtrck            |
| 0.15/2 | 2_4_1_5   | Navigate the Airplane (CP)       | Monitor Heading               |
| 0.15/2 | 2_4_1_6   | Navigate the Airplane (CP)       | Monitor Ground Speed          |
| 0      | 2_4_1_7   | Navigate the Airplane (CP)       | Ensure terrain clearance      |
| 0      | 2_4_1_8   | Navigate the Airplane (CP)       | Calculate time status         |
| 0      | 2_4_1_9   | Navigate the Airplane (CP)       | Routing                       |
| 0      | 2_4_1_999 | Navigate the Airplane (CP)       | END                           |
| 0.15/2 | 2_4_10    | Pilot Monitoring Duties (CP)     | Monitor pitch                 |
| 0      | 2_4_12    | Pilot Monitoring Duties (CP)     | Form Routing                  |
| 0      | 2_4_13    | Pilot Monitoring Duties (CP)     | Autopilot?                    |
| 0      | 2_4_14    | Pilot Monitoring Duties (CP)     | Delay                         |
| 0      | 2_4_2_0   | Formation Position (CP)          | START Formation Flying        |
| 0      | 2_4_2_2   | Formation Position (CP)          | Calculate Pursuit Curve       |
| 0      | 2_4_2_3   | Formation Position (CP)          | Calculate Closure velocity    |
| 0.15/2 | 2_4_2_4   | Formation Position (CP)          | Monitor SKE in-track distance |
| 0.15/2 | 2_4_2_5   | Formation Position (CP)          | Monitor Elevation WRT Lead    |
| 0.15/2 | 2_4_2_6   | Formation Position (CP)          | Monitor SKE Xtrack            |
| 0      | 2_4_2_999 | Formation Position (CP)          | END                           |
| 0.15/2 | 2_4_4     | Pilot Monitoring Duties (CP)     | Monitor airspeed              |
| 0.15/2 | 2_4_5     | Pilot Monitoring Duties (CP)     | Monitor bank angle            |
| 0.15/2 | 2_4_6     | Pilot Monitoring Duties (CP)     | Monitor altitude              |
| 0.15/2 | 2_4_7     | Pilot Monitoring Duties (CP)     | Monitor Vertical velocity     |
| 0      | 2_4_8     | Pilot Monitoring Duties (CP)     | Provide Feedback to Pilot     |
| 0.25   | 2_4_9     | Pilot Monitoring Duties (CP)     | Evaluate Aircraft Performance |
| 0      | 2_4_999   | Pilot Monitoring Duties (CP)     | END                           |
| 0      | 2_6_0     | Monitor systems (CP)             | START                         |
| 0      | 2_6_10    | Monitor systems (CP)             | Monitor system health         |
| 0      | 2_6_12    | Monitor systems (CP)             | Delay                         |
| 0.05   | 2_6_3     | Monitor systems (CP)             | Listen (P)                    |
| 0      | 2_6_6     | Monitor systems (CP)             | Decide/Observe                |
| 0      | 2_6_7     | Monitor systems (CP)             | Troubleshoot                  |
| 0      | 2_6_999   | Monitor systems (CP)             | Report problem                |
| 0      | 2_7_0     | Listen to Radios (All)           | START                         |
| 0.05   | 2_7_2     | Listen to Radios (All)           | Listen to Radios (P)          |
| 0.05   | 2_7_3     | Listen to Radios (All)           | Listen to Radios (CP)         |
| 0      | 2_7_999   | Listen to Radios (All)           | END                           |
| 0.05   | 2_9       | Basic Aircraft Control (C-130J)  | Listen (P)                    |
| 0      | 2_999     | Basic Aircraft Control (C-130J)  | END                           |
| 0      | 3_0       | Situation Awareness (C-130J)     | START                         |
| 0      | 3_1_0     | Pilot SA                         | START                         |
| 0      | 3_1_2     | Pilot SA                         | Low SA                        |
| 0      | 3_1_3     | Pilot SA                         | High SA                       |
| 0      | 3_1_4     | Pilot SA                         | Medium SA                     |

|   |         |                              |           |
|---|---------|------------------------------|-----------|
| 0 | 3_1_5   | Pilot SA                     | Delay     |
| 0 | 3_1_999 | Pilot SA                     | END       |
| 0 | 3_2_0   | Copilot SA                   | START     |
| 0 | 3_2_2   | Copilot SA                   | Low SA    |
| 0 | 3_2_3   | Copilot SA                   | High SA   |
| 0 | 3_2_4   | Copilot SA                   | Medium SA |
| 0 | 3_2_5   | Copilot SA                   | Delay     |
| 0 | 3_2_999 | Copilot SA                   | END       |
| 0 | 3_999   | Situation Awareness (C-130J) | END       |
| 0 | 4_0     | Situation Awareness (C-130H) | START     |
| 0 | 4_1_0   | Pilot SA                     | START     |
| 0 | 4_1_2   | Pilot SA                     | Low SA    |
| 0 | 4_1_3   | Pilot SA                     | High SA   |
| 0 | 4_1_4   | Pilot SA                     | Medium SA |
| 0 | 4_1_5   | Pilot SA                     | Delay     |
| 0 | 4_1_999 | Pilot SA                     | END       |
| 0 | 4_2_0   | Copilot SA                   | START     |
| 0 | 4_2_2   | Copilot SA                   | Low SA    |
| 0 | 4_2_3   | Copilot SA                   | High SA   |
| 0 | 4_2_4   | Copilot SA                   | Medium SA |
| 0 | 4_2_5   | Copilot SA                   | Delay     |
| 0 | 4_2_999 | Copilot SA                   | END       |
| 0 | 4_3_0   | Navigator SA                 | START     |
| 0 | 4_3_2   | Navigator SA                 | Low SA    |
| 0 | 4_3_3   | Navigator SA                 | High SA   |
| 0 | 4_3_4   | Navigator SA                 | Medium SA |
| 0 | 4_3_5   | Navigator SA                 | Delay     |
| 0 | 4_3_999 | Navigator SA                 | END       |
| 0 | 4_4_0   | Engineer SA                  | START     |
| 0 | 4_4_2   | Engineer SA                  | Low SA    |
| 0 | 4_4_3   | Engineer SA                  | High SA   |
| 0 | 4_4_4   | Engineer SA                  | Medium SA |
| 0 | 4_4_5   | Engineer SA                  | Delay     |
| 0 | 4_4_999 | Engineer SA                  | END       |
| 0 | 4_999   | Situation Awareness (C-130H) | END       |
| 0 | 999     | (Root)                       | Model END |

**Table 29: Task Listing and Tactical SA Values for SKE Formation Airdrop (C-130H)**

| Tac SA Value | Task ID   | Function                | Task                              |
|--------------|-----------|-------------------------|-----------------------------------|
| 0            | 0         | (Root)                  | Model START                       |
| 0            | 19_0      | Preslowdown Checklist   | START                             |
| 0            | 19_1      | Preslowdown Checklist   | Crew, 20 min advisory (N)         |
| 0            | 19_10     | Preslowdown Checklist   | Load is off headset (LM)          |
| 0            | 19_11     | Preslowdown Checklist   | Brief Airdrop card (CP)           |
| 0            | 19_12     | Preslowdown Checklist   | Reviewed, Pilot (P)               |
| 0            | 19_13     | Preslowdown Checklist   | Copilot (CP)                      |
| 0            | 19_14     | Preslowdown Checklist   | Nav (N)                           |
| 0            | 19_15     | Preslowdown Checklist   | set radar altimeter (P)           |
| 0            | 19_16     | Preslowdown Checklist   | Set Radar altimeter (N)           |
| 0            | 19_17     | Preslowdown Checklist   | Radar altimeter (E)               |
| 0.05         | 19_18     | Preslowdown Checklist   | Set xxx, Pilot                    |
| 0            | 19_19     | Preslowdown Checklist   | Set xxx, Nav (N)                  |
| 0            | 19_2      | Preslowdown Checklist   | Post drop information on card (N) |
| 0            | 19_20_0   | Depressurize (E)        | Is altitude appropriate?          |
| 0            | 19_20_2   | Depressurize (E)        | Set cabin rate knob               |
| 0            | 19_20_3   | Depressurize (E)        | Set pressure controller           |
| 0            | 19_20_4   | Depressurize (E)        | set air cond master switch        |
| 0            | 19_20_999 | Depressurize (E)        | Cabin diff press =0               |
| 0            | 19_21     | Preslowdown Checklist   | Red Light (E)                     |
| 0            | 19_22     | Preslowdown Checklist   | Turn on Troop Caution (CP)        |
| 0            | 19_23     | Preslowdown Checklist   | On (CP)                           |
| 0            | 19_24     | Preslowdown Checklist   | (Jumpers stand)                   |
| 0            | 19_25     | Preslowdown Checklist   | Drift and Altimeter setting (E)   |
| 0            | 19_26     | Preslowdown Checklist   | Relayed xx L/R (N)                |
| 0            | 19_27     | Preslowdown Checklist   | Compute SKE run-in XTRK (CP)      |
| 0            | 19_28     | Preslowdown Checklist   | Computer Airdrop Information (E)  |
| 0.05         | 19_29     | Preslowdown Checklist   | Pass Airdrop drift FCI            |
| 0            | 19_3      | Preslowdown Checklist   | Preslowdown Checklist (N)         |
| 0.05         | 19_30     | Preslowdown Checklist   | Relay Altimeter FCI               |
| 0.05         | 19_31     | Preslowdown Checklist   | Relay drift (N)                   |
| 0.05         | 19_32     | Preslowdown Checklist   | Relay altimeter (N)               |
| 0            | 19_33_0   | Check computer info (N) | START                             |
| 0            | 19_33_1   | Check computer info (N) | Enter/verify TOT                  |
| 0            | 19_33_2   | Check computer info (N) | Program ballistic winds           |
| 0            | 19_33_3   | Check computer info (N) | Verify Ballistic data             |
| 0            | 19_33_4   | Check computer info (N) | Confirm drop reference            |
| 0            | 19_33_5   | Check computer info (N) | Set Altitude gate                 |
| 0            | 19_33_6   | Check computer info (N) | Program wind factor               |
| 0            | 19_33_999 | Check computer info (N) | Checked (N)                       |
| 0            | 19_34     | Preslowdown Checklist   | SKE secondary control panel (E)   |
| 0            | 19_35     | Preslowdown Checklist   | Reset SKE XTRK (CP)               |
| 0.05         | 19_36     | Preslowdown Checklist   | Set xxx L/R (CP)                  |

|      |        |                       |                                      |
|------|--------|-----------------------|--------------------------------------|
| 0    | 19_37  | Preslowdown Checklist | Adjust lateral position              |
| 0    | 19_38  | Preslowdown Checklist | AD/TJ switch (E)                     |
| 0.1  | 19_39  | Preslowdown Checklist | Verify switch (CP)                   |
| 0.05 | 19_4   | Preslowdown Checklist | Crew, 10 min advisory (N)            |
| 0.05 | 19_40  | Preslowdown Checklist | AD/TJ Manual (CP)                    |
| 0    | 19_41  | Preslowdown Checklist | Preslowdown checks (E)               |
| 0.05 | 19_42  | Preslowdown Checklist | Load is back up (LM)                 |
| 0.05 | 19_43  | Preslowdown Checklist | Complete, Load (LM)                  |
| 0    | 19_44  | Preslowdown Checklist | Acknowledged, Load (LM)1             |
| 0.05 | 19_46  | Preslowdown Checklist | Listen to brief (P)                  |
| 0.05 | 19_47  | Preslowdown Checklist | Listen to brief (N)                  |
| 0.05 | 19_48  | Preslowdown Checklist | Listen to brief (E)                  |
| 0    | 19_5   | Preslowdown Checklist | Personnel Checklist (P)              |
| 0    | 19_6   | Preslowdown Checklist | Open checklist (E)                   |
| 0    | 19_7   | Preslowdown Checklist | Post stall speeds on drop card (E)   |
| 0    | 19_8   | Preslowdown Checklist | Acknowledged, Load (LM)              |
| 0    | 19_9   | Preslowdown Checklist | Slowdown, drop zone , and escape (E) |
| 0.05 | 19_999 | Preslowdown Checklist | Complete, Engineer (E)               |
| 0    | 20_0   | Formation descent     | Approaching top of descent           |
| 0.05 | 20_1   | Formation descent     | Pass new altitude (FCI)              |
| 0.05 | 20_10  | Formation descent     | Next altitude xxxx (N)               |
| 0.05 | 20_11  | Formation descent     | Relay 30 sec FCI (N)                 |
| 0.05 | 20_12  | Formation descent     | 5 sec (N)                            |
| 0.1  | 20_13  | Formation descent     | Verify clear of terrain              |
| 0.05 | 20_14  | Formation descent     | Clear of terrain (N)                 |
| 0.05 | 20_15  | Formation descent     | Relay 5 sec FCI (P)                  |
| 0.05 | 20_16  | Formation descent     | Passed                               |
| 0.05 | 20_17  | Formation descent     | Relay "E" FCI (P)                    |
| 0.05 | 20_18  | Formation descent     | Passed (P)1                          |
| 0.05 | 20_2   | Formation descent     | Pass 30 sec FCI                      |
| 0    | 20_20  | Formation descent     | Descend 1000 ft/min                  |
| 0    | 20_21  | Formation descent     | Level off (P)                        |
| 0.05 | 20_24  | Formation descent     | 1000 above (CP)                      |
| 0.05 | 20_3   | Formation descent     | Pass 5 sec FCI                       |
| 0.05 | 20_4   | Formation descent     | Pass Execute FCI                     |
| 0    | 20_5   | Formation descent     | Level out                            |
| 0.05 | 20_6   | Formation descent     | Lead is level @ xxxx                 |
| 0.05 | 20_7   | Formation descent     | 2 is level                           |
| 0.05 | 20_8   | Formation descent     | Relay Altitude (FCI)                 |
| 0.05 | 20_9   | Formation descent     | Lead's 30 sec downprep (N)           |
| 0    | 20_999 | Formation descent     | 3 is level                           |
| 0    | 21_0   | Formation turn at IP  | Approaching turn point               |
| 0.05 | 21_1   | Formation turn at IP  | Pass TAS (FCI)                       |
| 0.05 | 21_10  | Formation turn at IP  | Pass 5 sec (FCI)                     |
| 0.05 | 21_11  | Formation turn at IP  | Pass execute (FCI)                   |
| 0.05 | 21_12  | Formation turn at IP  | 30 sec, passed (N)                   |
| 0.05 | 21_13  | Formation turn at IP  | Relay FCI (N)                        |
| 0    | 21_14  | Formation turn at IP  | Compute time delay (N)               |

|      |           |                      |                                                 |
|------|-----------|----------------------|-------------------------------------------------|
| 0.05 | 21_15     | Formation turn at IP | State time delay (N)                            |
| 0.15 | 21_16     | Formation turn at IP | Read in-track dist (CP)                         |
| 0.05 | 21_17     | Formation turn at IP | State in track dist (CP)                        |
| 0    | 21_19     | Formation turn at IP | Compute PPI offset (CP)                         |
| 0.05 | 21_2      | Formation turn at IP | Pass present hdg (FCI)                          |
| 0.15 | 21_20     | Formation turn at IP | Reset PPI ref line (CP)                         |
| 0.05 | 21_21     | Formation turn at IP | 5 sec (N)                                       |
| 0.05 | 21_22     | Formation turn at IP | Relay FCI (P)                                   |
| 0.05 | 21_23     | Formation turn at IP | Passed (P)                                      |
| 0.05 | 21_24     | Formation turn at IP | begin turn (N)                                  |
| 0.05 | 21_25     | Formation turn at IP | Relay "E" FCI (P)                               |
| 0.05 | 21_26     | Formation turn at IP | Passed (P)1                                     |
| 0    | 21_27     | Formation turn at IP | begin turn (P)                                  |
| 0.1  | 21_28     | Formation turn at IP | Begin turn (Lead)                               |
| 0.1  | 21_29     | Formation turn at IP | Roll out (Lead)                                 |
|      |           |                      |                                                 |
| 0.05 | 21_3      | Formation turn at IP | Pass next hdg (FCI)                             |
| 0.15 | 21_30     | Formation turn at IP | Observe Lead's turn (CP)                        |
| 0.05 | 21_31     | Formation turn at IP | Lead is in the turn (CP)                        |
| 0.05 | 21_32     | Formation turn at IP | Provide trend info (CP)                         |
| 0.05 | 21_4      | Formation turn at IP | Lead is loading computer turn (N)               |
| 0.05 | 21_5      | Formation turn at IP | Relay TAS (N)                                   |
| 0.05 | 21_6      | Formation turn at IP | Relay present hdg (N)                           |
| 0.05 | 21_7      | Formation turn at IP | Relay next hdg (N)                              |
| 0.05 | 21_8      | Formation turn at IP | Box is loaded (N)                               |
| 0.05 | 21_9      | Formation turn at IP | Pass 30 sec (FCI)                               |
| 0    | 21_999    | Formation turn at IP | Roll out (P)                                    |
| 0    | 22_0      | Slowdown checklist   | Approach SD point                               |
| 0.05 | 22_1      | Slowdown checklist   | Pass 30 sec SD (FCI)                            |
| 0.05 | 22_10     | Slowdown checklist   | Passed (P)                                      |
| 0.05 | 22_11     | Slowdown checklist   | Slowdown, slowdown, now (N)                     |
| 0.05 | 22_12     | Slowdown checklist   | Relay "E" FCI (P)                               |
| 0.05 | 22_13     | Slowdown checklist   | Flaps 50, on speed (P)                          |
| 0    | 22_14     | Slowdown checklist   | Retard throttles (P)                            |
| 0.05 | 22_15_0   | Move flaps 50% (CP)  | Flaps tracking 50%, on speed (CP)               |
| 0    | 22_15_10  | Move flaps 50% (CP)  | Move flaps to 50% (CP)                          |
| 0.15 | 22_15_11  | Move flaps 50% (CP)  | Observe rudder hydraulic pressure increase (CP) |
| 0.15 | 22_15_12  | Move flaps 50% (CP)  | Observe rudder hydraulic pressure increase (E)  |
| 0.15 | 22_15_3   | Move flaps 50% (CP)  | Observe <210 KIAS (CP)                          |
| 0    | 22_15_4   | Move flaps 50% (CP)  | Move flaps to 20% (CP)                          |
| 0.15 | 22_15_5   | Move flaps 50% (CP)  | Observe <200 KIAS (CP)                          |
| 0    | 22_15_6   | Move flaps 50% (CP)  | Move flaps to 30% (CP)                          |
| 0.15 | 22_15_7   | Move flaps 50% (CP)  | Observe <190 KIAS (CP)                          |
| 0    | 22_15_8   | Move flaps 50% (CP)  | Move flaps to 40% (CP)                          |
| 0.15 | 22_15_9   | Move flaps 50% (CP)  | Observe <180 KIAS (CP)                          |
| 0    | 22_15_999 | Move flaps 50% (CP)  | END                                             |

|      |           |                                        |                                    |
|------|-----------|----------------------------------------|------------------------------------|
| 0    | 22_16     | Slowdown checklist                     | Silence warning horn (CP)          |
| 0    | 22_17     | Slowdown checklist                     | Slow to 140 KIAS (P)               |
| 0.15 | 22_19     | Slowdown checklist                     | Observe <150 KIAS (E)              |
| 0.05 | 22_2      | Slowdown checklist                     | 30 sec to slowdown (N)             |
| 0    | 22_20     | Slowdown checklist                     | Air deflector doors (E)            |
| 0    | 22_21     | Slowdown checklist                     | throw switch (CP)                  |
| 0.05 | 22_22     | Slowdown checklist                     | observe light (CP)                 |
| 0.05 | 22_23     | Slowdown checklist                     | Indicate open (CP)                 |
| 0    | 22_24     | Slowdown checklist                     | Open paratroop door (LM)           |
| 0    | 22_25     | Slowdown checklist                     | Drift and wind information (E)     |
| 0    | 22_26     | Slowdown checklist                     | Add power to maintain 140 KIAS (P) |
| 0    | 22_27     | Slowdown checklist                     | Contact Drop zone                  |
| 0.05 | 22_28     | Slowdown checklist                     | Recieve DZ winds                   |
| 0.05 | 22_29     | Slowdown checklist                     | Pass updated drift data (FCI)      |
| 0.05 | 22_3      | Slowdown checklist                     | Pass 5 sec SD (FCI)                |
| 0    | 22_30     | Slowdown checklist                     | Lead is 140 KIAS                   |
| 0.15 | 22_31     | Slowdown checklist                     | Arrive @ earliest descent point    |
| 0    | 22_32     | Slowdown checklist                     | IFF/TCAS (E)                       |
| 0    | 22_33     | Slowdown checklist                     | Flaps (E)                          |
| 0.05 | 22_34     | Slowdown checklist                     | 50% (CP)                           |
| 0.1  | 22_35     | Slowdown checklist                     | verify STBY (CP)                   |
| 0.05 | 22_36     | Slowdown checklist                     | Set, standby (CP)                  |
| 0.05 | 22_37     | Slowdown checklist                     | Pass 5 sec (FCI)                   |
| 0.05 | 22_38     | Slowdown checklist                     | Pass "E" (FCI)                     |
| 0    | 22_39_0   | Compute independent ballistic info (N) | Update CARP (N)                    |
| 0.1  | 22_39_1   | Compute independent ballistic info (N) | Verbalize new CARP (N)             |
| 0.05 | 22_39_2   | Compute independent ballistic info (N) | Repeat new CARP (P)                |
| 0    | 22_39_3   | Compute independent ballistic info (N) | Compute new GS (N)                 |
| 0    | 22_39_4   | Compute independent ballistic info (N) | Program new CARP in SCNS (N)       |
| 0    | 22_39_5   | Compute independent ballistic info (N) | Compute in-track timing (N)        |
| 0.05 | 22_39_6   | Compute independent ballistic info (N) | Relay drift FCI (N)                |
| 0    | 22_39_999 | Compute independent ballistic info (N) | END                                |
| 0.05 | 22_4      | Slowdown checklist                     | Relay 30 sec FCI (N)               |
| 0.05 | 22_40     | Slowdown checklist                     | Relayed (N)                        |
| 0.05 | 22_41     | Slowdown checklist                     | Complete, Load (LM)                |
| 0    | 22_42     | Slowdown checklist                     | Lead descends to drop altitude     |
| 0    | 22_43     | Slowdown checklist                     | Lead slows to 130 KIAS             |
| 0.05 | 22_44     | Slowdown checklist                     | Lead's down prep (N)               |
| 0.05 | 22_47     | Slowdown checklist                     | Relay 5 sec FCI                    |
| 0.05 | 22_48     | Slowdown checklist                     | relay FCI (P)                      |
| 0.05 | 22_49     | Slowdown checklist                     | descend now (N)                    |
| 0.05 | 22_5      | Slowdown checklist                     | Passed (N)                         |
| 0.05 | 22_51     | Slowdown checklist                     | confirm clear of terrain (N)       |
| 0    | 22_52     | Slowdown checklist                     | Retard throttles (P)1              |
| 0    | 22_53     | Slowdown checklist                     | Descend to drop alt +50ft (P)      |

|      |         |                         |                                     |
|------|---------|-------------------------|-------------------------------------|
| 0    | 22_54   | Slowdown checklist      | Slow to 130 KIAS                    |
| 0    | 22_55   | Slowdown checklist      | Adjust formation position (P)       |
| 0    | 22_56   | Slowdown checklist      | stop descent /level (P)             |
| 0    | 22_57   | Slowdown checklist      | Slowdown Checks (E)                 |
| 0.05 | 22_58   | Slowdown checklist      | Complete, Eng (E)                   |
| 0    | 22_59   | Slowdown checklist      | Pull hot mike knob (P)              |
| 0.05 | 22_6    | Slowdown checklist      | Pass execute (FCI)                  |
| 0    | 22_60   | Slowdown checklist      | Pull hot mike knob (CP)             |
| 0.05 | 22_61   | Slowdown checklist      | Pilot is hot mike (P)               |
| 0.05 | 22_62   | Slowdown checklist      | Copilot is hot mike (CP)            |
| 0.1  | 22_63   | Slowdown checklist      | Clear to drop (DZ)                  |
| 0.05 | 22_64   | Slowdown checklist      | Acknowledge (P)                     |
| 0.05 | 22_65   | Slowdown checklist      | Acknowledge (CP)                    |
| 0.05 | 22_66   | Slowdown checklist      | Acknowledge (N)                     |
| 0.05 | 22_67   | Slowdown checklist      | Acknowledge (E)                     |
| 0.05 | 22_7    | Slowdown checklist      | [callsign] slowdown, slow down, now |
| 0.05 | 22_8    | Slowdown checklist      | 5 sec to slowdown (N)               |
| 0.05 | 22_9    | Slowdown checklist      | Relay 5 sec FCI (P)                 |
| 0    | 22_999  | Slowdown checklist      | END                                 |
| 0    | 24_0    | Release Point Checklist | START                               |
| 0.05 | 24_10   | Release Point Checklist | No drop (P)                         |
| 0.05 | 24_11   | Release Point Checklist | No drop (CP)                        |
| 0.05 | 24_12   | Release Point Checklist | No drop (N)                         |
| 0.05 | 24_13   | Release Point Checklist | No drop (E)                         |
| 0.2  | 24_14   | Release Point Checklist | Aircraft safe to drop? (P)          |
| 0.2  | 24_15   | Release Point Checklist | Aircraft safe to drop? (CP)         |
| 0.2  | 24_16   | Release Point Checklist | Aircraft safe to drop? (E)          |
| 0.1  | 24_17   | Release Point Checklist | Evaluate SCNS time (N)              |
| 0.05 | 24_18   | Release Point Checklist | Timing is good (N)                  |
| 0.1  | 24_19   | Release Point Checklist | Evaluate SCNS xtrk (P)              |
| 0.05 | 24_2    | Release Point Checklist | 1 min advisory (N)                  |
| 0.05 | 24_20   | Release Point Checklist | SCNS is good (P)                    |
| 0.2  | 24_21   | Release Point Checklist | Aircraft safe to drop? (N)          |
| 0.1  | 24_22   | Release Point Checklist | Evaluate formation position (CP)    |
| 0.05 | 24_23   | Release Point Checklist | TWS is good (CP)                    |
| 0.05 | 24_24   | Release Point Checklist | 5 sec (FCI)                         |
| 0.15 | 24_25   | Release Point Checklist | Observe SCNS time (N)               |
| 0.05 | 24_26   | Release Point Checklist | 5 sec (N)                           |
| 0.05 | 24_27   | Release Point Checklist | Relay 5 sec FCI (P)                 |
| 0.05 | 24_28   | Release Point Checklist | Passed (P)1                         |
| 0.05 | 24_29   | Release Point Checklist | Execute (FCI)                       |
| 0.05 | 24_3    | Release Point Checklist | Relay 1 min FCI (P)                 |
| 0.1  | 24_30   | Release Point Checklist | Observe GL time (N)                 |
| 0.05 | 24_31   | Release Point Checklist | Green Light! (N)                    |
| 0.05 | 24_32   | Release Point Checklist | Relay "E" FCI (P)                   |
| 0    | 24_33   | Release Point Checklist | turn on light (CP)                  |
| 0.05 | 24_34   | Release Point Checklist | On! (CP)                            |
| 0    | 24_35_0 | Fly to CARP (P)         | START                               |



|      |           |                              |                                    |
|------|-----------|------------------------------|------------------------------------|
| 0.15 | 24_35_1   | Fly to CARP (P)              | maintain SKE xtrk position (P)     |
| 0.15 | 24_35_2   | Fly to CARP (P)              | minimize SCNS xtrk (P)             |
| 0.1  | 24_35_3   | Fly to CARP (P)              | minimize TKE (P)                   |
| 0.15 | 24_35_4   | Fly to CARP (P)              | maintain element drop altitude (P) |
| 0.15 | 24_35_5   | Fly to CARP (P)              | maintain drop airspeed (P)         |
| 0.15 | 24_35_6   | Fly to CARP (P)              | maintain SKE in-track spacing (P)  |
| 0    | 24_35_999 | Fly to CARP (P)              | END                                |
| 0.05 | 24_36     | Release Point Checklist      | Acknowledged, Copilot (CP)1        |
| 0.05 | 24_37     | Release Point Checklist      | Acknowledged, Load (LM)1           |
| 0    | 24_38     | Release Point Checklist      | Formation cleared to drop?         |
| 0    | 24_39     | Release Point Checklist      | Formation safe to drop?            |
| 0.05 | 24_4      | Release Point Checklist      | Passed (P)                         |
| 0.05 | 24_40     | Release Point Checklist      | Pass no drop (FCI)                 |
| 0.05 | 24_41     | Release Point Checklist      | Relay FCI (N))                     |
| 0.05 | 24_42     | Release Point Checklist      | xxxx, no drop, ack                 |
| 0.05 | 24_43     | Release Point Checklist      |                                    |
| 0    | 24_44     | Release Point Checklist      | 3 (P)                              |
| 0    | 24_45     | Release Point Checklist      | Jumpers exit                       |
| 0.05 | 24_46_0   | Drop Malfunction             | Pilot, malfunction (LM)            |
| 0.05 | 24_46_1   | Drop Malfunction             | Brief description (LM)             |
| 0    | 24_46_2   | Drop Malfunction             | Perform emergency actions (LM)     |
| 0    | 24_46_3   | Drop Malfunction             | Perform emergency actions (P)      |
| 0    | 24_46_4   | Drop Malfunction             | Perform emergency actions (CP)     |
| 0    | 24_46_5   | Drop Malfunction             | Perform emergency actions (N)      |
| 0    | 24_46_6   | Drop Malfunction             | Perform emergency actions (FE)     |
| 0    | 24_46_999 | Drop Malfunction             | END                                |
| 0    | 24_47     | Release Point Checklist      | Time for usable DZ (N)             |
| 0.05 | 24_48     | Release Point Checklist      | load clear (LM)                    |
| 0.05 | 24_5      | Release Point Checklist      | Acknowledged, Load (LM)            |
| 0.05 | 24_50     | Release Point Checklist      | Red light (N)                      |
| 0    | 24_51     | Release Point Checklist      | turn off light (CP)                |
| 0.05 | 24_52     | Release Point Checklist      | on (CP)                            |
| 0    | 24_53     | Release Point Checklist      | Time for 60 sec                    |
| 0    | 24_54     | Release Point Checklist      | Nothing                            |
| 0.05 | 24_7      | Release Point Checklist      | 1 min warn (FCI)                   |
| 0    | 24_8      | Release Point Checklist      | Are jumpers safe?                  |
| 0.05 | 24_9      | Release Point Checklist      | No drop (LM)                       |
| 0    | 24_999    | Release Point Checklist      | END                                |
| 0    | 25_0      | Completion of Drop checklist | START                              |
| 0    | 25_1      | Completion of Drop checklist | Paratroop doors (E)                |
| 0    | 25_10     | Completion of Drop checklist | Adjust formation postn (P)         |
| 0.05 | 25_11     | Completion of Drop checklist | Accelerate, Accelerate now (N)     |
| 0    | 25_12     | Completion of Drop checklist | set AC master switch (E)           |
| 0    | 25_13     | Completion of Drop checklist | Set cabin px controller (E)        |
| 0    | 25_14     | Completion of Drop checklist | set rate knob (E)                  |
| 0    | 25_15     | Completion of Drop checklist | add throttles (P)                  |
| 0.05 | 25_16     | Completion of Drop checklist | Pass "E" FCI (P)                   |
| 0.05 | 25_17     | Completion of Drop checklist | Flaps up (P)                       |

2

|      |       |                              |                                  |
|------|-------|------------------------------|----------------------------------|
| 0.05 | 25_18 | Completion of Drop checklist | Flaps tracking up (CP)           |
| 0    | 25_19 | Completion of Drop checklist | Move flap lever (CP)             |
| 0    | 25_2  | Completion of Drop checklist | Close doors (LM)                 |
| 0    | 25_20 | Completion of Drop checklist | Flaps (E)                        |
| 0.05 | 25_21 | Completion of Drop checklist | up (CP)                          |
| 0.15 | 25_22 | Completion of Drop checklist | Observe flaps 0% (E)             |
| 0    | 25_23 | Completion of Drop checklist | IFF/TCAS (E)                     |
| 0.15 | 25_24 | Completion of Drop checklist | verify stdby (CP)                |
| 0.05 | 25_25 | Completion of Drop checklist | Set, STBY (CP)                   |
| 0    | 25_26 | Completion of Drop checklist | Radar altimeter (E)              |
| 0    | 25_27 | Completion of Drop checklist | radial radar alt (P)             |
| 0    | 25_28 | Completion of Drop checklist | radial radar alt (N)             |
| 0.05 | 25_29 | Completion of Drop checklist | Set, xxx, pilot (P)              |
| 0.05 | 25_3  | Completion of Drop checklist | Closed and locked (LM)           |
| 0.05 | 25_30 | Completion of Drop checklist | Set xxx Nav (N)                  |
| 0    | 25_31 | Completion of Drop checklist | AD/TJ swtich (E)                 |
| 0.1  | 25_32 | Completion of Drop checklist | verify MAN (CP)                  |
| 0.05 | 25_33 | Completion of Drop checklist | AD/TJ manual (CP)                |
| 0    | 25_34 | Completion of Drop checklist | Red light (E)                    |
| 0    | 25_35 | Completion of Drop checklist | switch off (CP)                  |
| 0.05 | 25_36 | Completion of Drop checklist | off (CP)                         |
| 0    | 25_37 | Completion of Drop checklist | Drop checks (E)                  |
| 0.05 | 25_38 | Completion of Drop checklist | Complete, Load (LM)              |
| 0.05 | 25_39 | Completion of Drop checklist | Complete, Engineer (E)           |
| 0    | 25_4  | Completion of Drop checklist | close AD switch (CP)             |
| 0.05 | 25_40 | Completion of Drop checklist | Pass 5 sec FCI                   |
| 0.05 | 25_41 | Completion of Drop checklist | Lead's 5 sec turn prep (N)       |
| 0    | 25_42 | Completion of Drop checklist | Calculate time delay (N)         |
| 0.05 | 25_44 | Completion of Drop checklist | Pass execute FCI                 |
| 0.05 | 25_45 | Completion of Drop checklist | state in- track position (CP)    |
| 0.15 | 25_46 | Completion of Drop checklist | set PPI line (CP)                |
| 0.05 | 25_47 | Completion of Drop checklist | Relay 5 sec FCI (P)              |
| 0.05 | 25_48 | Completion of Drop checklist | Relay "E" FCI (P)                |
| 0.05 | 25_49 | Completion of Drop checklist | L/R turn xxx (N)                 |
| 0.05 | 25_5  | Completion of Drop checklist | indicate closed (CP)             |
| 0.15 | 25_50 | Completion of Drop checklist | monitor lead's position (CP)     |
| 0    | 25_51 | Completion of Drop checklist | advance throttles (P)            |
| 0    | 25_52 | Completion of Drop checklist | Accelerate 140 KIAS (P)          |
| 0    | 25_53 | Completion of Drop checklist | Climb 1000 ft/min (P)            |
| 0    | 25_54 | Completion of Drop checklist | Level @ new alt (P)              |
| 0    | 25_55 | Completion of Drop checklist | Turn to escape heading (P)       |
| 0.05 | 25_56 | Completion of Drop checklist | provide trend info to Pilot (CP) |
| 0    | 25_57 | Completion of Drop checklist | Roll out on course (P)           |
| 0.05 | 25_58 | Completion of Drop checklist | Lead is lvl xxxx                 |
| 0.05 | 25_59 | Completion of Drop checklist | 2 is level                       |
| 0    | 25_6  | Completion of Drop checklist | air deflector doors (E)          |
| 0    | 25_60 | Completion of Drop checklist | 3 is level (P)                   |
| 0.15 | 25_61 | Completion of Drop checklist | Pass new IAS (FCI)               |

|          |       |                              |                                                   |
|----------|-------|------------------------------|---------------------------------------------------|
| 0.05     | 25_62 | Completion of Drop checklist | Relay IAS FCI (N)                                 |
| 0.05     | 25_63 | Completion of Drop checklist | New speed xxx (N)                                 |
| 0.05     | 25_64 | Completion of Drop checklist | Pass 30 sec FCI)1                                 |
| 0.05     | 25_65 | Completion of Drop checklist | Relay 30 sec FCI (N)                              |
| 0.05     | 25_66 | Completion of Drop checklist | 30 sec prep, Passed (N)                           |
| 0.05     | 25_67 | Completion of Drop checklist | Pass 5 sec FCI)                                   |
| 0.05     | 25_68 | Completion of Drop checklist | 5 sec (N)                                         |
| 0.05     | 25_69 | Completion of Drop checklist | Relay 5 sec FCI (P)                               |
| 0        | 25_7  | Completion of Drop checklist | SKE 2nd cntrl panel (E)                           |
| 0.05     | 25_70 | Completion of Drop checklist | passed (P)                                        |
| 0.05     | 25_71 | Completion of Drop checklist | Pass "E" (FCI)1                                   |
| 0        | 25_72 | Completion of Drop checklist | accelerate                                        |
| 0        | 25_73 | Completion of Drop checklist | adjust throttles (P)                              |
| 0        | 25_74 | Completion of Drop checklist | Adjust formation postn (P)1                       |
| 0        | 25_8  | Completion of Drop checklist | reset SKE panel (CP)<br>Set, (state setting) (CP) |
|          |       |                              | 25_999 Completion of Drop checklist END           |
|          |       |                              | 26_0 AWADS updates (N) START                      |
|          |       |                              | 26_1 AWADS updates (N) AWADS Update 1             |
|          |       |                              | 26_2 AWADS updates (N) AWADS Update 2             |
|          |       |                              | 26_3 AWADS updates (N) AWADS Update 3             |
|          |       |                              | 26_999 AWADS updates (N) END                      |
|          |       |                              | 44_0 Freq change START                            |
|          |       |                              | 44_1 Freq change Direct freq change1              |
|          |       |                              | 44_2 Freq change Acknowledge (P)2                 |
|          |       |                              | 44_3 Freq change Change radios (CP)1              |
|          |       |                              | 44_4 Freq change Check in1                        |
|          |       |                              | 44_5 Freq change Acknowledge (P)3                 |
|          |       |                              | 44_999 Freq change END                            |
|          |       |                              | 45_0 Freq change1 START                           |
|          |       |                              | 45_10 Freq change1 Copy drop scores (N)           |
|          |       |                              | 45_3 Freq change1 Obtain drop scores              |
|          |       |                              | 45_4 Freq change1 Direct freq change              |
|          |       |                              | 45_5 Freq change1 Acknowledge (P)                 |
|          |       |                              | 45_6 Freq change1 Change radios (CP)              |
|          |       |                              | 45_7 Freq change1 Check in                        |
|          |       |                              | 45_8 Freq change1 Acknowledge (P)1                |
|          |       |                              | 45_9 Freq change1 Copy drop scores (CP)           |
| variable | 25_9  | Completion of Drop checklist | 45_999 Freq change1 END                           |

**Table 30: Task Listing and Tactical SA Values for SKE Formation Airdrop scenario (C-130J)**

| <b>Tac SA Value</b> | <b>Task ID</b> | <b>Function</b>            | <b>Task</b>                              |
|---------------------|----------------|----------------------------|------------------------------------------|
| 0                   | 0              | (Root)                     | Model START                              |
| 0                   | 19_0           | Drop Preparation Checklist | START                                    |
| 0                   | 19_1           | Drop Preparation Checklist | Crew, 20 min advisory (CP)               |
| 0                   | 19_10          | Drop Preparation Checklist | Load is off headset (LM)                 |
| 0                   | 19_11          | Drop Preparation Checklist | Brief Airdrop card (CP)                  |
| 0                   | 19_13          | Drop Preparation Checklist | Complete (CP)                            |
| 0                   | 19_15          | Drop Preparation Checklist | set radar altimeter (P)                  |
| 0                   | 19_16          | Drop Preparation Checklist | Set Radar altimeter (CP)                 |
| 0                   | 19_17          | Drop Preparation Checklist | Altimeters (CP)                          |
| 0.05                | 19_18          | Drop Preparation Checklist | Set xxx, Pilot                           |
| 0                   | 19_19          | Drop Preparation Checklist | Set xxx, Copilot (N)                     |
| 0                   | 19_20_0        | Depressurize (CP)          | Is altitude appropriate?                 |
| 0                   | 19_20_4        | Depressurize (CP)          | set air cond master switch               |
| 0                   | 19_20_999      | Depressurize (CP)          | END                                      |
| 0                   | 19_22          | Drop Preparation Checklist | Turn on Troop Caution (CP)               |
| 0                   | 19_23          | Drop Preparation Checklist | Red Light On (CP)                        |
| 0                   | 19_24          | Drop Preparation Checklist | (Jumpers stand)                          |
| 0                   | 19_26          | Drop Preparation Checklist | Relayed xx L/R (CP)                      |
| 0                   | 19_28          | Drop Preparation Checklist | Cabin Depressurized (CP)                 |
| 0.05                | 19_29          | Drop Preparation Checklist | Pass Airdrop drift FCI                   |
| 0                   | 19_3           | Drop Preparation Checklist | Drop Preperation Personnel Checklist (P) |
| 0.05                | 19_30          | Drop Preparation Checklist | Relay Altimeter FCI                      |
| 0                   | 19_31          | Drop Preparation Checklist | Input drift (CP)                         |

|      |           |                             |                                  |
|------|-----------|-----------------------------|----------------------------------|
| 0.05 | 19_32     | Drop Preparation Checklist  | Relay altimeter (CP)             |
| 0    | 19_33_0   | Check CNI-MU CARP data (CP) | START                            |
| 0    | 19_33_1   | Check CNI-MU CARP data (CP) | Verify CARP Page 1               |
| 0    | 19_33_2   | Check CNI-MU CARP data (CP) | Verify CARP Page 2               |
| 0    | 19_33_3   | Check CNI-MU CARP data (CP) | Verify CARP Page 3               |
| 0    | 19_33_4   | Check CNI-MU CARP data (CP) | Verify CARP Page 4               |
| 0    | 19_33_5   | Check CNI-MU CARP data (CP) | Verify CARP Page 5               |
| 0    | 19_33_999 | Check CNI-MU CARP data (CP) | END                              |
| 0.05 | 19_39     | Drop Preparation Checklist  | Computer drop switch-Manual (CP) |
| 0.05 | 19_4      | Drop Preparation Checklist  | Crew, 10 min advisory (CP)       |
| 0    | 19_41     | Drop Preparation Checklist  | Drop preparation checks (CP)     |
| 0.05 | 19_42     | Drop Preparation Checklist  | Load is back up (LM)             |
| 0.05 | 19_43     | Drop Preparation Checklist  | Complete, Load (LM)              |
| 0.05 | 19_44     | Drop Preparation Checklist  | Acknowledged, Load (LM)1         |
| 0.05 | 19_46     | Drop Preparation Checklist  | Listen to brief (P)              |
| 0.05 | 19_47     | Drop Preparation Checklist  | Relay drop altitude (CP)         |
| 0    | 19_6      | Drop Preparation Checklist  | Open checklist (CP)              |
| 0.05 | 19_8      | Drop Preparation Checklist  | Acknowledged, Load (LM)          |
| 0.05 | 19_999    | Drop Preparation Checklist  | Complete Copilot (CP)            |
| 0    | 20_0      | Formation descent           | Approaching top of descent       |
| 0.05 | 20_1      | Formation descent           | Pass new altitude (FCI)          |
| 0.05 | 20_10     | Formation descent           | Next altitude xxxx (P)           |
| 0.05 | 20_11     | Formation descent           | Relay 30 sec FCI (J)             |
| 0.1  | 20_13     | Formation descent           | Verify clear of terrain          |
| 0.05 | 20_14     | Formation descent           | Clear of terrain (CP)            |
| 0    | 20_15     | Formation descent           | Relay 5 sec FCI (J)              |
| 0    | 20_16     | Formation descent           | Passed                           |
| 0    | 20_17     | Formation descent           | Relay "E" FCI (J)                |
| 0    | 20_18     | Formation descent           | Autopilot pitch wheel down (P)   |
| 0.05 | 20_2      | Formation descent           | Pass 30 sec FCI                  |
| 0    | 20_20     | Formation descent           | Descend                          |
| 0    | 20_21     | Formation descent           | Level off (J)                    |
| 0.05 | 20_24     | Formation descent           | 1000 above (CP)                  |
| 0    | 20_3      | Formation descent           | Pass 5 sec FCI                   |
| 0    | 20_4      | Formation descent           | Pass Execute FCI                 |
| 0    | 20_5      | Formation descent           | Level out                        |
| 0.05 | 20_6      | Formation descent           | Lead is level @ xxxx             |
| 0.05 | 20_7      | Formation descent           | 2 is level                       |
| 0    | 20_8      | Formation descent           | Dial new alt in REF MODE (P)     |
| 0.05 | 20_9      | Formation descent           | Lead's 30 sec downprep (P)       |
| 0    | 20_999    | Formation descent           | 3 is level                       |
| 0    | 21_0      | Formation turn at IP        | Approaching turn point           |
| 0    | 21_1      | Formation turn at IP        | Pass TAS (FCI)                   |
| 0    | 21_10     | Formation turn at IP        | Pass 5 sec (FCI)                 |
| 0    | 21_11     | Formation turn at IP        | Pass execute (FCI)               |
| 0    | 21_12     | Formation turn at IP        | 30 sec, passed (J)               |
| 0    | 21_13     | Formation turn at IP        | Relay FCI (J)1                   |
| 0    | 21_14     | Formation turn at IP        | Compute time delay (J)           |

|      |           |                      |                                                 |
|------|-----------|----------------------|-------------------------------------------------|
| 0    | 21_15     | Formation turn at IP | State time delay (J)                            |
| 0    | 21_16     | Formation turn at IP | Read in-track dist (J)                          |
| 0    | 21_17     | Formation turn at IP | State in track dist (J)                         |
| 0    | 21_2      | Formation turn at IP | Pass present hdg (FCI)                          |
| 0    | 21_22     | Formation turn at IP | Relay FCI (J)                                   |
| 0    | 21_23     | Formation turn at IP | Passed (J)                                      |
| 0    | 21_25     | Formation turn at IP | Relay "E" FCI (J)                               |
| 0    | 21_26     | Formation turn at IP | Passed (J)1                                     |
| 0    | 21_27     | Formation turn at IP | begin turn (J)                                  |
| 0.25 | 21_28     | Formation turn at IP | Begin turn (Lead)                               |
| 0.25 | 21_29     | Formation turn at IP | Roll out (Lead)                                 |
| 0.05 | 21_3      | Formation turn at IP | Pass next hdg (FCI)                             |
| 0.25 | 21_30     | Formation turn at IP | Observe Lead's turn (CP)                        |
| 0.05 | 21_31     | Formation turn at IP | Lead is in the turn (CP)                        |
| 0.25 | 21_32     | Formation turn at IP | Provide trend info (J)                          |
| 0.25 | 21_33     | Formation turn at IP | Observe Lead's turn (P)                         |
| 0    | 21_4      | Formation turn at IP | Lead is loading computer turn (J)               |
| 0    | 21_5      | Formation turn at IP | Relay TAS (J)                                   |
| 0    | 21_6      | Formation turn at IP | Relay present hdg (J)                           |
| 0    | 21_7      | Formation turn at IP | Lead's next hdg (CP)                            |
| 0    | 21_8      | Formation turn at IP | Box is loaded (J)                               |
| 0    | 21_9      | Formation turn at IP | Pass 30 sec (FCI)                               |
| 0.25 | 21_999    | Formation turn at IP | Roll out (J)                                    |
| 0    | 22_0      | Run-In checklist     | Run-in checklist (P)                            |
| 0.05 | 22_1      | Run-In checklist     | Pass 30 sec SD (FCI)                            |
| 0    | 22_10     | Run-In checklist     | Passed (J)1                                     |
| 0.05 | 22_11     | Run-In checklist     | Slowdown, slowdown, now (P)                     |
| 0.05 | 22_12     | Run-In checklist     | Relay "E" FCI (J)                               |
| 0    | 22_14     | Run-In checklist     | Retard throttles (J)                            |
| 0    | 22_15_0   | Move flaps 50% (CP)  | START                                           |
| 0    | 22_15_10  | Move flaps 50% (CP)  | Move flaps to 50% (CP)                          |
| 0.15 | 22_15_11  | Move flaps 50% (CP)  | Observe rudder hydraulic pressure increase (CP) |
| 0    | 22_15_12  | Move flaps 50% (CP)  | Flaps 50 (P)                                    |
| 0.15 | 22_15_13  | Move flaps 50% (CP)  | Observe <210 KIAS (P)                           |
| 0.15 | 22_15_14  | Move flaps 50% (CP)  | Observe <200 KIAS (P)                           |
| 0.15 | 22_15_15  | Move flaps 50% (CP)  | Observe <190 KIAS (P)                           |
| 0.15 | 22_15_16  | Move flaps 50% (CP)  | Observe <180 KIAS (P)                           |
| 0.15 | 22_15_3   | Move flaps 50% (CP)  | Observe <210 KIAS (CP)                          |
| 0.15 | 22_15_5   | Move flaps 50% (CP)  | Observe <200 KIAS (CP)                          |
| 0.15 | 22_15_7   | Move flaps 50% (CP)  | Observe <190 KIAS (CP)                          |
| 0.15 | 22_15_9   | Move flaps 50% (CP)  | Observe <180 KIAS (CP)                          |
| 0    | 22_15_999 | Move flaps 50% (CP)  | END                                             |
| 0    | 22_16     | Run-In checklist     | Silence warning horn (CP)                       |
| 0    | 22_17     | Run-In checklist     | Slow to 140 KIAS (J)                            |
| 0.15 | 22_19     | Run-In checklist     | Observe <150 KIAS "Clear for air defectors" (P) |

|      |           |                      |                                                             |
|------|-----------|----------------------|-------------------------------------------------------------|
| 0.05 | 22_2      | Run-In checklist     | 30 sec to slowdown (P)                                      |
| 0.05 | 22_21     | Run-In checklist     | Coming open throw switch (CP)                               |
| 0.05 | 22_22     | Run-In checklist     | observe light (CP)                                          |
| 0.05 | 22_23     | Run-In checklist     | Air deflector doors Indicate open. Doors clear to open (CP) |
| 0    | 22_24     | Run-In checklist     | Open paratroop door (LM)                                    |
| 0.05 | 22_25     | Run-In checklist     | Drift and wind information relayed (CP)                     |
| 0    | 22_26     | Run-In checklist     | Add power to maintain 140 KIAS (J)                          |
| 0    | 22_27     | Run-In checklist     | Contact Drop zone                                           |
| 0.05 | 22_28     | Run-In checklist     | Recieve DZ winds                                            |
| 0.05 | 22_29     | Run-In checklist     | Pass updated drift data (FCI)                               |
| 0    | 22_3      | Run-In checklist     | Pass 5 sec SD (FCI)                                         |
| 0    | 22_30     | Run-In checklist     | Lead is 140 KIAS                                            |
| 0.15 | 22_31     | Run-In checklist     | Arrive @ earliest descent point                             |
| 0.05 | 22_34     | Run-In checklist     | Flaps 50% (CP)                                              |
| 0    | 22_37     | Run-In checklist     | Pass 5 sec (FCI)                                            |
| 0    | 22_38     | Run-In checklist     | Pass "E" (FCI)                                              |
| 0    | 22_39_0   | input new winds (CP) | Input new winds (CP)                                        |
| 0.05 | 22_39_1   | input new winds (CP) | Verbalize new CARP (CP)                                     |
| 0.05 | 22_39_2   | input new winds (CP) | Repeat new CARP (P)                                         |
| 0.05 | 22_39_3   | input new winds (CP) | VERT GDNC Set, ____ (CP)                                    |
| 0.05 | 22_39_5   | input new winds (CP) | X PATH OFS, Set 0 (CP)                                      |
| 0    | 22_39_999 | input new winds (CP) | END                                                         |
| 0    | 22_4      | Run-In checklist     | Relay 30 sec FCI (J)                                        |
| 0.05 | 22_41     | Run-In checklist     | Complete, Load (LM)                                         |
| 0    | 22_42     | Run-In checklist     | Lead descends to drop altitude                              |
| 0    | 22_43     | Run-In checklist     | Lead slows to 130 KIAS                                      |
| 0    | 22_47     | Run-In checklist     | Relay 5 sec FCI                                             |
| 0    | 22_48     | Run-In checklist     | relay FCI (J)                                               |
| 0.05 | 22_49     | Run-In checklist     | descending (P)                                              |
| 0    | 22_5      | Run-In checklist     | Passed (J)                                                  |
| 0.25 | 22_51     | Run-In checklist     | Confirm DZ entry point (P)                                  |
| 0    | 22_52     | Run-In checklist     | Autopilot pitch wheel down (P)                              |
| 0    | 22_53     | Run-In checklist     | Dial Drop Alt+50 ft (P)                                     |
| 0    | 22_54     | Run-In checklist     | Slow to 130 KIAS                                            |
| 0    | 22_56     | Run-In checklist     | stop descent /level (J)                                     |
| 0    | 22_57     | Run-In checklist     | Run-in Checks (CP)                                          |
| 0.05 | 22_58     | Run-In checklist     | Complete, Copilot (CP)                                      |
| 0.05 | 22_6      | Run-In checklist     | Pass execute (FCI)                                          |
| 0.05 | 22_63     | Run-In checklist     | Clear to drop (DZ)                                          |
| 0.05 | 22_64     | Run-In checklist     | Acknowledge (P)                                             |
| 0.05 | 22_65     | Run-In checklist     | Acknowledge (CP)                                            |
| 0    | 22_66_0   | Check Nav sys (CP)   | START                                                       |
| 0.15 | 22_66_2   | Check Nav sys (CP)   | Verify system position (CP)                                 |
| 0    | 22_66_3   | Check Nav sys (CP)   | Perform Update (CP)                                         |
| 0    | 22_66_999 | Check Nav sys (CP)   | END                                                         |
| 0.05 | 22_67     | Run-In checklist     | Listen/record DZ winds (CP)                                 |
| 0.05 | 22_68     | Run-In checklist     | Listen DZ winds (P)                                         |
| 0    | 22_69     | Run-In checklist     | Relay drift FCI (J)                                         |

|      |           |                                |                                     |
|------|-----------|--------------------------------|-------------------------------------|
| 0.05 | 22_7      | Run-In checklist               | [callsign] slowdown, slow down, now |
| 0    | 22_70_0   | Maintain In-track distance (P) | START                               |
| 0.15 | 22_70_6   | Maintain In-track distance (P) | maintain drop airspeed (P)          |
| 0.15 | 22_70_7   | Maintain In-track distance (P) | maintain SKE in-track spacing (P)   |
| 0    | 22_70_999 | Maintain In-track distance (P) | END                                 |
| 0    | 22_71     | Run-In checklist               | clear to deselect CMD RLY (P)       |
| 0    | 22_72     | Run-In checklist               | Deselect CMD Relay (CP)             |
| 0.05 | 22_73     | Run-In checklist               | CMD RELAY-OFF (CP)                  |
| 0.05 | 22_8      | Run-In checklist               | 5 sec to slowdown (P)               |
| 0    | 22_9      | Run-In checklist               | Relay 5 sec FCI (J)                 |
| 0    | 22_999    | Run-In checklist               | END                                 |
| 0    | 24_0      | Release Point Checklist        | START                               |
| 0.05 | 24_10     | Release Point Checklist        | No drop (P)                         |
| 0.05 | 24_11     | Release Point Checklist        | No drop (CP)                        |
| 0.2  | 24_14     | Release Point Checklist        | Aircraft safe to drop? (P)          |
| 0.2  | 24_15     | Release Point Checklist        | Aircraft safe to drop? (CP)         |
| 0.05 | 24_2      | Release Point Checklist        | 1 min (P)                           |
| 0.05 | 24_24     | Release Point Checklist        | 5 sec (FCI)                         |
| 0.15 | 24_25     | Release Point Checklist        | Observe time (P)                    |
| 0.05 | 24_26     | Release Point Checklist        | 5 sec (P)                           |
| 0    | 24_27     | Release Point Checklist        | Relay 5 sec FCI (J)                 |
| 0    | 24_28     | Release Point Checklist        | Passed (J)1                         |
| 0.05 | 24_29     | Release Point Checklist        | Execute (FCI)                       |
| 0    | 24_3      | Release Point Checklist        | Relay 1 min FCI (J)                 |
| 0.1  | 24_30     | Release Point Checklist        | Observe GL time (P)                 |
| 0.05 | 24_31     | Release Point Checklist        | Green Light! (P)                    |
| 0    | 24_32     | Release Point Checklist        | Relay "E" FCI (J)                   |
| 0    | 24_33     | Release Point Checklist        | turn on light (CP)                  |
| 0.05 | 24_34     | Release Point Checklist        | On! (CP)                            |
| 0.05 | 24_36     | Release Point Checklist        | Acknowledged, Copilot (CP)1         |
| 0.05 | 24_37     | Release Point Checklist        | Acknowledged, Load (LM)1            |
| 0    | 24_38     | Release Point Checklist        | Formation cleared to drop?          |
| 0    | 24_39     | Release Point Checklist        | Formation safe to drop?             |
| 0    | 24_4      | Release Point Checklist        | Passed (J)                          |
| 0.05 | 24_40     | Release Point Checklist        | Pass no drop (FCI)                  |
| 0.05 | 24_42     | Release Point Checklist        | xxxx, no drop, ack                  |
| 0.05 | 24_43     | Release Point Checklist        |                                     |
| 0    | 24_44     | Release Point Checklist        | 3 (P)                               |
| 0    | 24_45     | Release Point Checklist        | Jumpers exit                        |
| 0.05 | 24_46_0   | Drop Malfunction               | Pilot, malfunction (LM)             |
| 0.05 | 24_46_1   | Drop Malfunction               | Brief description (LM)              |
| 0    | 24_46_2   | Drop Malfunction               | Perform emergency actions (LM)      |
| 0    | 24_46_3   | Drop Malfunction               | Perform emergency actions (P)       |
| 0    | 24_46_4   | Drop Malfunction               | Perform emergency actions (CP)      |
| 0    | 24_46_999 | Drop Malfunction               | END                                 |
| 0    | 24_47     | Release Point Checklist        | Time for usable DZ (J)              |
| 0.05 | 24_48     | Release Point Checklist        | load clear (LM)                     |
| 0.05 | 24_5      | Release Point Checklist        | Acknowledged, Load (LM)             |



|      |           |                              |                                      |
|------|-----------|------------------------------|--------------------------------------|
| 0.05 | 24_50     | Release Point Checklist      | Red light (P)                        |
| 0    | 24_51     | Release Point Checklist      | turn off light (CP)                  |
| 0.05 | 24_52     | Release Point Checklist      | on (CP)                              |
| 0    | 24_53     | Release Point Checklist      | Time for 60 sec                      |
| 0    | 24_55     | Release Point Checklist      | Computer drop switch (CP)            |
| 0.05 | 24_56     | Release Point Checklist      | Set, Auto, Pilot                     |
| 0.05 | 24_57     | Release Point Checklist      | Set, Auto, Copilot                   |
| 0    | 24_58_0   | Fly to CARP (P)              | START                                |
| 0.15 | 24_58_2   | Fly to CARP (P)              | maintain SKE xtrk position (P)       |
| 0.15 | 24_58_3   | Fly to CARP (P)              | minimize SCNS xtrk (P)               |
| 0.15 | 24_58_4   | Fly to CARP (P)              | minimize TKE (P)                     |
| 0.15 | 24_58_5   | Fly to CARP (P)              | maintain element drop altitude (P)   |
| 0.15 | 24_58_6   | Fly to CARP (P)              | maintain drop airspeed (P)           |
| 0.15 | 24_58_7   | Fly to CARP (P)              | maintain SKE in-track spacing (P)    |
| 0    | 24_58_999 | Fly to CARP (P)              | END                                  |
| 0    | 24_59     | Release Point Checklist      | Set computer drop switch (CP)        |
| 0.05 | 24_7      | Release Point Checklist      | 1 min warn (FCI)                     |
| 0    | 24_8      | Release Point Checklist      | Are jumpers safe?                    |
| 0.05 | 24_9      | Release Point Checklist      | No drop (LM)                         |
| 0    | 24_999    | Release Point Checklist      | END                                  |
| 0    | 25_0      | Completion of Drop checklist | START                                |
| 0    | 25_1      | Completion of Drop checklist | Paratroop doors (CP)                 |
| 0.05 | 25_11     | Completion of Drop checklist | Accelerate, Accelerate now (P)       |
| 0    | 25_12     | Completion of Drop checklist | set AC master switch (CP)            |
| 0    | 25_15     | Completion of Drop checklist | add throttles (J)                    |
| 0    | 25_16     | Completion of Drop checklist | Pass "E" FCI (J)                     |
| 0.05 | 25_17     | Completion of Drop checklist | Flaps up (P)                         |
| 0.05 | 25_18     | Completion of Drop checklist | Flaps tracking up (CP)               |
| 0    | 25_19     | Completion of Drop checklist | Move flap lever (CP)                 |
| 0    | 25_2      | Completion of Drop checklist | Close doors (LM)                     |
| 0.05 | 25_21     | Completion of Drop checklist | Flaps up (CP)                        |
| 0.15 | 25_22     | Completion of Drop checklist | Observe flaps 0% (CP)                |
| 0.05 | 25_3      | Completion of Drop checklist | Closed and locked (LM)               |
| 0    | 25_32     | Completion of Drop checklist | Select Computer drop switch-MAN (CP) |
| 0    | 25_35     | Completion of Drop checklist | switch off red light (CP)            |
| 0    | 25_37     | Completion of Drop checklist | Drop checks (CP)                     |
| 0.05 | 25_38     | Completion of Drop checklist | Complete, Load (LM)                  |
| 0.05 | 25_39     | Completion of Drop checklist | Complete, Copilot                    |
| 0    | 25_4      | Completion of Drop checklist | close AD switch (CP)                 |
| 0.05 | 25_40     | Completion of Drop checklist | Pass 5 sec FCI                       |
| 0.05 | 25_41     | Completion of Drop checklist | Lead's 5 sec turn prep (P)           |
| 0.05 | 25_44     | Completion of Drop checklist | Pass execute FCI                     |
| 0.05 | 25_47     | Completion of Drop checklist | Relay 5 sec FCI (P)                  |
| 0    | 25_48     | Completion of Drop checklist | Relay "E" FCI (J)                    |
| 0.05 | 25_49     | Completion of Drop checklist | L/R turn xxx (P)                     |
| 0.05 | 25_5      | Completion of Drop checklist | indicate closed (CP)                 |
| 0.25 | 25_50     | Completion of Drop checklist | monitor lead's position (CP)         |
| 0    | 25_51     | Completion of Drop checklist | advance throttles (P)                |

|      |        |                              |                                  |
|------|--------|------------------------------|----------------------------------|
| 0    | 25_52  | Completion of Drop checklist | Accelerate 140 KIAS (P)          |
| 0    | 25_54  | Completion of Drop checklist | Level @ new alt (J)              |
| 0    | 25_55  | Completion of Drop checklist | Turn to escape heading (J)       |
| 0.25 | 25_56  | Completion of Drop checklist | provide trend info to Pilot (CP) |
| 0    | 25_57  | Completion of Drop checklist | Roll out on course (J)           |
| 0.05 | 25_58  | Completion of Drop checklist | Lead is lvl xxxx                 |
| 0.05 | 25_59  | Completion of Drop checklist | 2 is level                       |
| 0    | 25_6   | Completion of Drop checklist | air deflector doors (CP)         |
| 0    | 25_60  | Completion of Drop checklist | 3 is level (P)                   |
| 0.05 | 25_61  | Completion of Drop checklist | Pass new IAS (FCI)               |
| 0    | 25_62  | Completion of Drop checklist | Relay IAS FCI (J)                |
| 0.05 | 25_63  | Completion of Drop checklist | New speed xxx (P)                |
| 0.05 | 25_64  | Completion of Drop checklist | Pass 30 sec (FCI)1               |
| 0    | 25_65  | Completion of Drop checklist | Relay 30 sec FCI (J)             |
| 0    | 25_66  | Completion of Drop checklist | 30 sec prep, Passed (J)          |
| 0    | 25_67  | Completion of Drop checklist | Pass 5 sec (FCI)                 |
| 0    | 25_68  | Completion of Drop checklist | 5 sec (J)                        |
| 0    | 25_69  | Completion of Drop checklist | Relay 5 sec FCI (J)              |
| 0    | 25_71  | Completion of Drop checklist | Pass "E" (FCI)1                  |
| 0    | 25_72  | Completion of Drop checklist | accelerate                       |
| 0    | 25_73  | Completion of Drop checklist | adjust throttles (J)             |
| 0    | 25_74  | Completion of Drop checklist | Adjust formation postn (J)1      |
| 0.05 | 25_75  | Completion of Drop checklist | X PATH OFS, Set 0 (CP)           |
| 0.05 | 25_76  | Completion of Drop checklist | VERT GDNC Set, ____ (CP)         |
| 0    | 25_77  | Completion of Drop checklist | clear to select CMD RLY (P)      |
| 0    | 25_78  | Completion of Drop checklist | select CMD Relay (CP)            |
| 0.05 | 25_79  | Completion of Drop checklist | CMD RELAY-ON (CP)                |
| 0    | 25_80  | Completion of Drop checklist | Dial Escape Alt (REF MODE) (P)   |
| 0    | 25_81  | Completion of Drop checklist | Autopilot pitch wheel up (P)     |
| 0    | 25_82  | Completion of Drop checklist | select CMD Relay (CP)1           |
| 0    | 25_999 | Completion of Drop checklist | END                              |
| 0    | 44_0   | Freq change                  | START                            |
| 0.05 | 44_1   | Freq change                  | Direct freq change1              |
| 0.05 | 44_2   | Freq change                  | Acknowledge (P)2                 |
| 0    | 44_3   | Freq change                  | Change radios (CP)1              |
| 0.05 | 44_4   | Freq change                  | Check in1                        |
| 0.05 | 44_5   | Freq change                  | Acknowledge (P)3                 |
| 0    | 44_999 | Freq change                  | END                              |
| 0    | 45_0   | Freq change1                 | START                            |
| 0.05 | 45_3   | Freq change1                 | Obtain drop scores               |
| 0.05 | 45_4   | Freq change1                 | Direct freq change               |
| 0.05 | 45_5   | Freq change1                 | Acknowledge (P)                  |
| 0    | 45_6   | Freq change1                 | Change radios (CP)               |
| 0.05 | 45_7   | Freq change1                 | Check in                         |
| 0.05 | 45_8   | Freq change1                 | Acknowledge (P)1                 |
| 0.05 | 45_9   | Freq change1                 | Copy drop scores (CP)            |
| 0    | 45_999 | Freq change1                 | END                              |
| 0    | 999    | (Root)                       | Model END                        |



**Table 31: Task Listing and Tactical SA for Maximum Effort Airland (C-130H)**

| <b>Tac SA Value</b> | <b>Task ID</b> | <b>Function</b>   | <b>Task</b>                 |
|---------------------|----------------|-------------------|-----------------------------|
| 0                   | 0              | (Root)            | Model START                 |
| 0                   | 1_0            | Descent checklist | START                       |
| 0                   | 1_1            | Descent checklist | Compute TOLD card (E)       |
| 0                   | 1_10           | Descent checklist | SCNS LZ Data (E)            |
| 0.05                | 1_11           | Descent checklist | Checked, Copilot (CP)       |
| 0.05                | 1_12           | Descent checklist | Checked, Nav (N)            |
| 0                   | 1_13           | Descent checklist | Enter/verify LZ data (N)    |
| 0.1                 | 1_14           | Descent checklist | verify LZ data (CP)         |
| 0                   | 1_15_0         | Depressurize (E)  | Is altitude appropriate?    |
| 0                   | 1_15_2         | Depressurize (E)  | Wait                        |
| 0                   | 1_15_3         | Depressurize (E)  | Set cabin rate knob         |
| 0                   | 1_15_4         | Depressurize (E)  | Set pressure controller     |
| 0                   | 1_15_5         | Depressurize (E)  | set air cond master switch  |
| 0.15                | 1_15_999       | Depressurize (E)  | Cabin diff press =0         |
| 0                   | 1_16           | Descent checklist | Set fuel panel (E)          |
| 0                   | 1_18           | Descent checklist | Altimeters (E)              |
| 0                   | 1_19           | Descent checklist | set altimeter (N)           |
| 0                   | 1_2            | Descent checklist | Give card to CP (E)         |
| 0                   | 1_20           | Descent checklist | set altimeter (CP)          |
| 0                   | 1_21           | Descent checklist | set altimeter (P)           |
| 0.05                | 1_22           | Descent checklist | state setting (P)           |
| 0.05                | 1_23           | Descent checklist | state setting (CP)          |
| 0.05                | 1_24           | Descent checklist | state setting, SCNS set (N) |
| 0                   | 1_25           | Descent checklist | set SCNS altimeter (N)      |
| 0                   | 1_26           | Descent checklist | Radar altimeter (E)         |
| 0.05                | 1_27           | Descent checklist | set radar altimeter (N)     |
| 0.05                | 1_28           | Descent checklist | set radar altimeter (P)     |
| 0.05                | 1_29           | Descent checklist | state setting (P) 1         |
| 0.1                 | 1_3            | Descent checklist | Check TOLD (CP)             |
| 0                   | 1_30           | Descent checklist | state setting(N)            |
| 0                   | 1_31           | Descent checklist | GCAS (E)                    |
| 0                   | 1_32           | Descent checklist | set GCAS (CP)               |
| 0.05                | 1_33           | Descent checklist | set, tactical (CP)          |
| 0                   | 1_34           | Descent checklist | Vert Ref switches (E)       |
| 0.05                | 1_35           | Descent checklist | state setting (P)2          |
| 0.05                | 1_36           | Descent checklist | state setting (CP)1         |
| 0                   | 1_37           | Descent checklist | set defensive systems (N)   |
| 0                   | 1_38           | Descent checklist | Defensive systems (E)       |
| 0.05                | 1_39           | Descent checklist | state setting(N)1           |
| 0                   | 1_4            | Descent checklist | TOLD (E)                    |
| 0                   | 1_40           | Descent checklist | Descent checks (E)          |
| 0.05                | 1_41           | Descent checklist | Complete, Copilot (CP)      |

|      |         |                          |                                                 |
|------|---------|--------------------------|-------------------------------------------------|
| 0.05 | 1_42    | Descent checklist        | Nav                                             |
| 0.05 | 1_43    | Descent checklist        | Load                                            |
| 0    | 1_44    | Descent checklist        | Retard throttles (P)                            |
| 0    | 1_45    | Descent checklist        | Silence warning horn (CP)                       |
| 0    | 1_46    | Descent checklist        | Disconnect autopilot (P)                        |
| 0    | 1_47    | Descent checklist        | Call LZ (CP)                                    |
| 0.05 | 1_48    | Descent checklist        | Give Wx/rwy (ATC)                               |
| 0.05 | 1_49    | Descent checklist        | Copy wx                                         |
| 0.05 | 1_5     | Descent checklist        | Checked (CP)                                    |
| 0.05 | 1_50    | Descent checklist        | Copy wx (E)                                     |
| 0    | 1_51    | Descent checklist        | Give Posit and appch request (CP)               |
| 0.05 | 1_52    | Descent checklist        | acknowledge/ approve entry (ATC)                |
| 0.05 | 1_53    | Descent checklist        | Report 2 way w/ LZ (N)                          |
| 0.05 | 1_54    | Descent checklist        | acknowledge/approve frequency change (Tac ATC)  |
| 0    | 1_55    | Descent checklist        | Report release from Tac ATC (CP)                |
| 0    | 1_56    | Descent checklist        | Reach descent point                             |
| 0    | 1_57    | Descent checklist        | Compute descent (P)                             |
| 0    | 1_58    | Descent checklist        | Compute descent (CP)                            |
| 0    | 1_59    | Descent checklist        | Compute descent (N)                             |
| 0    | 1_6     | Descent checklist        | Crew, Descent checklist (P)                     |
| 0.05 | 1_60    | Descent checklist        | Compare Data (P)                                |
| 0.05 | 1_61    | Descent checklist        | Compare Data (CP)                               |
| 0.05 | 1_62    | Descent checklist        | Compare Data (N)                                |
| 0.05 | 1_63    | Descent checklist        | Listen to brief (CP)                            |
| 0.05 | 1_64    | Descent checklist        | Listen to brief (N)                             |
| 0    | 1_7     | Descent checklist        | Crew briefing (E)                               |
| 0    | 1_8     | Descent checklist        | Brief arrival (P)                               |
| 0.05 | 1_9     | Descent checklist        | Complete (P)                                    |
| 0.05 | 1_999   | Descent checklist        | Complete, Engineer                              |
| 0.2  | 12      | (Root)                   | Field in sight, copilot (CP)                    |
| 0.2  | 13      | (Root)                   | Field in sight, Pilot (P)                       |
| 0    | 2_0     | Before Landing checklist | START                                           |
| 0.05 | 2_1_0   | Move flaps 50% (CP)      | Flaps tracking 50% (CP)                         |
| 0    | 2_1_10  | Move flaps 50% (CP)      | Move flaps to 30% (CP)                          |
| 0.15 | 2_1_11  | Move flaps 50% (CP)      | Observe <190 KIAS (CP)                          |
| 0    | 2_1_12  | Move flaps 50% (CP)      | Move flaps to 40% (CP)                          |
| 0.15 | 2_1_13  | Move flaps 50% (CP)      | Observe <180 KIAS (CP)                          |
| 0.15 | 2_1_2   | Move flaps 50% (CP)      | Observe <220 KIAS (CP)                          |
| 0    | 2_1_3   | Move flaps 50% (CP)      | Move flaps to 50% (CP)                          |
| 0.15 | 2_1_4   | Move flaps 50% (CP)      | Observe rudder hydraulic pressure increase (CP) |
| 0.15 | 2_1_5   | Move flaps 50% (CP)      | Observe rudder hydraulic pressure increase (E)  |
| 0    | 2_1_6   | Move flaps 50% (CP)      | Move flaps to 10% (CP)                          |
| 0.15 | 2_1_7   | Move flaps 50% (CP)      | Observe <210 KIAS (CP)                          |
| 0    | 2_1_8   | Move flaps 50% (CP)      | Move flaps to 20% (CP)                          |
| 0.15 | 2_1_9   | Move flaps 50% (CP)      | Observe <200 KIAS (CP)                          |
| 0    | 2_1_999 | Move flaps 50% (CP)      | END                                             |
| 0    | 2_10    | Before Landing checklist | Move gear handle (CP)                           |
| 0.15 | 2_11    | Before Landing checklist | Watch hydro px (CP)                             |

|      |      |                          |                                      |
|------|------|--------------------------|--------------------------------------|
| 0    | 2_12 | Before Landing checklist | Before Landing checklist (P)         |
| 0    | 2_13 | Before Landing checklist | Hot Mike (listen)                    |
| 0    | 2_14 | Before Landing checklist | Seat belt, shoulder harnesses (E)    |
| 0.05 | 2_15 | Before Landing checklist | Fastened, unlocked, Pilot            |
| 0.05 | 2_16 | Before Landing checklist | Copilot                              |
| 0.05 | 2_17 | Before Landing checklist | Engineer                             |
| 0    | 2_18 | Before Landing checklist | Altimeters (E)                       |
| 0    | 2_19 | Before Landing checklist | set altimeter (N)                    |
| 0.05 | 2_2  | Before Landing checklist | Flaps 50, on speed (P)               |
| 0    | 2_20 | Before Landing checklist | set altimeter (CP)                   |
| 0    | 2_21 | Before Landing checklist | set altimeter (P)                    |
| 0.05 | 2_22 | Before Landing checklist | state setting (P)                    |
| 0.05 | 2_23 | Before Landing checklist | state setting (CP)                   |
| 0.05 | 2_24 | Before Landing checklist | state setting, SCNS set (N)          |
| 0    | 2_25 | Before Landing checklist | set SCNS altimeter (N)               |
| 0.05 | 2_26 | Before Landing checklist | set/read radar altimeter (N)         |
|      |      |                          |                                      |
| 0.05 | 2_27 | Before Landing checklist | set/read radar altimeter (P)         |
| 0    | 2_28 | Before Landing checklist | Radar altimeter (E)                  |
| 0    | 2_3  | Before Landing checklist | Level at config altitude             |
| 0    | 2_31 | Before Landing checklist | Flaps                                |
| 0.05 | 2_32 | Before Landing checklist | state flap setting (CP)              |
| 0    | 2_33 | Before Landing checklist | Gear                                 |
| 0.15 | 2_34 | Before Landing checklist | verify gear/ nose wheel (P)          |
| 0.05 | 2_35 | Before Landing checklist | Down, indicators checked, Pilot      |
| 0.05 | 2_36 | Before Landing checklist | Copilot1                             |
| 0.15 | 2_37 | Before Landing checklist | verify gear (CP)                     |
| 0.15 | 2_38 | Before Landing checklist | verify gear (E)                      |
| 0.05 | 2_39 | Before Landing checklist | Engineer1                            |
| 0.05 | 2_4  | Before Landing checklist | Flaps are 50% (CP)                   |
| 0.1  | 2_40 | Before Landing checklist | verify yaw damper disengaged (E)     |
| 0    | 2_41 | Before Landing checklist | turn off syncrophaser (E)            |
| 0    | 2_42 | Before Landing checklist | turn off underfloor heating (E)      |
| 0    | 2_43 | Before Landing checklist | Landing Light panel                  |
| 0    | 2_44 | Before Landing checklist | Flip landing light switches          |
| 0    | 2_45 | Before Landing checklist | lights on point                      |
| 0.05 | 2_46 | Before Landing checklist | Set (CP)                             |
| 0    | 2_47 | Before Landing checklist | hydraulic panel (E)                  |
| 0.05 | 2_48 | Before Landing checklist | Set (CP)1                            |
| 0.15 | 2_49 | Before Landing checklist | verify brake switches/pressures (CP) |
| 0.15 | 2_5  | Before Landing checklist | Observe <230 IAS (P)                 |
| 0    | 2_50 | Before Landing checklist | turn on aux pump (CP)                |
| 0    | 2_51 | Before Landing checklist | Flip Antiskid test switch (E)        |
| 0.1  | 2_52 | Before Landing checklist | Observe Antiskid test lights (E)     |
| 0    | 2_53 | Before Landing checklist | Before Landing checks (E)            |
| 0.05 | 2_54 | Before Landing checklist | Complete, Copilot                    |

|      |         |                             |                                                                 |
|------|---------|-----------------------------|-----------------------------------------------------------------|
| 0.05 | 2_55    | Before Landing checklist    | Nav                                                             |
| 0.05 | 2_56    | Before Landing checklist    | Load                                                            |
| 0.05 | 2_57    | Before Landing checklist    | Complete, Engineer (E)                                          |
| 0.15 | 2_58    | Before Landing checklist    | Observe <145 KIAS (P)                                           |
| 0.05 | 2_59    | Before Landing checklist    | Flaps 100% (P)                                                  |
| 0.15 | 2_6     | Before Landing checklist    | Observe <165 KIAS (P)                                           |
| 0.15 | 2_60    | Before Landing checklist    | Observe <145 KIAS (CP)                                          |
| 0    | 2_61    | Before Landing checklist    | Move flaps to 100% (CP)                                         |
| 0.05 | 2_62    | Before Landing checklist    | Flaps tracking 100% (CP)                                        |
| 0    | 2_63    | Before Landing checklist    | Adjust throttles (P)                                            |
| 0    | 2_65    | Before Landing checklist    | slow to threshold speed (P)<br>Flaps set 100% (CP)              |
|      |         |                             | 2_68 Before Landing checklist descend @ final approach (P)      |
|      |         |                             | 2_69 Before Landing checklist adjust defensive systems (N)      |
|      |         |                             | 2_7 Before Landing checklist Command gear down                  |
| 0.05 | 2_67    | Before Landing checklist    | 2_70 Before Landing checklist Give winds / Clear to Land" (ATC) |
| 0.05 | 2_71    | Before Landing checklist    | Cleared to land (CP)                                            |
| 0.05 | 2_72    | Before Landing checklist    | Gear down (CP)                                                  |
| 0    | 2_73    | Before Landing checklist    | Slowdown/trim (P)                                               |
| 0.05 | 2_74    | Before Landing checklist    | 1000 Above (CP)                                                 |
| 0    | 2_75    | Before Landing checklist    | Pull hot mike knob (P)                                          |
| 0    | 2_76    | Before Landing checklist    | Pull hot mike knob (CP)                                         |
| 0.05 | 2_77    | Before Landing checklist    | Pilot is hot mike (P)                                           |
| 0.05 | 2_78    | Before Landing checklist    | Copilot is hot mike (CP)                                        |
| 0.15 | 2_8     | Before Landing checklist    | Verify <165 KIAS (CP)                                           |
| 0.05 | 2_9     | Before Landing checklist    | Speed's good, gear down (CP)                                    |
| 0    | 2_999   | Before Landing checklist    | END                                                             |
| 0    | 4_0     | On the runway               | START                                                           |
|      |         | Airspeed/Altitude sing-song |                                                                 |
| 0.05 | 4_1_0   | Airspeed/Altitude sing-song | 50 feet (N)                                                     |
| 0.05 | 4_1_1   | Airspeed/Altitude sing-song | State speed & descent rate (CP)                                 |
| 0    | 4_1_10  | Airspeed/Altitude sing-song | Adjust throttles (P)                                            |
| 0.05 | 4_1_2   | Airspeed/Altitude sing-song | 40 (N)                                                          |
| 0.05 | 4_1_3   | Airspeed/Altitude sing-song | State speed & descent rate (CP)1                                |
| 0.05 | 4_1_4   | Airspeed/Altitude sing-song | 30 (N)                                                          |
| 0.05 | 4_1_5   | Airspeed/Altitude sing-song | State speed & descent rate (CP)2                                |
| 0.05 | 4_1_6   | Airspeed/Altitude sing-song | 20 (N)                                                          |
| 0.05 | 4_1_7   | Airspeed/Altitude sing-song | State speed & descent rate (CP)3                                |
| 0.05 | 4_1_8   | Airspeed/Altitude sing-song | 10 (N)                                                          |
| 0    | 4_1_9   | Airspeed/Altitude sing-song | Adjust pitch (P)                                                |
| 0    | 4_1_999 | Airspeed/Altitude sing-song | END                                                             |
| 0.05 | 4_10    | On the runway               | Going around (P)                                                |
| 0    | 4_100   | On the runway               | Offload/Onload (LM)                                             |

|      |          |               |                                          |
|------|----------|---------------|------------------------------------------|
| 0.15 | 4_101    | On the runway | Safety Observe (N)                       |
| 0    | 4_102    | On the runway | Run locks (N)                            |
| 0.05 | 4_103    | On the runway | Relay upload weight (LM)                 |
| 0    | 4_104    | On the runway | Compute TOLD (E)                         |
| 0    | 4_105    | On the runway | Post TOLD (E)                            |
| 0.1  | 4_106    | On the runway | Check TOLD (CP)                          |
| 0.05 | 4_107    | On the runway | Clear to taxi (LM)                       |
| 0    | 4_108    | On the runway | Return to seat (N)                       |
| 0    | 4_109    | On the runway | Interphone/PA (E)1                       |
| 0    | 4_110    | On the runway | flip PA switch (P)1                      |
| 0    | 4_111    | On the runway | flip PA switch (N)1                      |
| 0.05 | 4_112    | On the runway | set, Pilot1                              |
| 0.05 | 4_113    | On the runway | Copilot2                                 |
| 0.05 | 4_114    | On the runway | Nav2                                     |
| 0.05 | 4_116    | On the runway | Engineer2                                |
| 0    | 4_117    | On the runway | ERO Ops Stop checks (E)                  |
| 0.05 | 4_118    | On the runway | Complete, Load                           |
| 0.05 | 4_119    | On the runway | Engineer3                                |
| 0    | 4_120    | On the runway | Release parking brake (P)                |
| 0.05 | 4_121    | On the runway | Clear to up speed a pair (P)             |
| 0.05 | 4_122    | On the runway | Inboards coming up (E)                   |
| 0    | 4_123    | On the runway | pull LGS1 buttons (E)2                   |
| 0.15 | 4_124    | On the runway | Observe upspeed (E)                      |
| 0.15 | 4_125    | On the runway | Observe upspeed (CP)                     |
| 0.2  | 4_126    | On the runway | Taxi (P)                                 |
| 0.05 | 4_127    | On the runway | Flaps 50                                 |
| 0.05 | 4_130    | On the runway | Flaps tracking 50% (CP)1                 |
| 0    | 4_131    | On the runway | Move flaps to 50% (CP)1                  |
| 0    | 4_132    | On the runway | Set take off trim (CP)                   |
| 0    | 4_133    | On the runway | Set exterior lights (CP)                 |
| 0    | 4_134    | On the runway | Set exterior lights (CP)1                |
| 0    | 4_135    | On the runway | Lights (P)                               |
| 0    | 4_136    | On the runway | Set exterior lights (CP)2                |
| 0    | 4_143_0  | Go Around     | START                                    |
| 0    | 4_143_1  | Go Around     | Add power (P)                            |
| 0    | 4_143_10 | Go Around     | Turn to final                            |
| 0    | 4_143_15 | Go Around     | Announce go around / request closed (CP) |
| 0.05 | 4_143_16 | Go Around     | Clear to closed pattern (ATC)            |
| 0.05 | 4_143_17 | Go Around     | Acknowledge clearance (CP)               |
| 0.15 | 4_143_18 | Go Around     | Observe <145 KIAS (P)                    |
| 0.05 | 4_143_19 | Go Around     | Flaps 100% (P)                           |
| 0    | 4_143_2  | Go Around     | Climb to altitude (P)                    |
| 0.15 | 4_143_20 | Go Around     | Observe <145 KIAS (CP)                   |
| 0    | 4_143_21 | Go Around     | Move flaps to 100% (CP)1                 |
| 0.05 | 4_143_22 | Go Around     | Flaps tracking 100% (CP)                 |
| 0    | 4_143_23 | Go Around     | Reduce throttles (P)1                    |
| 0.05 | 4_143_29 | Go Around     | Report base turn w/ gear (CP)            |
| 0.05 | 4_143_3  | Go Around     | Flaps tracking 50% (CP)                  |



|      |           |               |                                                                  |
|------|-----------|---------------|------------------------------------------------------------------|
| 0.05 | 4_143_30  | Go Around     | Give winds / "Clear to Land" (ATC)                               |
| 0.05 | 4_143_31  | Go Around     | Cleared to land (CP)                                             |
| 0    | 4_143_32  | Go Around     | Turn to closed pattern (P)                                       |
| 0.05 | 4_143_33  | Go Around     | Leaving gear and flaps, after takeoff touch and go checklist (P) |
| 0.05 | 4_143_34  | Go Around     | Checklist (E)                                                    |
| 0    | 4_143_35  | Go Around     | Crew Briefing (P)                                                |
| 0.05 | 4_143_36  | Go Around     | Listen (CP)                                                      |
| 0.05 | 4_143_37  | Go Around     | Listen (N)                                                       |
| 0.05 | 4_143_38  | Go Around     | Listen (E)                                                       |
| 0    | 4_143_4   | Go Around     | Move flaps to 50% (CP)                                           |
| 0    | 4_143_40  | Go Around     | Before Landing Touch and Go Checklist (P)                        |
| 0.05 | 4_143_41  | Go Around     | Checklist (E)1                                                   |
| 0.05 | 4_143_42  | Go Around     | Checklist (CP)                                                   |
| 0.05 | 4_143_43  | Go Around     | Checklist (P)                                                    |
| 0.05 | 4_143_5   | Go Around     | Flaps 50                                                         |
| 0    | 4_143_7   | Go Around     | Level at altitude                                                |
| 0    | 4_143_9   | Go Around     | adjust throttles (P)                                             |
| 0    | 4_143_999 | Go Around     | END                                                              |
| 0.05 | 4_144     | On the runway | Give taxi instructions                                           |
| 0.05 | 4_145     | On the runway | Read back (CP)                                                   |
| 0    | 4_146     | On the runway | Coordinate departure (CP)                                        |
| 0.05 | 4_147     | On the runway | Coordinate departure (ATC)                                       |
| 0    | 4_148     | On the runway | Request taxi (CP)                                                |
| 0.05 | 4_149     | On the runway | Give taxi instructions                                           |
| 0.05 | 4_150     | On the runway | Read back (CP)1                                                  |
| 0.05 | 4_151     | On the runway | Listen (CP)                                                      |
| 0.05 | 4_152     | On the runway | Listen (N)                                                       |
| 0.05 | 4_153     | On the runway | Listen (E)                                                       |
| 0.2  | 4_2       | On the runway | Observe aimpoint (CP)                                            |
| 0.2  | 4_29      | On the runway | Check for asymmetric thrust (P)                                  |
| 0.05 | 4_3       | On the runway | direct pilot corrections (CP)                                    |
| 0.15 | 4_30      | On the runway | Check for asymmetric thrust (E)                                  |
| 0.05 | 4_31      | On the runway | Cleared reverse (E)                                              |
| 0    | 4_32      | On the runway | Apply brakes (P)                                                 |
| 0.15 | 4_33      | On the runway | Verify <115 KIAS                                                 |
| 0.15 | 4_34      | On the runway | Verify <115 KIAS (E)                                             |
| 0.05 | 4_35      | On the runway | Copilot's yoke (P)                                               |
| 0.05 | 4_36      | On the runway | Copilot's yoke (CP)                                              |
| 0.2  | 4_37      | On the runway | Maintain wings level (CP)                                        |
| 0    | 4_38      | On the runway | Steer with tiller wheel (P)                                      |
| 0    | 4_39      | On the runway | Move throttles to Max reverse (P)                                |
| 0.2  | 4_4       | On the runway | Make corrections (P)                                             |
| 0.15 | 4_40      | On the runway | Observe 60 KIAS (CP)                                             |
| 0.05 | 4_41      | On the runway | 60 (CP)                                                          |
| 0    | 4_42      | On the runway | Move throttles out of reverse (P)                                |
| 0.05 | 4_43      | On the runway | 40 (CP)                                                          |
| 0    | 4_44      | On the runway | Throttles-ground idle (P)1                                       |
| 0.2  | 4_45      | On the runway | Slow to taxi speed (P)                                           |

|      |      |               |                                    |
|------|------|---------------|------------------------------------|
| 0.05 | 4_46 | On the runway | Clear to down- speed outboards (P) |
| 0.15 | 4_47 | On the runway | verify <30 knots (E)               |
| 0.05 | 4_48 | On the runway | Outboards coming down (E)          |
| 0    | 4_49 | On the runway | press LGSI buttons (E)             |
| 0    | 4_5  | On the runway | Reduce throttles (P)               |
| 0.15 | 4_50 | On the runway | Observe downspeed (E)              |
| 0.15 | 4_51 | On the runway | Observe downspeed (CP)             |
| 0    | 4_52 | On the runway | Start APU (E)                      |
| 0    | 4_53 | On the runway | ERO Ops stop checklist             |
| 0    | 4_54 | On the runway | Safe defensive system (N)          |
| 0    | 4_55 | On the runway | Radar-standby (N)                  |
| 0    | 4_56 | On the runway | Set AC 'No Press' (E)              |
| 0    | 4_57 | On the runway | Clear to open ramp/door (P)        |
| 0    | 4_58 | On the runway | Nav panel (E)                      |
| 0.05 | 4_59 | On the runway | set (N)                            |
| 0.2  | 4_6  | On the runway | Flare aircraft (P)                 |
| 0    | 4_60 | On the runway | Set APU/ electrical panel (E)      |
| 0.05 | 4_61 | On the runway | Clear to down speed inboards? (E)  |
| 0    | 4_62 | On the runway | Roger (LM)                         |
| 0    | 4_63 | On the runway | Open ramp/door (LM)                |
| 0.1  | 4_64 | On the runway | Observe door open light (P)        |
| 0    | 4_65 | On the runway | Clear (P)                          |
| 0.05 | 4_66 | On the runway | Inboards coming down (E)1          |
| 0    | 4_67 | On the runway | press LGSI buttons (E)1            |
| 0.15 | 4_68 | On the runway | Observe downspeed (E)1             |
| 0.15 | 4_69 | On the runway | Observe downspeed (CP)1            |
| 0    | 4_7  | On the runway | Throttles-ground idle (P)          |
| 0    | 4_70 | On the runway | Set anti-icing panel (E)           |
| 0.2  | 4_71 | On the runway | Turn off of runway (P)             |
| 0    | 4_72 | On the runway | Crew briefing (E)                  |
| 0    | 4_73 | On the runway | Brief crew (P)                     |
| 0.2  | 4_74 | On the runway | Taxi to park (P)                   |
| 0.2  | 4_75 | On the runway | Brake to stop (P)                  |
| 0.05 | 4_76 | On the runway | complete (P)                       |
| 0    | 4_77 | On the runway | Set parking brake (P)              |
| 0    | 4_78 | On the runway | Parking brake (E)                  |
| 0.05 | 4_79 | On the runway | set (P)                            |
| 0.2  | 4_8  | On the runway | Touchdown                          |
| 0    | 4_80 | On the runway | Hot Mike (E)                       |
| 0.05 | 4_81 | On the runway | on, Pilot                          |
| 0.05 | 4_82 | On the runway | Copilot                            |
| 0.05 | 4_83 | On the runway | Nav                                |
| 0.05 | 4_84 | On the runway | Engineer                           |
| 0    | 4_85 | On the runway | Interphone/PA (E)                  |
| 0    | 4_86 | On the runway | flip PA switch (P)                 |
| 0    | 4_87 | On the runway | flip PA switch (N)                 |
| 0.05 | 4_88 | On the runway | Checked, Pilot                     |
| 0.05 | 4_89 | On the runway | Copilot1                           |

|      |       |               |                              |
|------|-------|---------------|------------------------------|
| 0.05 | 4_9   | On the runway | Go around (CP)               |
| 0.05 | 4_90  | On the runway | Nav1                         |
| 0.05 | 4_91  | On the runway | Load                         |
| 0.05 | 4_92  | On the runway | Engineer1                    |
| 0    | 4_93  | On the runway | Move to Safety position (N)  |
| 0    | 4_94  | On the runway | Safety Observer (E)          |
| 0.05 | 4_95  | On the runway | In position (N)              |
| 0    | 4_96  | On the runway | Doors                        |
| 0.05 | 4_97  | On the runway | Clear to open ramp/door (P)1 |
| 0    | 4_98  | On the runway | Offload/Onload clearance (E) |
| 0.05 | 4_99  | On the runway | Clear to offload/onload (P)2 |
| 0    | 4_999 | On the runway | END                          |
| 0    |       | 8 (Root)      | Give Posit (CP)              |
| 0.05 |       | 9 (Root)      | Request posit (ATC)          |
| 0    |       | 999 (Root)    | Model END                    |

**Table 32: Task Listing and Tactical SA Values for Maximum Effort Airland (C-130J)**

| <b>Tac SA Value</b> | <b>Task ID</b> | <b>Function</b>    | <b>Task</b>                                    |
|---------------------|----------------|--------------------|------------------------------------------------|
| 0                   | 1_0            | Approach checklist | START                                          |
| 0                   | 1_1            | Approach checklist | Program TOLD (CP)                              |
| 0                   | 1_10           | Approach checklist | CNI-MU Data (CP)                               |
| 0.05                | 1_11           | Approach checklist | Checked, Copilot (CP)                          |
| 0.05                | 1_12           | Approach checklist | Checked, Pilot (P)                             |
| 0                   | 1_13           | Approach checklist | Program CNI-MU                                 |
| 0.1                 | 1_14           | Approach checklist | verify LZ data (P)                             |
| 0                   | 1_15_0         | Depressurize (CP)  | Is altitude appropriate?                       |
| 0                   | 1_15_3         | Depressurize (CP)  | Set cabin rate knob                            |
| 0                   | 1_15_4         | Depressurize (CP)  | Set pressure controller                        |
| 0                   | 1_15_5         | Depressurize (CP)  | set air cond master switch                     |
| 0                   | 1_15_999       | Depressurize (CP)  | END                                            |
| 0                   | 1_16           | Approach checklist | Set fuel panel (CP)                            |
| 0                   | 1_18           | Approach checklist | Altimeters (CP)                                |
| 0.1                 | 1_2            | Approach checklist | Read TOLD (P)                                  |
| 0                   | 1_20           | Approach checklist | set altimeter (CP)                             |
| 0                   | 1_21           | Approach checklist | set altimeter (P)                              |
| 0.05                | 1_22           | Approach checklist | state setting (P)                              |
| 0.05                | 1_23           | Approach checklist | state setting (CP)                             |
| 0                   | 1_26           | Approach checklist | TOLD (CP)                                      |
| 0                   | 1_27           | Approach checklist | set radar altimeter (CP)                       |
| 0                   | 1_28           | Approach checklist | set radar altimeter (P)                        |
| 0.05                | 1_29           | Approach checklist | Reviewed, Pilot (P)                            |
| 0.05                | 1_30           | Approach checklist | Reviewed, Copilot (CP)                         |
| 0                   | 1_32           | Approach checklist | set GCAS (CP)                                  |
| 0                   | 1_37           | Approach checklist | set defensive systems (CP)                     |
| 0                   | 1_4            | Approach checklist | Approach setup (CP)                            |
| 0                   | 1_40           | Approach checklist | Approach checks (CP)                           |
| 0.05                | 1_43           | Approach checklist | Complete Load                                  |
| 0                   | 1_44           | Approach checklist | Retard throttles (P)                           |
| 0                   | 1_45           | Approach checklist | Silence warning horn (CP)                      |
| 0                   | 1_46           | Approach checklist | Disconnect autopilot (P)                       |
| 0                   | 1_47           | Approach checklist | Call LZ (CP)                                   |
| 0.05                | 1_48           | Approach checklist | Give Wx/rwy (ATC)                              |
| 0.05                | 1_49           | Approach checklist | Copy wx                                        |
| 0.05                | 1_5            | Approach checklist | Copilot (CP)                                   |
| 0                   | 1_51           | Approach checklist | Give Posit and appch request (CP)              |
| 0.05                | 1_52           | Approach checklist | acknowledge/ approve entry (ATC)               |
| 0.05                | 1_53           | Approach checklist | Report 2 way w/ LZ (P)                         |
| 0.05                | 1_54           | Approach checklist | acknowledge/approve frequency change (Tac ATC) |
| 0.05                | 1_55           | Approach checklist | Report release from Tac ATC (CP)               |
| 0                   | 1_56           | Approach checklist | Reach descent point                            |
| 0                   | 1_57           | Approach checklist | Compute descent (P)                            |

|      |         |                          |                                                 |
|------|---------|--------------------------|-------------------------------------------------|
| 0    | 1_58    | Approach checklist       | Compute descent (CP)                            |
| 0    | 1_6     | Approach checklist       | Crew, Approach checklist (P)                    |
| 0.05 | 1_60    | Approach checklist       | Compare Data (P)                                |
| 0.05 | 1_61    | Approach checklist       | Compare Data (CP)                               |
| 0.05 | 1_63    | Approach checklist       | Listen to brief (CP)                            |
| 0    | 1_64    | Approach checklist       | Configure HUD/REF MODE/CNBP/AMU (P)             |
| 0    | 1_65    | Approach checklist       | Configure HUD/REF MODE/CNBP/AMU (CP)            |
| 0    | 1_66    | Approach checklist       | set stby altimeter (P)1                         |
| 0.05 | 1_67    | Approach checklist       | Complete (P)                                    |
| 0    | 1_68    | Approach checklist       | Seat belt, shoulder harnesses (CP)              |
| 0.05 | 1_69    | Approach checklist       | Fastened, unlocked, Pilot                       |
| 0    | 1_7     | Approach checklist       | Crew briefing (CP)                              |
| 0.05 | 1_70    | Approach checklist       | Copilot                                         |
| 0    | 1_8     | Approach checklist       | Brief arrival (P)                               |
| 0.05 | 1_9     | Approach checklist       | Complete, Pilot (P)                             |
| 0.05 | 1_999   | Approach checklist       | Complete, Copilot                               |
| 0.2  |         | 12 (Root)                | Field in sight, copilot (CP)                    |
| 0.2  |         | 13 (Root)                | Field in sight, Pilot (P)                       |
| 0    | 2_0     | Before Landing checklist | START                                           |
| 0    | 2_1_0   | Move flaps 50% (CP)      | START                                           |
| 0.15 | 2_1_11  | Move flaps 50% (CP)      | Observe <190 KIAS (CP)                          |
| 0.15 | 2_1_13  | Move flaps 50% (CP)      | Observe <180 KIAS (CP)                          |
| 0.05 | 2_1_14  | Move flaps 50% (CP)      | Flaps tracking 50% (CP)                         |
| 0.05 | 2_1_15  | Move flaps 50% (CP)      | Flaps 50, on speed (P)                          |
| 0.15 | 2_1_16  | Move flaps 50% (CP)      | Observe <190 KIAS (P)                           |
| 0.15 | 2_1_17  | Move flaps 50% (CP)      | Observe <180 KIAS (P)                           |
| 0.15 | 2_1_18  | Move flaps 50% (CP)      | Observe <220 KIAS (P)                           |
| 0.15 | 2_1_19  | Move flaps 50% (CP)      | Observe <210 KIAS (P)                           |
| 0.15 | 2_1_2   | Move flaps 50% (CP)      | Observe <220 KIAS (CP)                          |
| 0.15 | 2_1_20  | Move flaps 50% (CP)      | Observe <200 KIAS (P)                           |
| 0    | 2_1_3   | Move flaps 50% (CP)      | Move flaps to 50% (CP)                          |
| 0.15 | 2_1_4   | Move flaps 50% (CP)      | Observe rudder hydraulic pressure increase (CP) |
| 0.15 | 2_1_7   | Move flaps 50% (CP)      | Observe <210 KIAS (CP)                          |
| 0.15 | 2_1_9   | Move flaps 50% (CP)      | Observe <200 KIAS (CP)                          |
| 0    | 2_1_999 | Move flaps 50% (CP)      | END                                             |
| 0    | 2_10    | Before Landing checklist | Move gear handle (CP)                           |
| 0.15 | 2_11    | Before Landing checklist | Watch hydro px (CP)                             |
| 0    | 2_12    | Before Landing checklist | Before Landing checklist (P)                    |
| 0    | 2_3     | Before Landing checklist | Level at config altitude                        |
| 0    | 2_33    | Before Landing checklist | Gear                                            |
| 0.15 | 2_34    | Before Landing checklist | verify gear/ nose wheel (CP)                    |
| 0.05 | 2_35    | Before Landing checklist | Down, indicators checked, Copilot               |
| 0.05 | 2_36    | Before Landing checklist | Pilot1                                          |
| 0.15 | 2_37    | Before Landing checklist | verify gear (P)                                 |
| 0.05 | 2_4     | Before Landing checklist | Flaps are 50% (CP)                              |
| 0    | 2_44    | Before Landing checklist | Flip landing light switches                     |
| 0    | 2_45    | Before Landing checklist | lights on point                                 |
| 0.15 | 2_49    | Before Landing checklist | verify brake swtiches/pressures (CP)            |

|          |         |                             |                                                                 |
|----------|---------|-----------------------------|-----------------------------------------------------------------|
| 0.15     | 2_5     | Before Landing checklist    | Observe <230 IAS (P)                                            |
| 0        | 2_50    | Before Landing checklist    | turn on aux pump (CP)                                           |
| 0.1      | 2_52    | Before Landing checklist    | Check for Anti- skid Error msg (CP)                             |
| 0        | 2_53    | Before Landing checklist    | Before Landing checks (CP)                                      |
| 0.05     | 2_54    | Before Landing checklist    | Complete, Copilot                                               |
| 0.05     | 2_55    | Before Landing checklist    | state setting                                                   |
| 0.05     | 2_56    | Before Landing checklist    | Load                                                            |
| 0.15     | 2_58    | Before Landing checklist    | Observe <145 KIAS (P)                                           |
| 0.05     | 2_59    | Before Landing checklist    | Flaps 100% (P)                                                  |
| 0.15     | 2_6     | Before Landing checklist    | Observe <165 KIAS (P)                                           |
| 0.15     | 2_60    | Before Landing checklist    | Observe <145 KIAS (CP)                                          |
| 0        | 2_61    | Before Landing checklist    | Move flaps to 100% (CP)                                         |
| 0.05     | 2_62    | Before Landing checklist    | Flaps tracking 100% (CP)                                        |
| 0        | 2_63    | Before Landing checklist    | Adjust throttles (P)                                            |
| 0        | 2_65    | Before Landing checklist    | slow to threshold speed (P)<br>Flaps set 100% (CP)              |
|          |         |                             | 2_68 Before Landing checklist descend @ final approach (P)      |
|          |         |                             | 2_69 Before Landing checklist adjust defensive systems (CP)     |
|          |         |                             | 2_7 Before Landing checklist Command gear down                  |
| variable | 2_67    | Before Landing checklist    | 2_70 Before Landing checklist Give winds / Clear to Land" (ATC) |
| 0.05     | 2_71    | Before Landing checklist    | Cleared to land (CP)                                            |
| 0.05     | 2_72    | Before Landing checklist    | Gear down (CP)                                                  |
| 0        | 2_73    | Before Landing checklist    | Slowdown/trim (P)                                               |
| 0.05     | 2_74    | Before Landing checklist    | 1000 Above (CP)                                                 |
| 0        | 2_79    | Before Landing checklist    | Reset HUD FPA (P)                                               |
| 0.15     | 2_8     | Before Landing checklist    | Verify <165 KIAS (CP)                                           |
| 0.05     | 2_80    | Before Landing checklist    | HUD reset X deg (P)                                             |
| 0.05     | 2_9     | Before Landing checklist    | Speed's good, gear down (CP)                                    |
| 0        | 2_999   | Before Landing checklist    | END                                                             |
| 0        | 4_0     | On the runway               | START                                                           |
| 0.05     | 4_1_0   | Airspeed/Altitude sing-song | 50 feet (CP)                                                    |
| 0        | 4_1_1   | Airspeed/Altitude sing-song | Delay                                                           |
| 0        | 4_1_10  | Airspeed/Altitude sing-song | Adjust throttles (P)                                            |
| 0.05     | 4_1_2   | Airspeed/Altitude sing-song | 40 (CP)                                                         |
| 0        | 4_1_3   | Airspeed/Altitude sing-song | Delay1                                                          |
| 0.05     | 4_1_4   | Airspeed/Altitude sing-song | 30 (CP)                                                         |
| 0        | 4_1_5   | Airspeed/Altitude sing-song | Delay2                                                          |
| 0.05     | 4_1_6   | Airspeed/Altitude sing-song | 20 (CP)                                                         |
| 0        | 4_1_7   | Airspeed/Altitude sing-song | Delay3                                                          |
| 0.05     | 4_1_8   | Airspeed/Altitude sing-song | 10 (CP)                                                         |
| 0        | 4_1_9   | Airspeed/Altitude sing-song | Adjust pitch (P)                                                |
| 0        | 4_1_999 | Airspeed/Altitude sing-song | END                                                             |

|      |          |               |                                                                  |
|------|----------|---------------|------------------------------------------------------------------|
| 0.05 | 4_10     | On the runway | Going around (P)                                                 |
| 0    | 4_100    | On the runway | Offload/Onload (LM)                                              |
| 0    | 4_102    | On the runway | Run locks (LM)                                                   |
| 0.05 | 4_103    | On the runway | Relay upload weight (LM)                                         |
| 0    | 4_104    | On the runway | Program TOLD (CP)                                                |
| 0.1  | 4_106    | On the runway | Check TOLD (P)                                                   |
| 0.05 | 4_107    | On the runway | Ready for taxi (LM)                                              |
| 0    | 4_117    | On the runway | ERO checks (CP)                                                  |
| 0.05 | 4_118    | On the runway | Complete, Load                                                   |
| 0.05 | 4_119    | On the runway | Copilot                                                          |
| 0    | 4_120    | On the runway | Release parking brake (P)                                        |
| 0.05 | 4_121    | On the runway | Clear to up speed a pair (P)                                     |
| 0.05 | 4_122    | On the runway | Inboards coming up (CP)                                          |
| 0    | 4_123    | On the runway | pull LGSi buttons (CP)2                                          |
| 0.15 | 4_125    | On the runway | Observe upspeed (CP)                                             |
| 0.2  | 4_126    | On the runway | Taxi (P)                                                         |
| 0.05 | 4_127    | On the runway | Flaps 50                                                         |
| 0.05 | 4_130    | On the runway | Flaps tracking 50% (CP)1                                         |
| 0    | 4_131    | On the runway | Move flaps to 50% (CP)1                                          |
| 0    | 4_132    | On the runway | Set take off trim (CP)                                           |
| 0    | 4_133    | On the runway | Set exterior lights (CP)                                         |
| 0    | 4_134    | On the runway | Set exterior lights (CP)1                                        |
| 0    | 4_135    | On the runway | Lights (P)                                                       |
| 0    | 4_136    | On the runway | Set exterior lights (CP)2                                        |
| 0    | 4_143_0  | Go Around     | START                                                            |
| 0    | 4_143_1  | Go Around     | Add power (P)                                                    |
| 0    | 4_143_10 | Go Around     | Turn to final                                                    |
| 0.05 | 4_143_15 | Go Around     | Announce go around / request closed (CP)                         |
| 0.05 | 4_143_16 | Go Around     | Clear to closed pattern (ATC)                                    |
| 0.05 | 4_143_17 | Go Around     | Acknowledge clearance (CP)                                       |
| 0.15 | 4_143_18 | Go Around     | Observe <145 KIAS (P)                                            |
| 0.05 | 4_143_19 | Go Around     | Flaps 100% (P)                                                   |
| 0    | 4_143_2  | Go Around     | Climb to altitude (P)                                            |
| 0.15 | 4_143_20 | Go Around     | Observe <145 KIAS (CP)                                           |
| 0    | 4_143_21 | Go Around     | Move flaps to 100% (CP)1                                         |
| 0.05 | 4_143_22 | Go Around     | Flaps tracking 100% (CP)                                         |
| 0    | 4_143_23 | Go Around     | Reduce throttles (P)1                                            |
| 0.05 | 4_143_29 | Go Around     | Report base turn w/ gear (CP)                                    |
| 0.05 | 4_143_3  | Go Around     | Flaps tracking 50% (CP)                                          |
| 0.05 | 4_143_30 | Go Around     | Give winds / "Clear to Land" (ATC)                               |
| 0.05 | 4_143_31 | Go Around     | Cleared to land (CP)                                             |
| 0    | 4_143_32 | Go Around     | Turn to closed pattern (P)                                       |
| 0.05 | 4_143_33 | Go Around     | Leaving gear and flaps, after takeoff touch and go checklist (P) |
| 0.05 | 4_143_34 | Go Around     | Checklist                                                        |
| 0    | 4_143_35 | Go Around     | Crew Briefing (P)                                                |
| 0.05 | 4_143_36 | Go Around     | Listen (CP)                                                      |
| 0    | 4_143_4  | Go Around     | Move flaps to 50% (CP)                                           |
| 0    | 4_143_40 | Go Around     | Before Landing Touch and Go Checklist (P)                        |

|      |           |               |                                      |
|------|-----------|---------------|--------------------------------------|
| 0.05 | 4_143_41  | Go Around     | Checklist (CP)1                      |
| 0.05 | 4_143_42  | Go Around     | Checklist (CP)                       |
| 0.05 | 4_143_43  | Go Around     | Checklist (P)                        |
| 0.05 | 4_143_5   | Go Around     | Flaps 50                             |
| 0    | 4_143_7   | Go Around     | Level at altitude                    |
| 0    | 4_143_9   | Go Around     | adjust throttles (P)                 |
| 0    | 4_143_999 | Go Around     | END                                  |
| 0.05 | 4_144     | On the runway | Give taxi instructions               |
| 0.05 | 4_145     | On the runway | Read back (CP)                       |
| 0    | 4_146     | On the runway | Coordinate departure (CP)            |
| 0.05 | 4_147     | On the runway | Coordinate departure (ATC)           |
| 0    | 4_148     | On the runway | Request taxi (CP)                    |
| 0.05 | 4_149     | On the runway | Give taxi instructions               |
| 0.05 | 4_150     | On the runway | Read back (CP)1                      |
| 0.05 | 4_151     | On the runway | Listen (CP)                          |
| 0.05 | 4_152     | On the runway | Def Sys set Stby (CP)                |
| 0    | 4_153     | On the runway | Test open Swing window (P)           |
| 0    | 4_154     | On the runway | Program CNI-MU                       |
| 0    | 4_155     | On the runway | Configure HUD/REF MODE/CNBP/AMU (CP) |
| 0    | 4_156     | On the runway | Configure HUD/REF MODE/CNBP/AMU (P)  |
| 0.05 | 4_157     | On the runway | Hotel Mode (CP)                      |
| 0    | 4_158     | On the runway | Propeller control switches (CP)      |
| 0.15 | 4_159     | On the runway | Observe downspeed (CP)2              |
| 0    | 4_160     | On the runway | Propeller control switches (CP)1     |
| 0.15 | 4_161     | On the runway | Observe upspeed (CP)                 |
| 0.05 | 4_162     | On the runway | Departure setup, complete Copilot    |
| 0.05 | 4_163     | On the runway | Pilot                                |
| 0.05 | 4_164     | On the runway | CNI-MU checked Copilot               |
| 0.05 | 4_165     | On the runway | Pilot1                               |
| 0.05 | 4_166     | On the runway | Listen (CP)1                         |
| 0    | 4_167     | On the runway | Departure briefing (CP)              |
| 0    | 4_168     | On the runway | Brief crew (P)1                      |
| 0.05 | 4_169     | On the runway | complete (P)1                        |
| 0    | 4_170     | On the runway | Shut down APU (CP)                   |
| 0    | 4_171     | On the runway | Set APU/ electrical panel (CP)1      |
| 0    | 4_172     | On the runway | Arm defensive system (CP)1           |
| 0.05 | 4_173     | On the runway | Def Sys set Stby (CP)1               |
| 0.15 | 4_174     | On the runway | Look at brake panel (CP)             |
| 0.05 | 4_175     | On the runway | Brakes set normal (CP)               |
| 0.05 | 4_176     | On the runway | LGSi switches set, normal (CP)       |
| 0.15 | 4_177     | On the runway | Look at flap gauge (CP)              |
| 0.05 | 4_178     | On the runway | Flaps set 50% (CP)                   |
| 0.15 | 4_179     | On the runway | Look at trim gauge (CP)              |
| 0.05 | 4_180     | On the runway | Trim set (CP)                        |
| 0.2  | 4_2       | On the runway | Observe aimpoint (CP)                |
| 0.2  | 4_29      | On the runway | Check for asymmetric thrust (P)      |
| 0.05 | 4_3       | On the runway | direct pilot corrections (CP)        |
| 0.15 | 4_30      | On the runway | Observe BETA indication (CP)         |



|      |      |               |                                    |
|------|------|---------------|------------------------------------|
| 0.05 | 4_31 | On the runway | 4 B's (CP)                         |
| 0    | 4_32 | On the runway | Apply brakes (P)                   |
| 0.15 | 4_33 | On the runway | Verify <145 KTAS                   |
| 0.15 | 4_34 | On the runway | Verify <145 KIAS (CP)              |
| 0.05 | 4_35 | On the runway | Copilot's yoke (P)                 |
| 0.05 | 4_36 | On the runway | Copilot's yoke (CP)                |
| 0.2  | 4_37 | On the runway | Maintain wings level (CP)          |
| 0    | 4_38 | On the runway | Steer with tiller wheel (P)        |
| 0    | 4_39 | On the runway | Move throttles to Max reverse (P)  |
| 0.2  | 4_4  | On the runway | Make corrections (P)               |
| 0.15 | 4_40 | On the runway | Observe 60 KIAS (CP)               |
| 0.05 | 4_41 | On the runway | 60 (CP)                            |
| 0    | 4_42 | On the runway | Move throttles out of reverse (P)  |
| 0.05 | 4_43 | On the runway | 40 (CP)                            |
| 0    | 4_44 | On the runway | Throttles-ground idle (P)1         |
| 0.2  | 4_45 | On the runway | Slow to taxi speed (P)             |
| 0.05 | 4_46 | On the runway | Clear to down- speed outboards (P) |
| 0.15 | 4_47 | On the runway | verify <30 knots (CP)              |
| 0.05 | 4_48 | On the runway | Outboards coming down (CP)         |
| 0    | 4_49 | On the runway | press LGSI buttons (CP)            |
| 0    | 4_5  | On the runway | Reduce throttles (P)               |
| 0.15 | 4_51 | On the runway | Observe downspeed (CP)             |
| 0    | 4_52 | On the runway | Start APU (CP)                     |
| 0    | 4_53 | On the runway | ERO Ops stop checklist             |
| 0    | 4_54 | On the runway | Safe defensive system (CP)         |
| 0    | 4_56 | On the runway | Set AC 'No Press' (CP)             |
| 0    | 4_57 | On the runway | Clear to open ramp/door (P)        |
| 0.2  | 4_6  | On the runway | Flare aircraft (P)                 |
| 0    | 4_60 | On the runway | Set APU/ electrical panel (CP)     |
| 0.05 | 4_61 | On the runway | Clear to down speed inboards? (CP) |
| 0    | 4_62 | On the runway | Roger (LM)                         |
| 0    | 4_63 | On the runway | Open ramp/door (LM)                |
| 0.1  | 4_64 | On the runway | Observe door open light (P)        |
| 0    | 4_65 | On the runway | Clear (P)                          |
| 0.05 | 4_66 | On the runway | Inboards coming down (CP)1         |
| 0    | 4_67 | On the runway | press LGSI buttons (CP)1           |
| 0.15 | 4_69 | On the runway | Observe downspeed (CP)1            |
| 0    | 4_7  | On the runway | Throttles- ground idle (P)         |
| 0.2  | 4_71 | On the runway | Turn off of runway (P)             |
| 0    | 4_72 | On the runway | Crew briefing (CP)                 |
| 0.05 | 4_73 | On the runway | Brief crew (P)                     |
| 0.2  | 4_74 | On the runway | Taxi to park (P)                   |
| 0.2  | 4_75 | On the runway | Brake to stop (P)                  |
| 0.05 | 4_76 | On the runway | complete (P)                       |
| 0    | 4_77 | On the runway | Set parking brake (P)              |
| 0.2  | 4_8  | On the runway | Touchdown                          |
| 0.05 | 4_9  | On the runway | Go around (CP)                     |
| 0    | 4_98 | On the runway | Offload/Onload clearance (CP)      |

|      |       |               |                             |
|------|-------|---------------|-----------------------------|
| 0.05 | 4_99  | On the runway | Clear to offload/onload (P) |
| 0    | 4_999 | On the runway | END                         |
| 0    |       | 8 (Root)      | Give Posit (CP)             |
| 0.05 |       | 9 (Root)      | Request posit (ATC)         |
| 0    |       | 999 (Root)    | Model END                   |

## Appendix E: UML Activity Diagrams


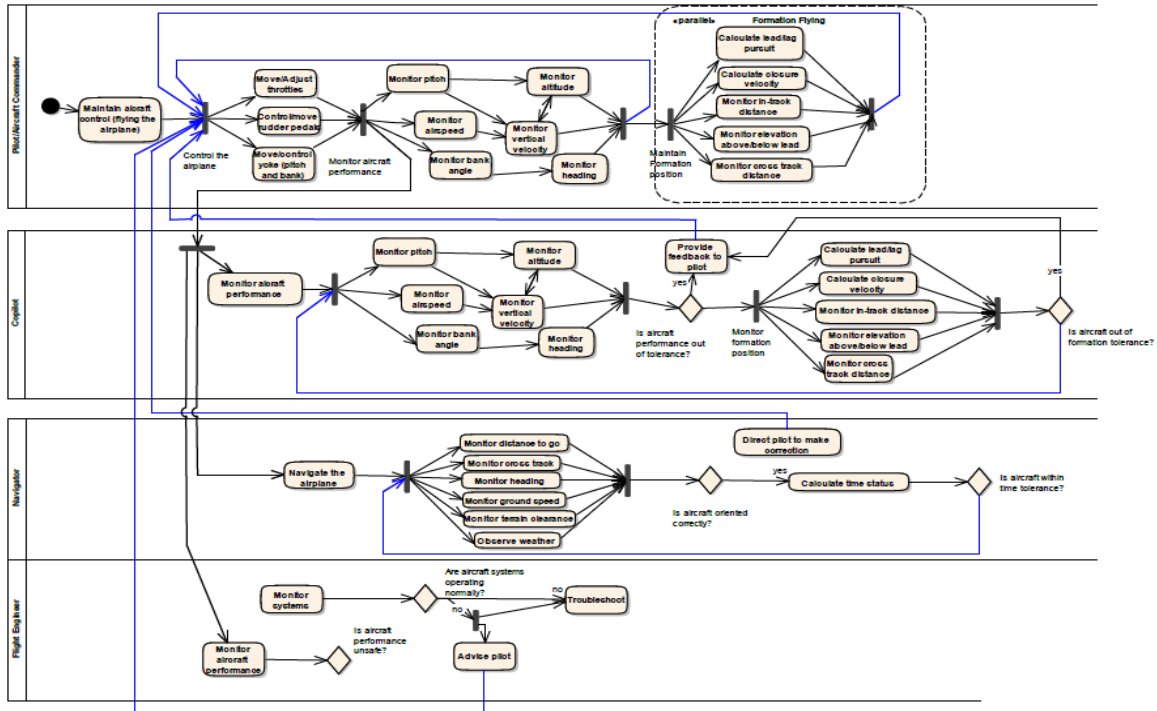


Figure 36: Basic Aircraft Control UML Activity Diagram

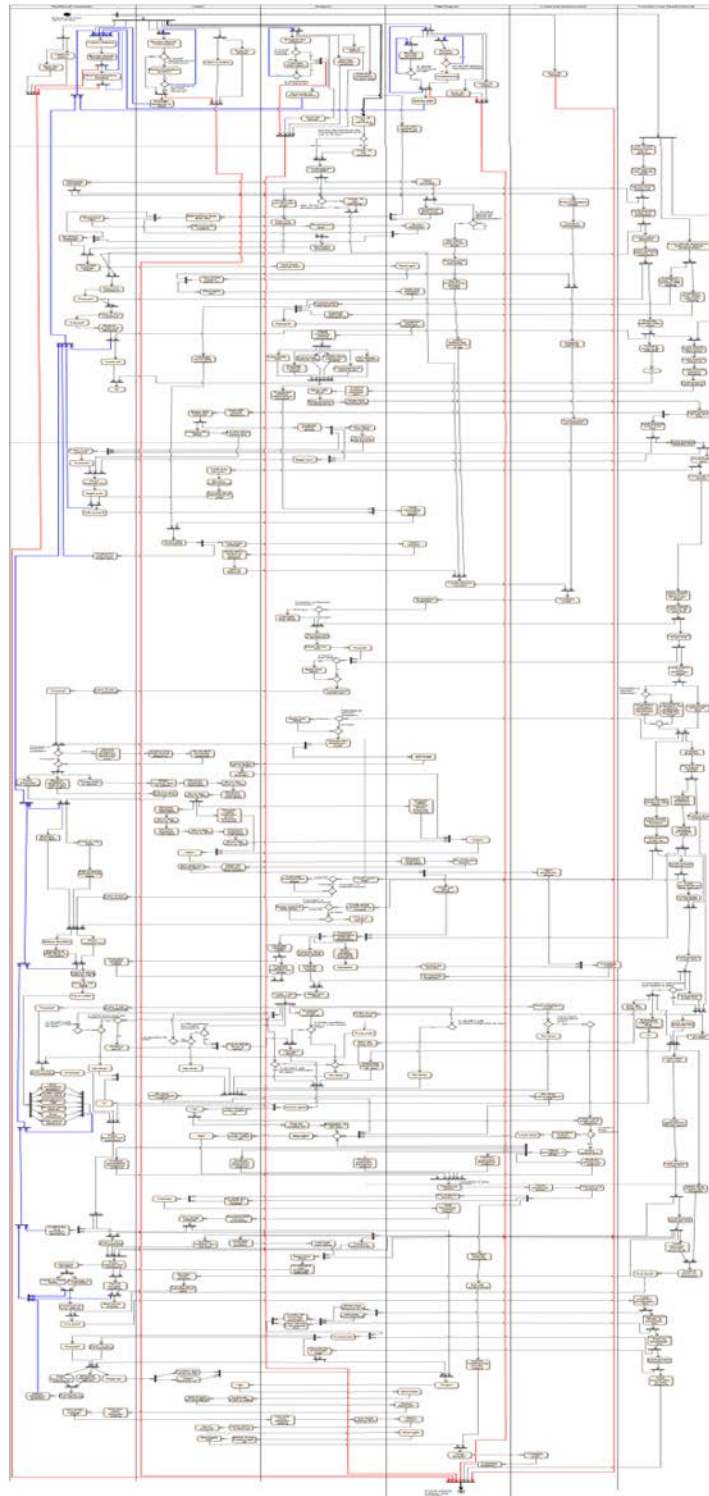

**Figure 37: SKE Formation Airdrop UML Activity Diagram**

## Appendix F: IMPRINT Task Networks

### Basic Aircraft Control

#### *C-130H*

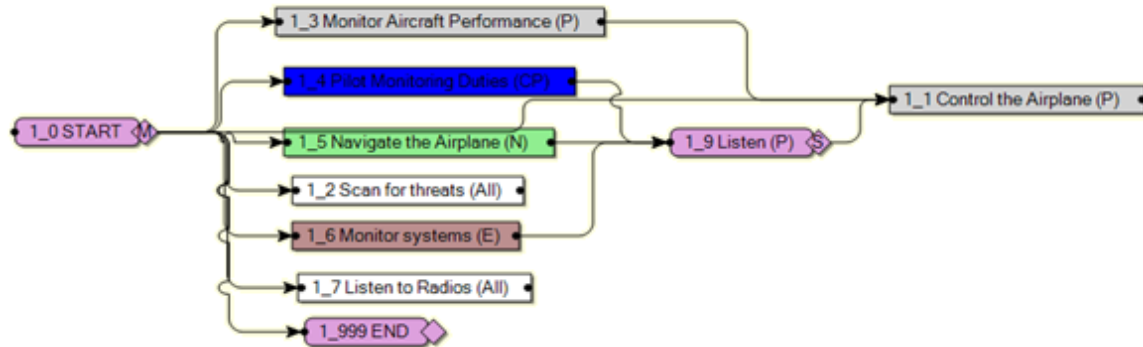


Figure 38: Basic Aircraft Control Task Network (C-130H)

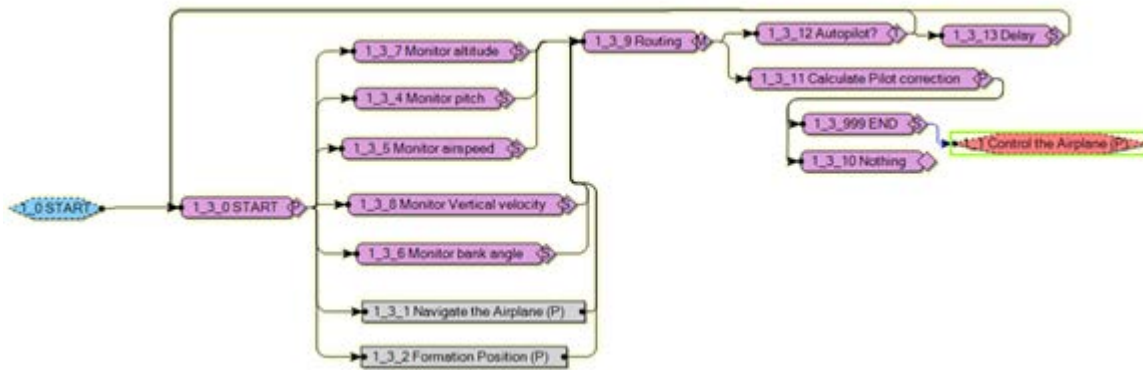


Figure 39: Monitor Aircraft Performance (P) Function (C-130H)

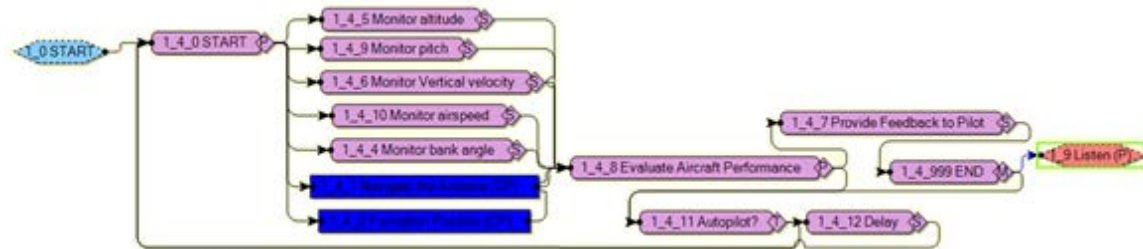


Figure 40: Pilot Monitoring Duties (CP) Function (C-130H)

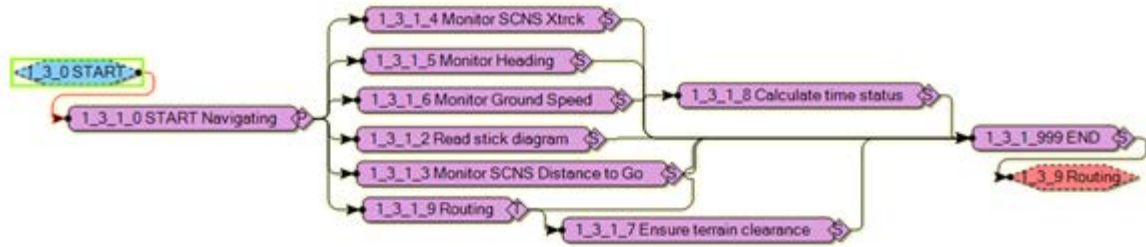


Figure 41: Navigate the Airplane (P/CP) Function (C-130H)

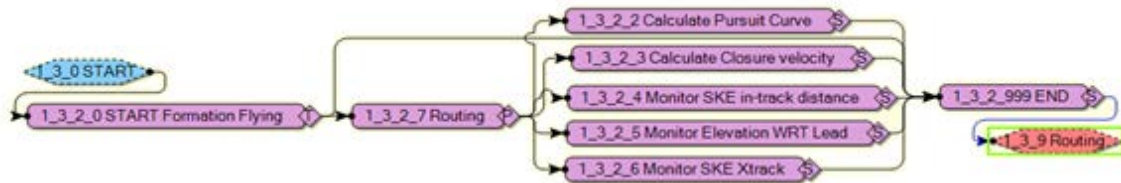


Figure 42: Formation Position (P/CP) Function (C-130H)

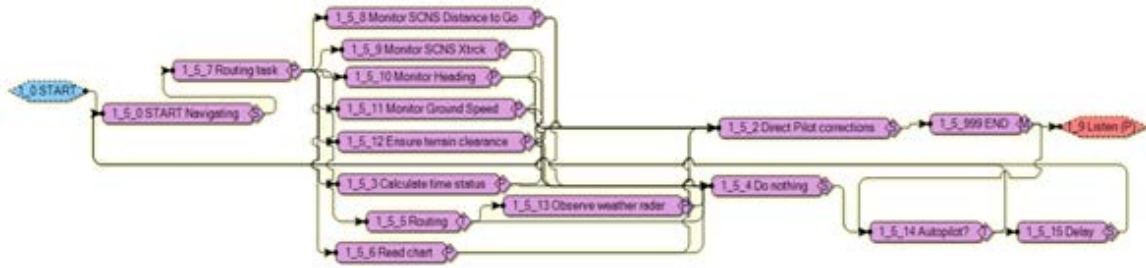


Figure 43: Navigate the Airplane (N) Function (C-130H)

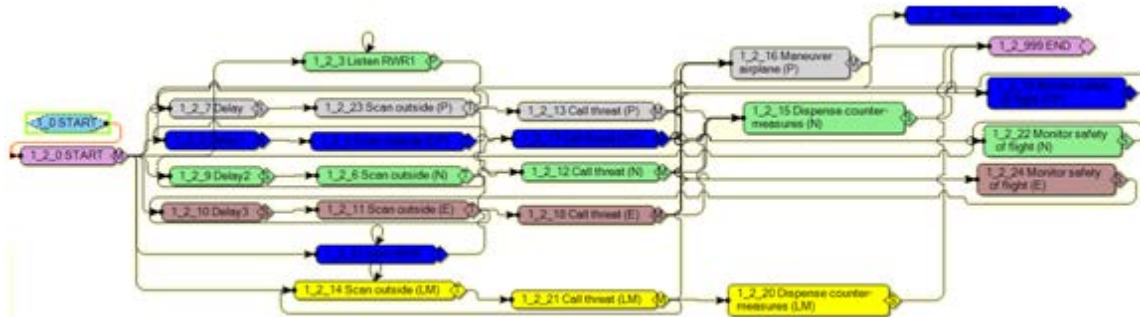


Figure 44: Scan for Threats Function (C-130H)

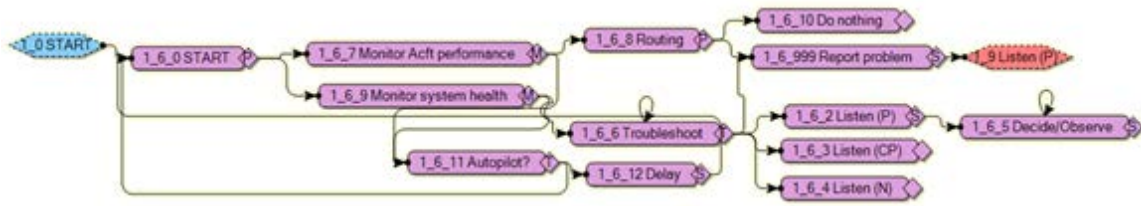


Figure 45: Monitor Systems (E) Function (C-130H)

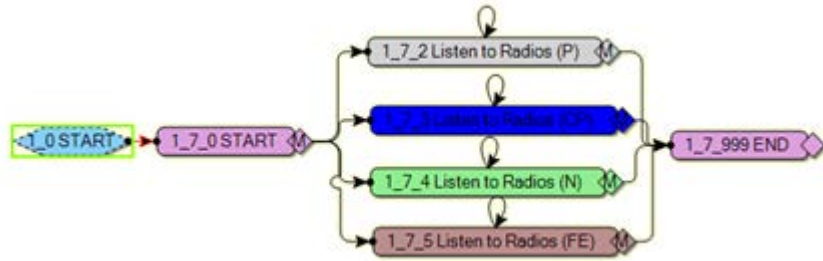


Figure 46: Listen to Radios Function (C-130H)

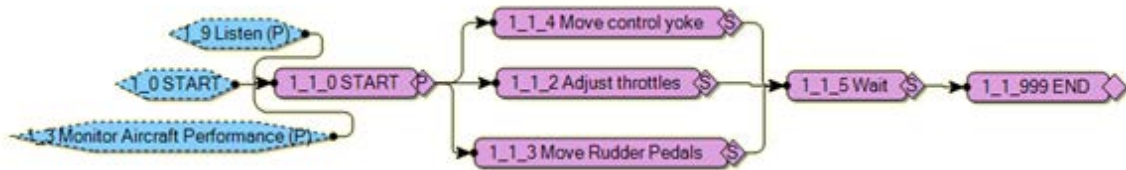


Figure 47: Control the Airplane (P) Function (C-130H)

*C-130J*

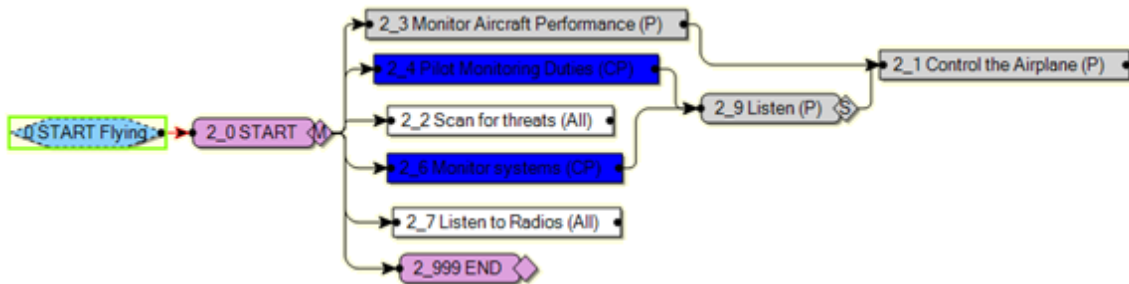


Figure 48: Basic Aircraft Control Task Network (C-130J)



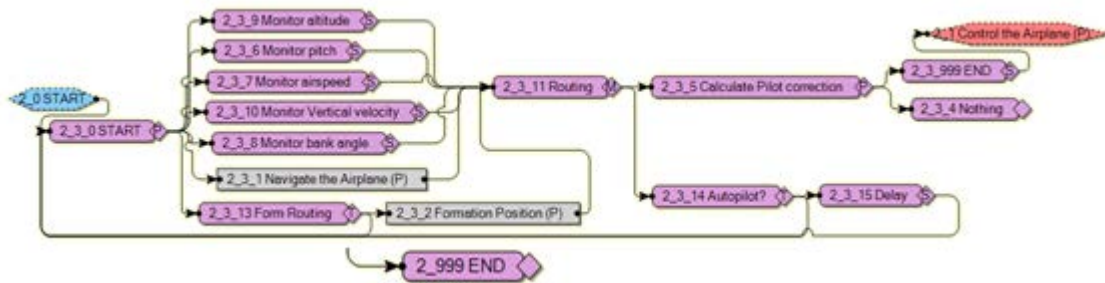


Figure 49: Monitor Aircraft Performance (P) Function (C-130J)

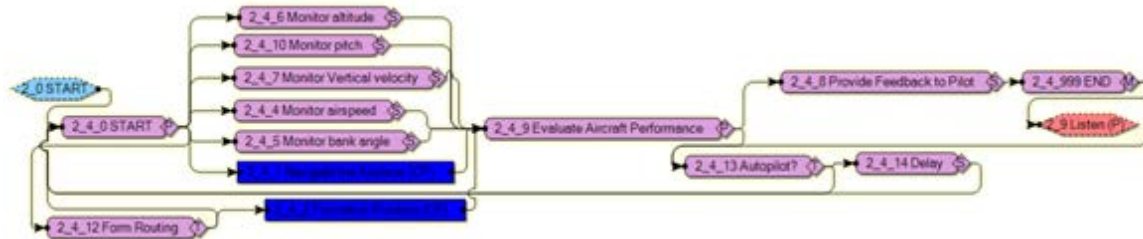


Figure 50: Pilot Monitoring Duties (CP) Function (C-130J)



Figure 51: Navigate the Airplane (P/CP) Function (C-130J)

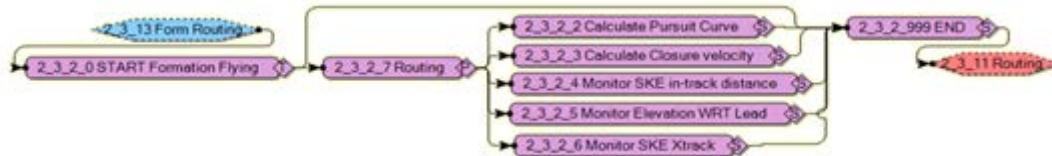


Figure 52: Formation Position (P/CP) Function (C-130J)



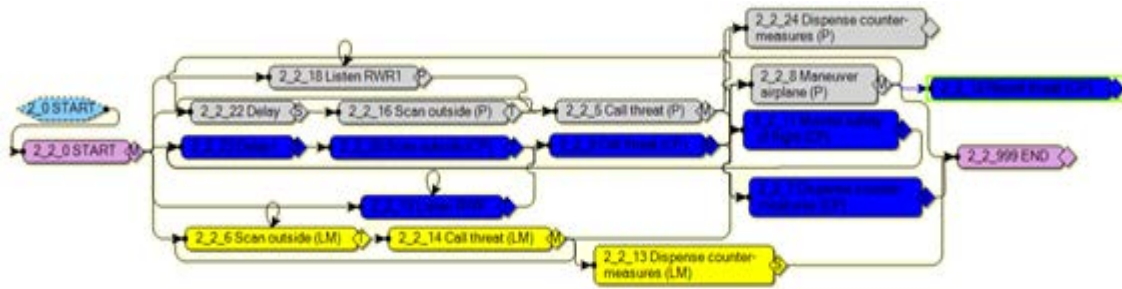


Figure 53: Scan for Threats Function (C-130J)

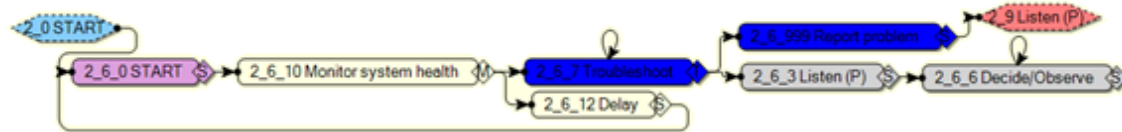


Figure 54: Monitor Systems (C-130J)



Figure 55: Listen to Radios Function (C-130J)

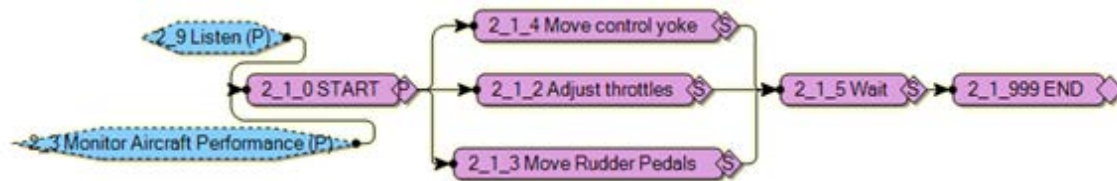


Figure 56: Control the Airplane (P) Function (C-130J)

## SKE Formation Airdrop Scenario

### C-130H

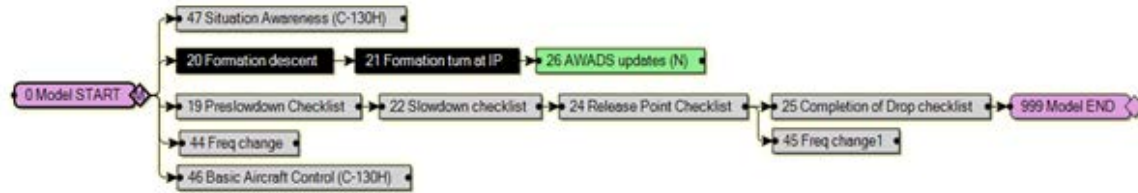


Figure 57: SKE Formation Airdrop Task Network (C-130H)

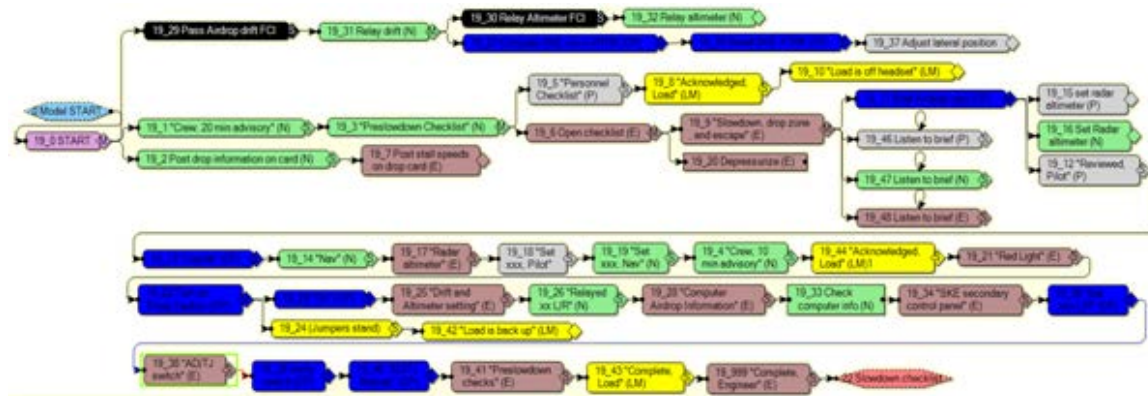


Figure 58: Preslowdown Checklist (C-130H)

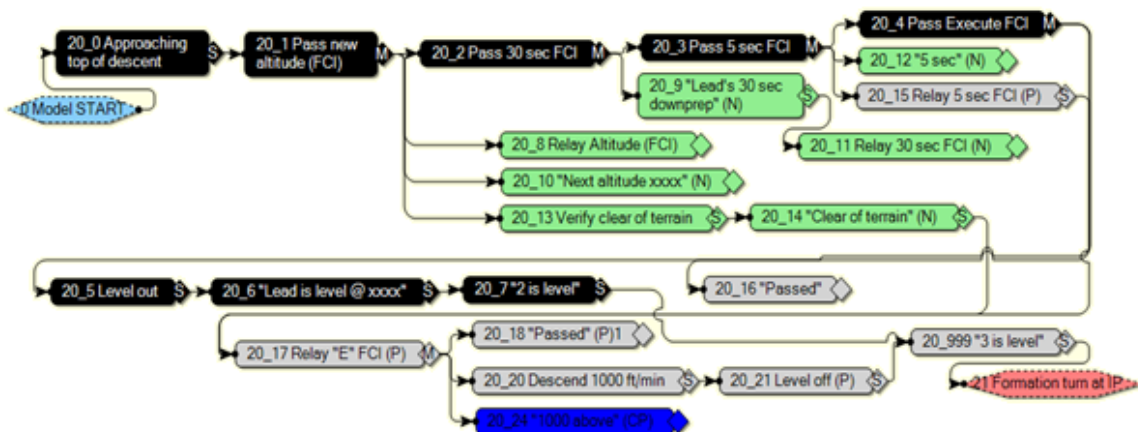


Figure 59: Formation Descent Function (C-130H)

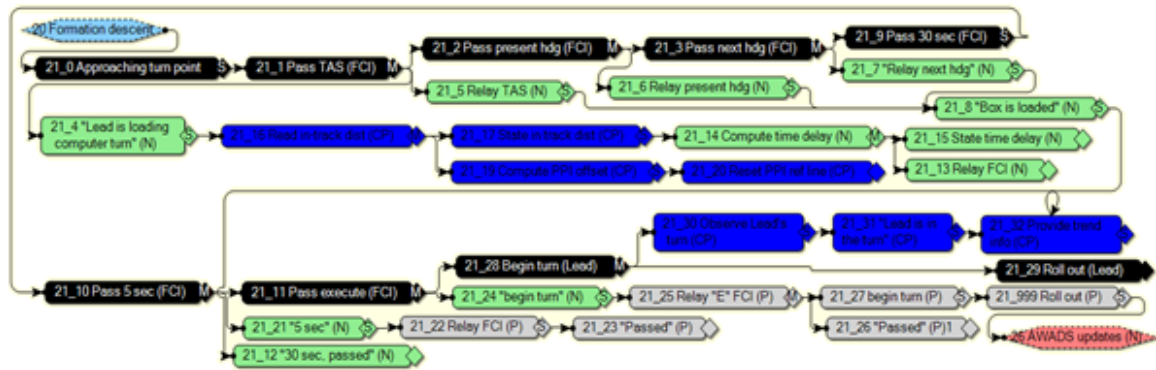


Figure 60: Formation Turn at IP (C-130H)

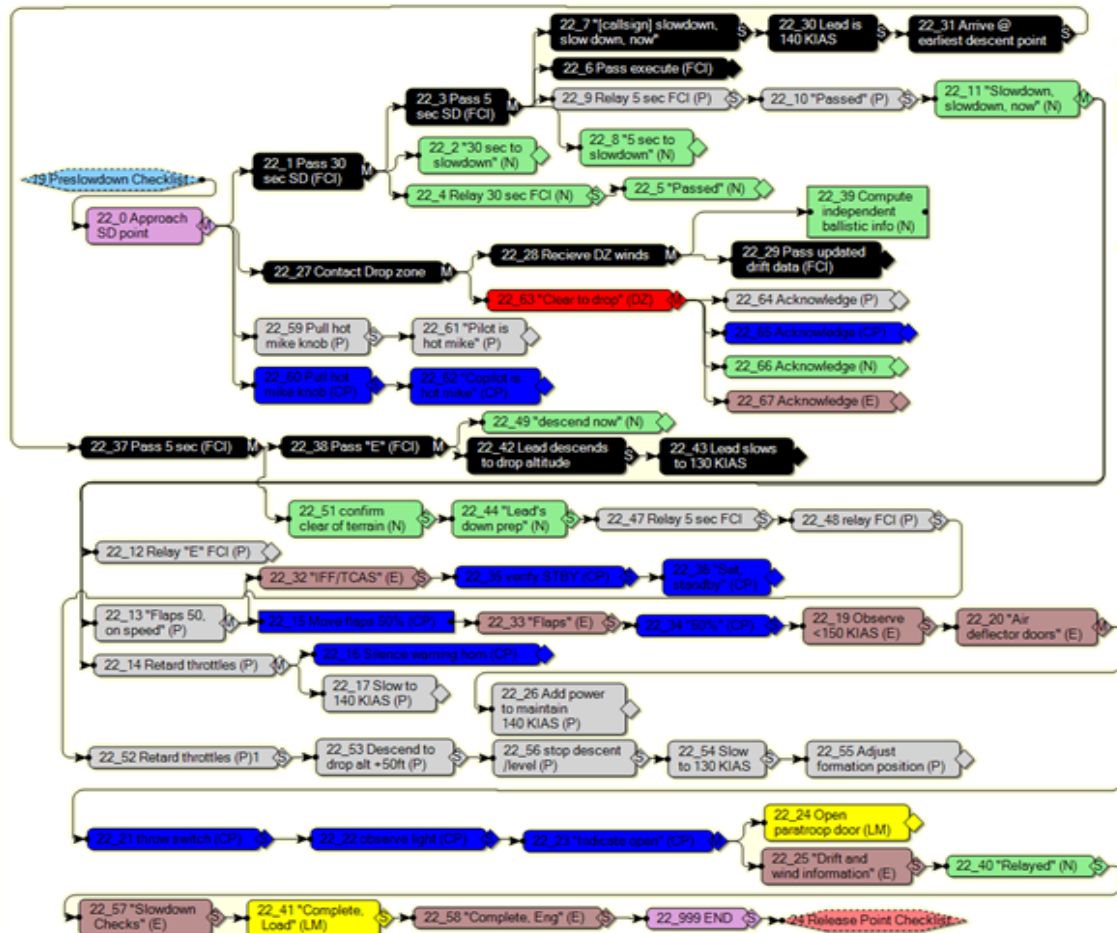


Figure 61: Slowdown Checklist (C-130H)



Figure 62: AWADS Update (N) Function (C-130H)

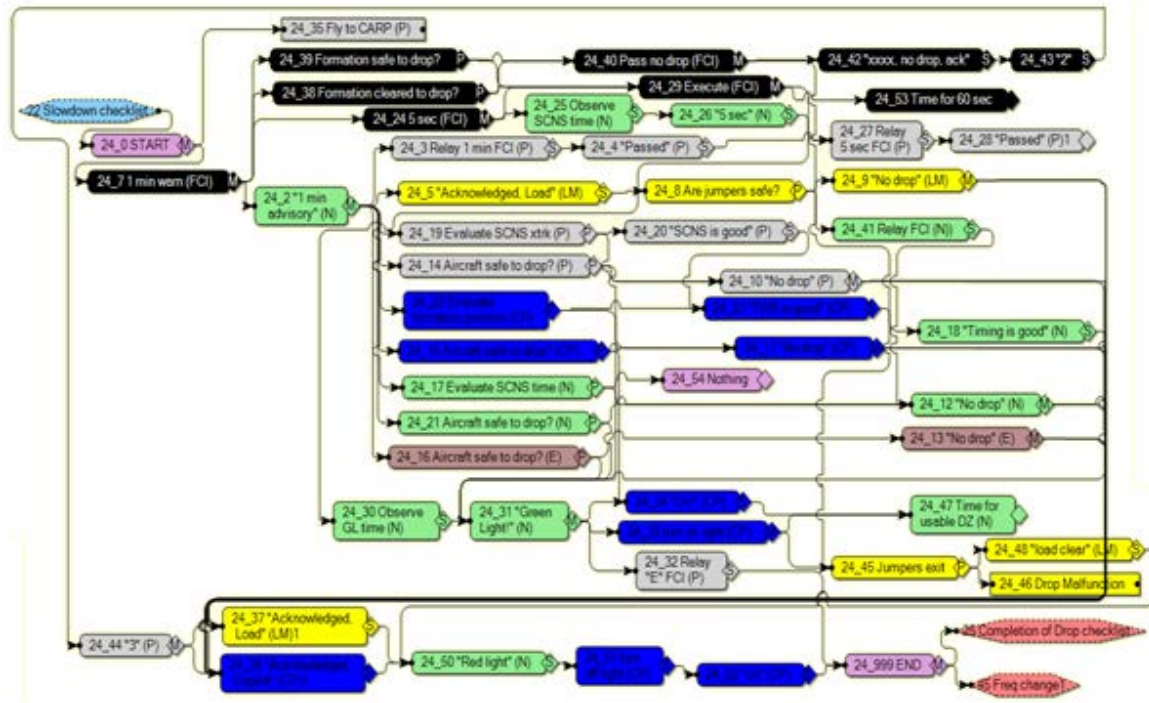


Figure 63: Release Point Checklist (C-130H)



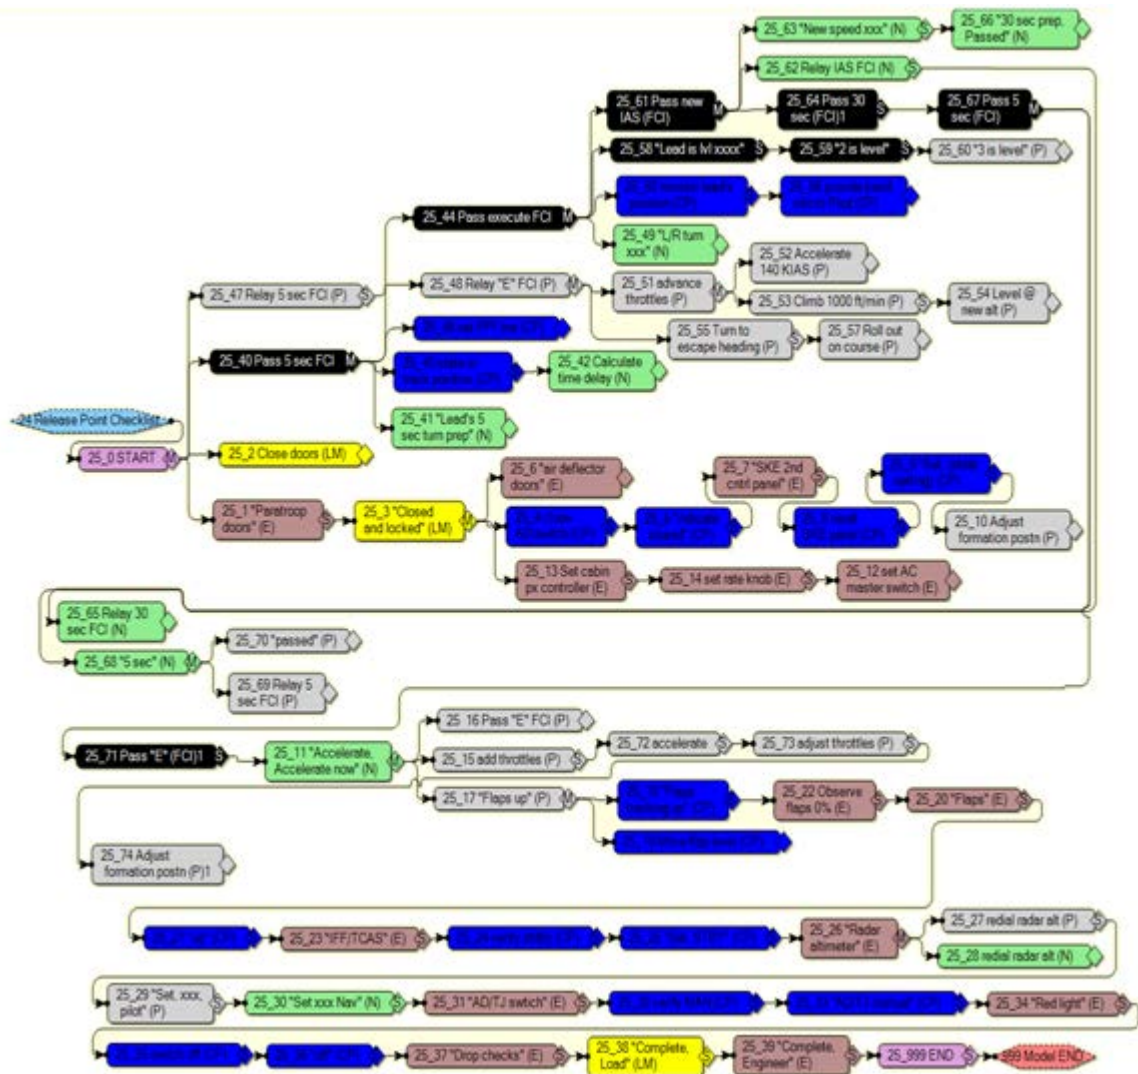


Figure 64: Completion of Drop Checklist (C-130H)



Figure 65: Frequency Change Function (C-130H)

## C-130J

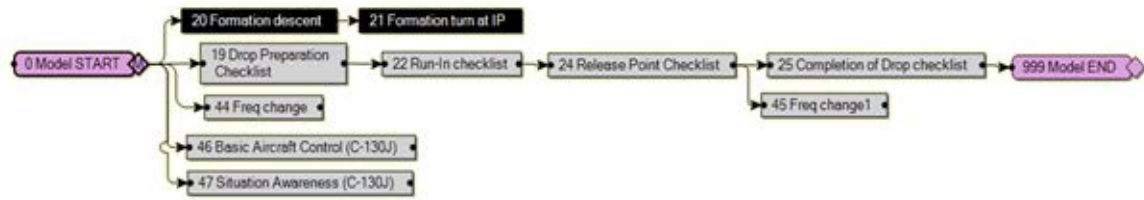


Figure 66: SKE Formation Airdrop Task Network (C-130J)

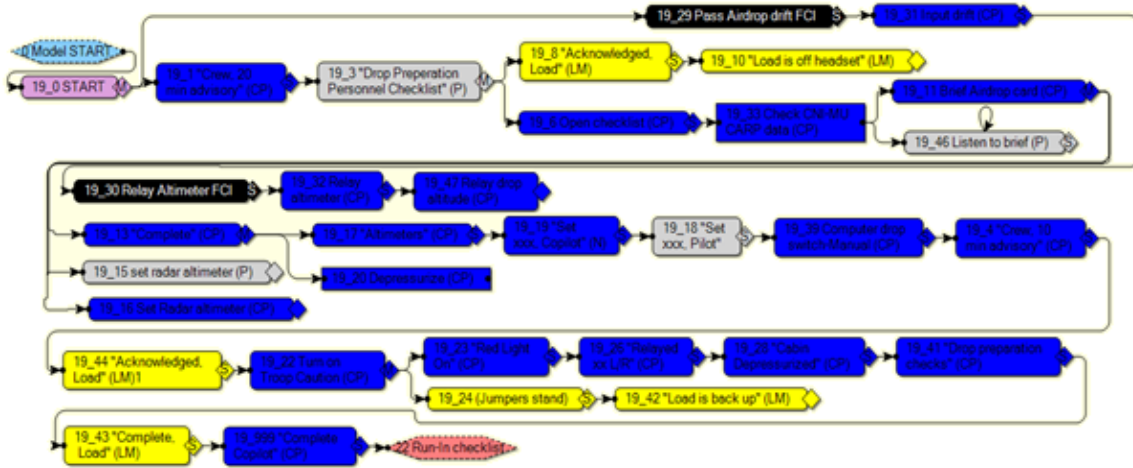


Figure 67: Drop Preparation Checklist (C-130J)

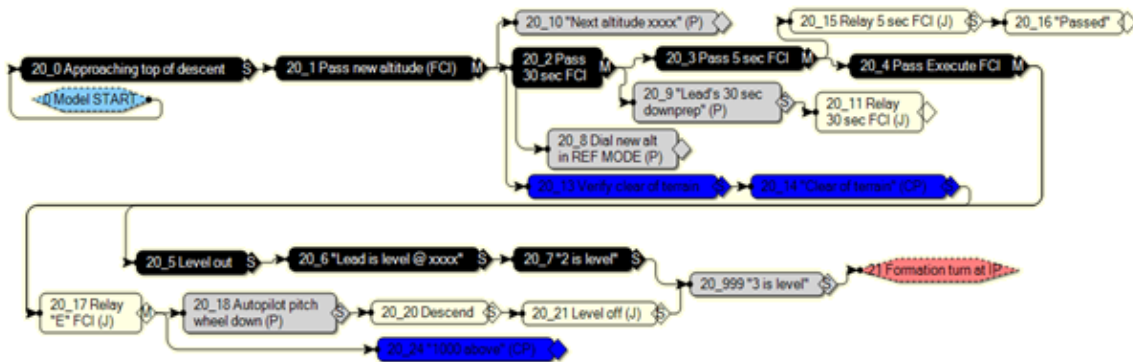


Figure 68: Formation Descent Function (C-130J)

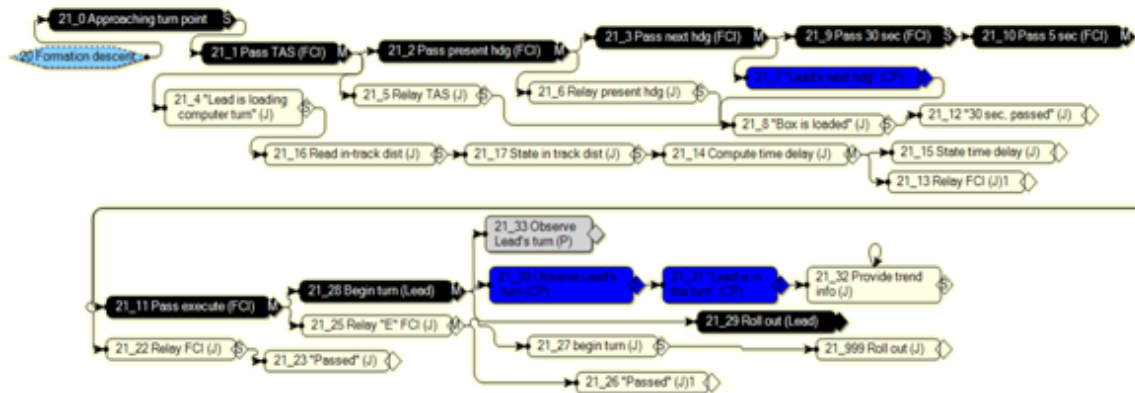


Figure 69: Formation Turn at IP (C-130J)

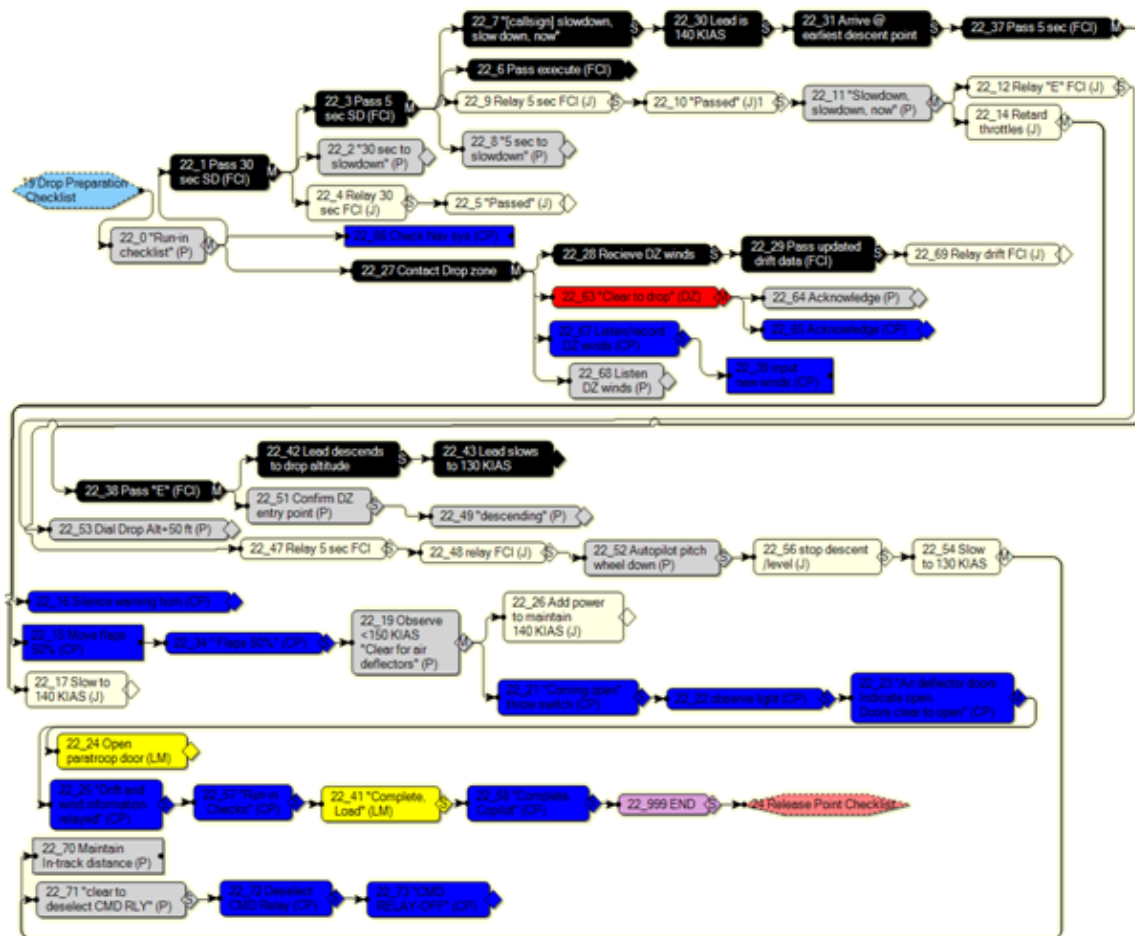


Figure 70: Run-In Checklist (C-130J)

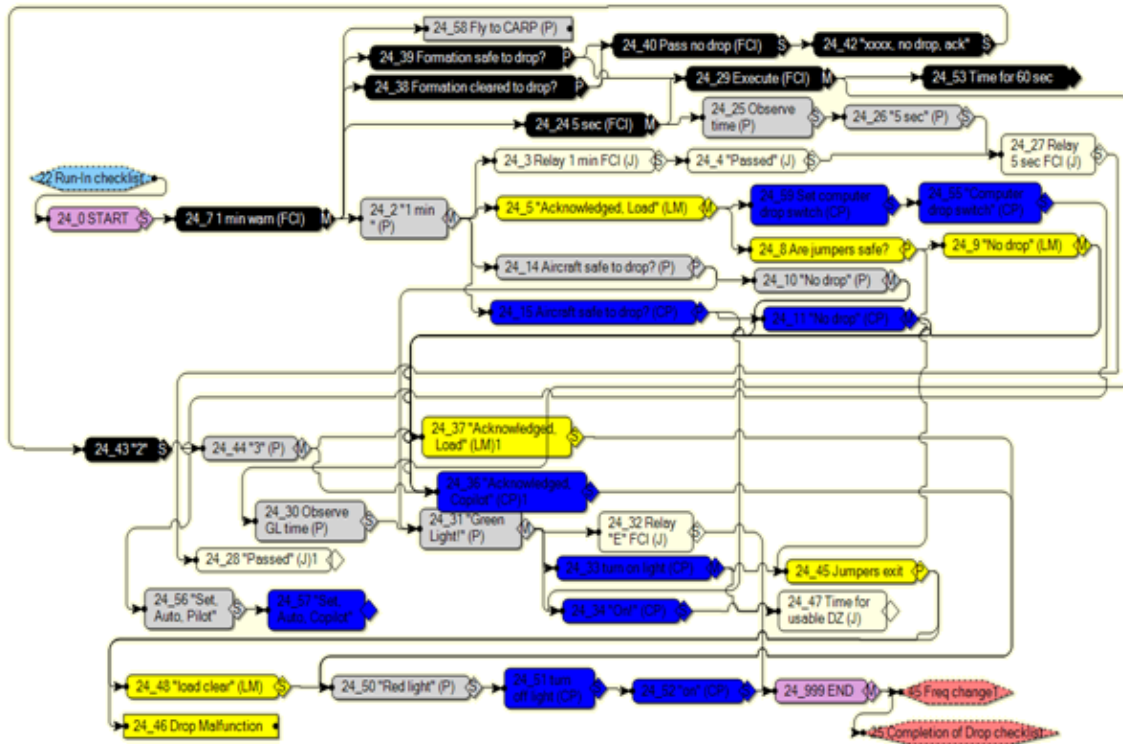


Figure 71: Release Point Checklist (C-130J)



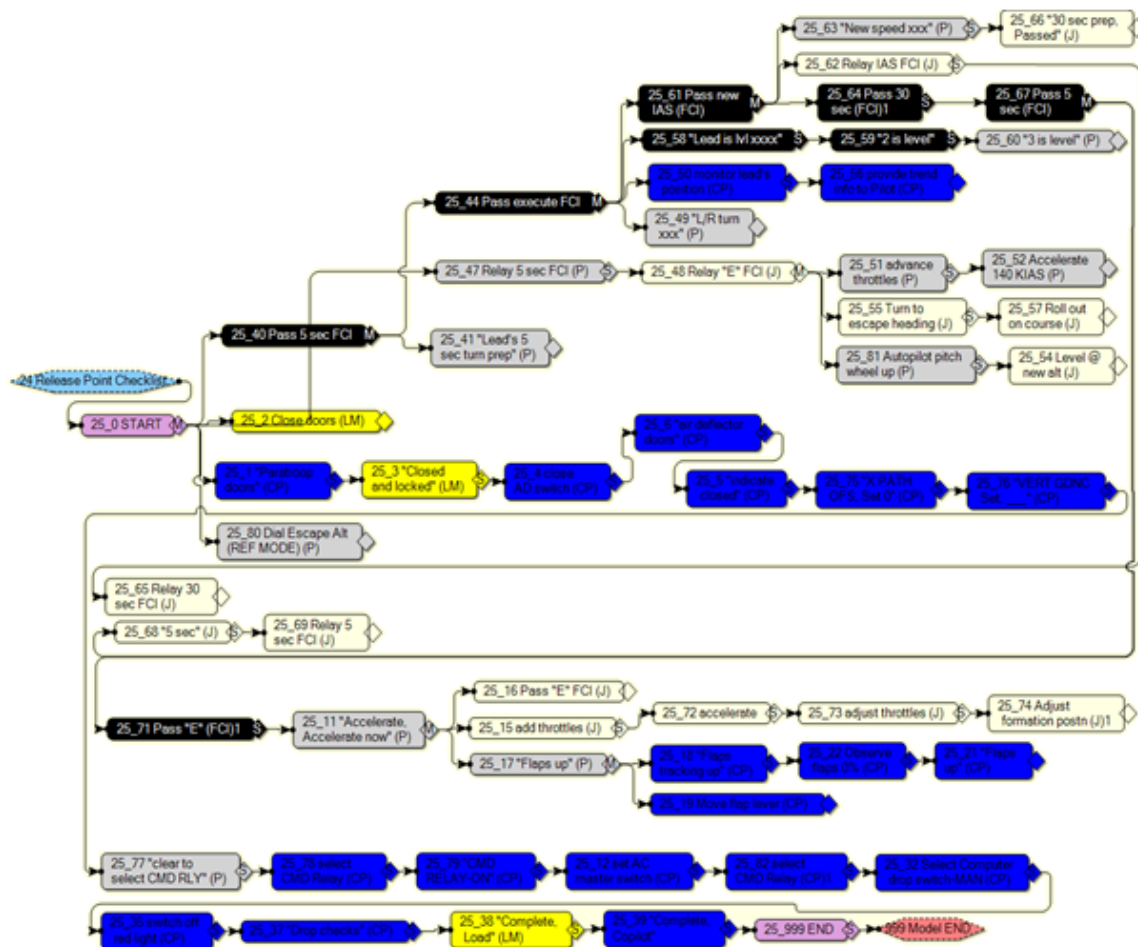


Figure 72: Completion of Drop Checklist



Figure 73: Frequency Change Function (C-130J)

***C-130H***



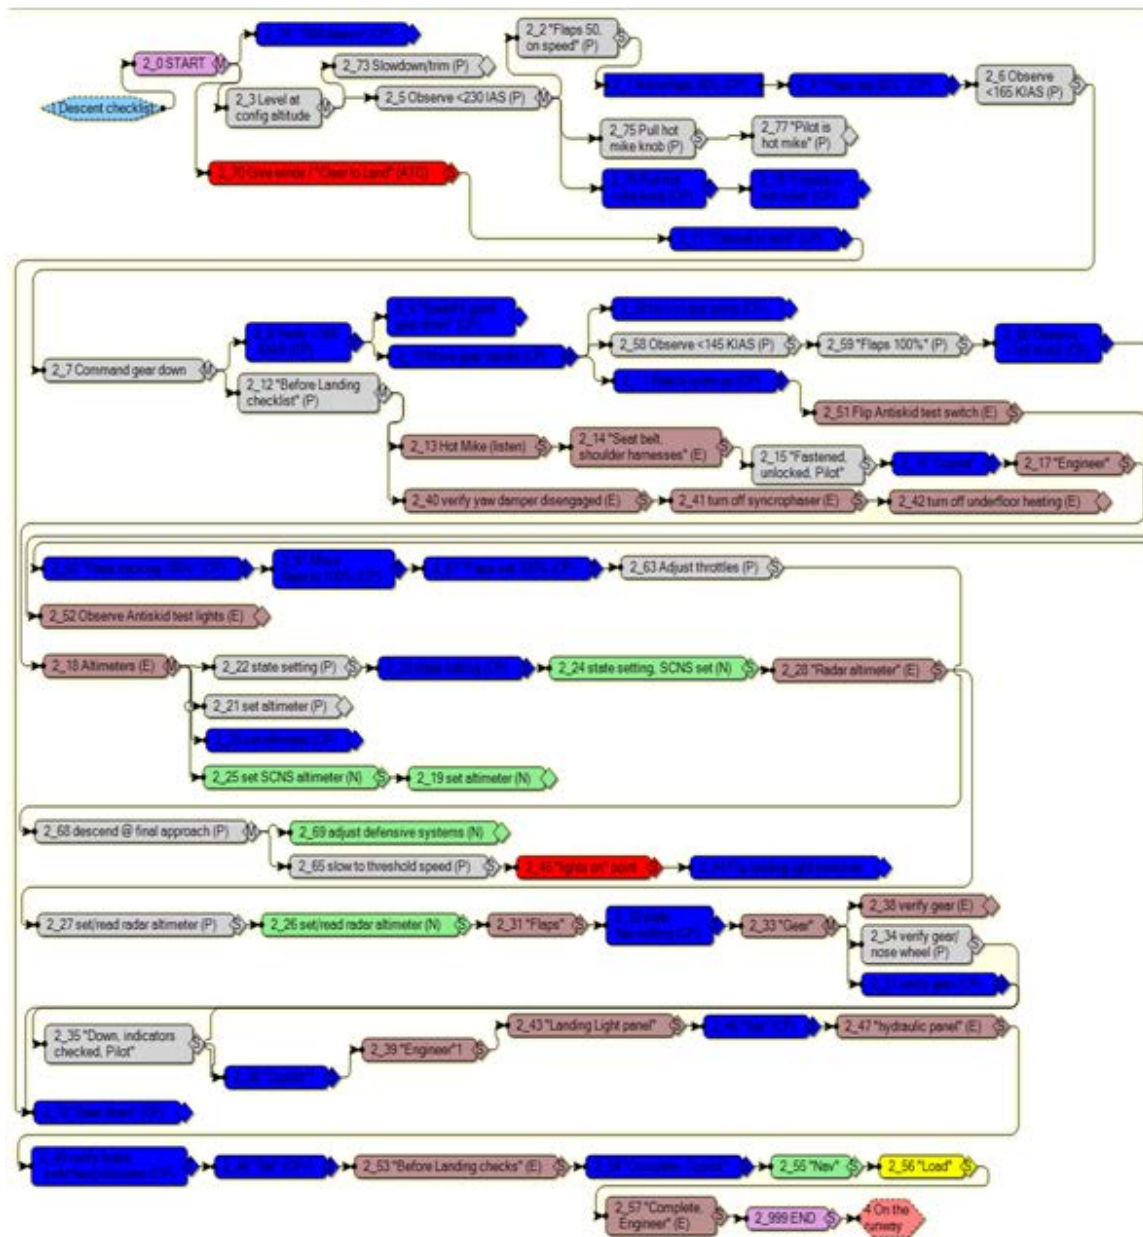


Figure 76: Before Landing Checklist (C-130H)

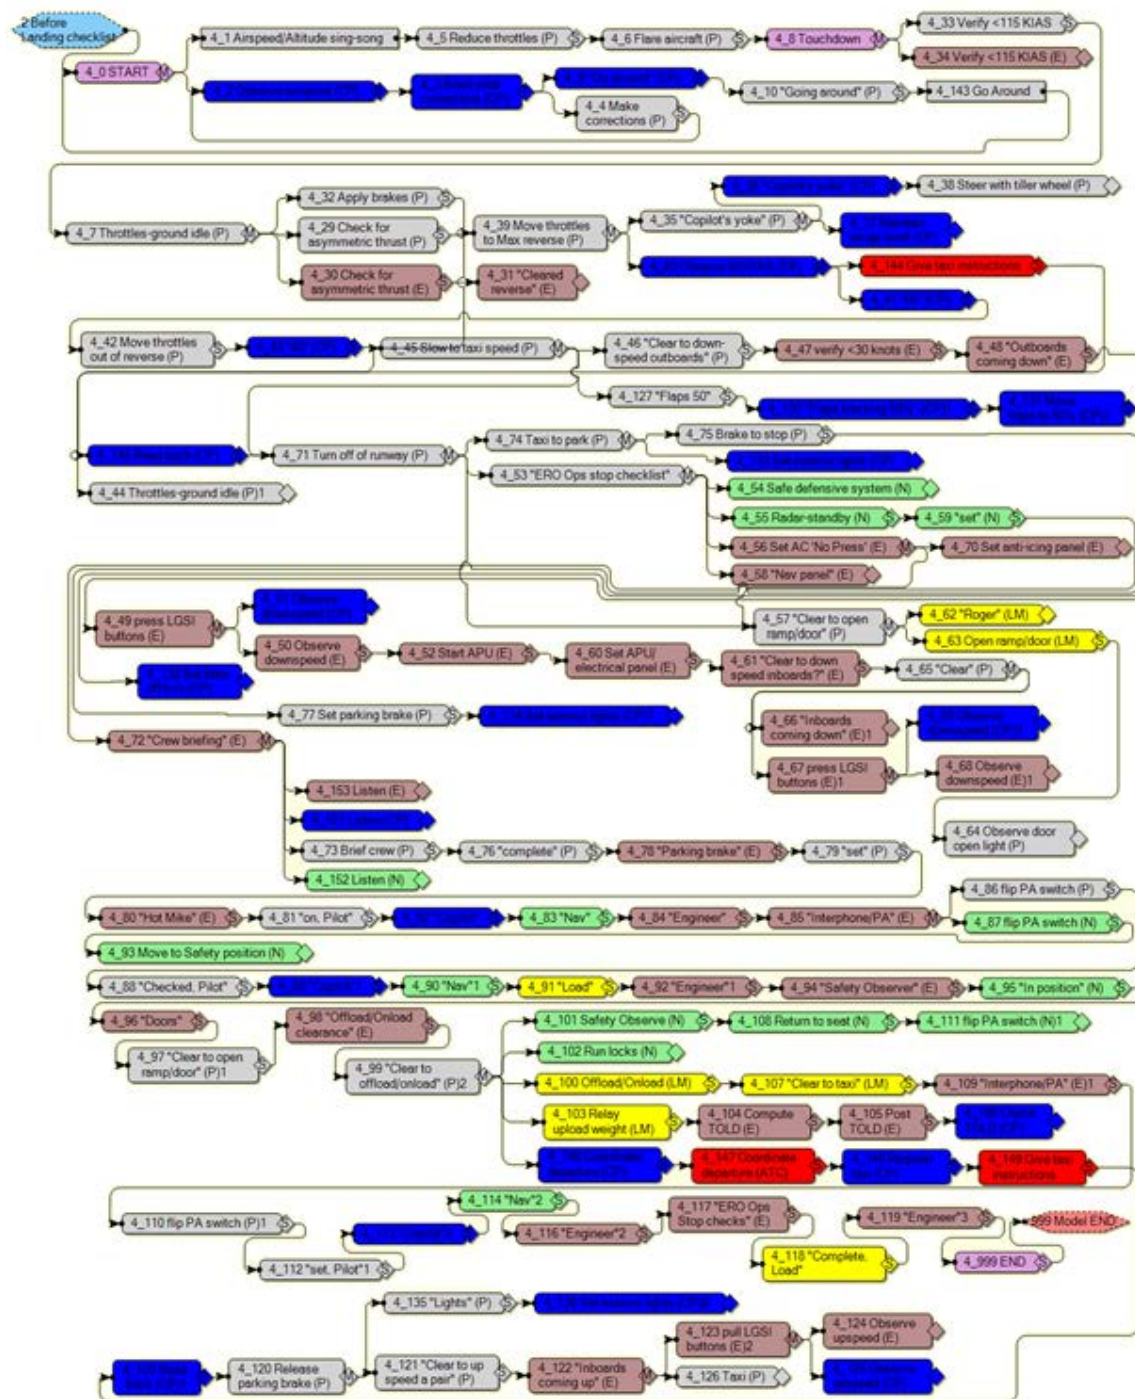


Figure 77: On the Runway Function (C-130H)



## C-130J

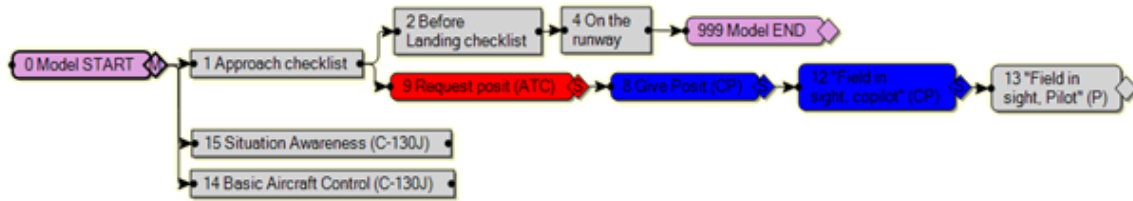


Figure 78: Maximum Effort Airland Task Network (C-130J)

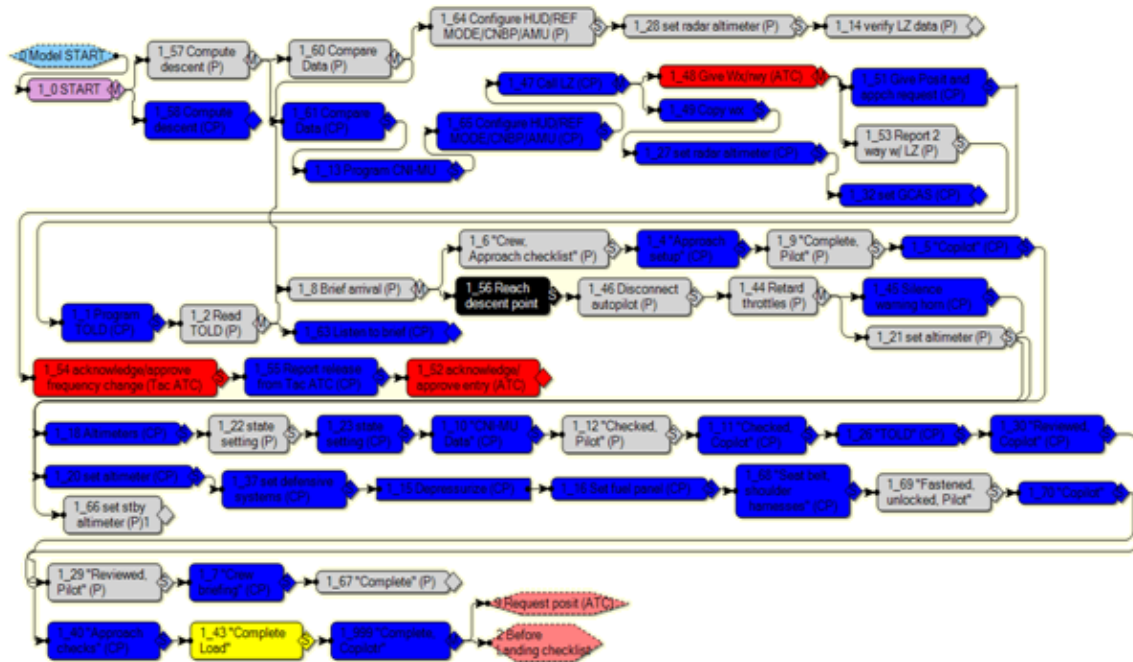


Figure 79: Approach Checklist (C-130J)



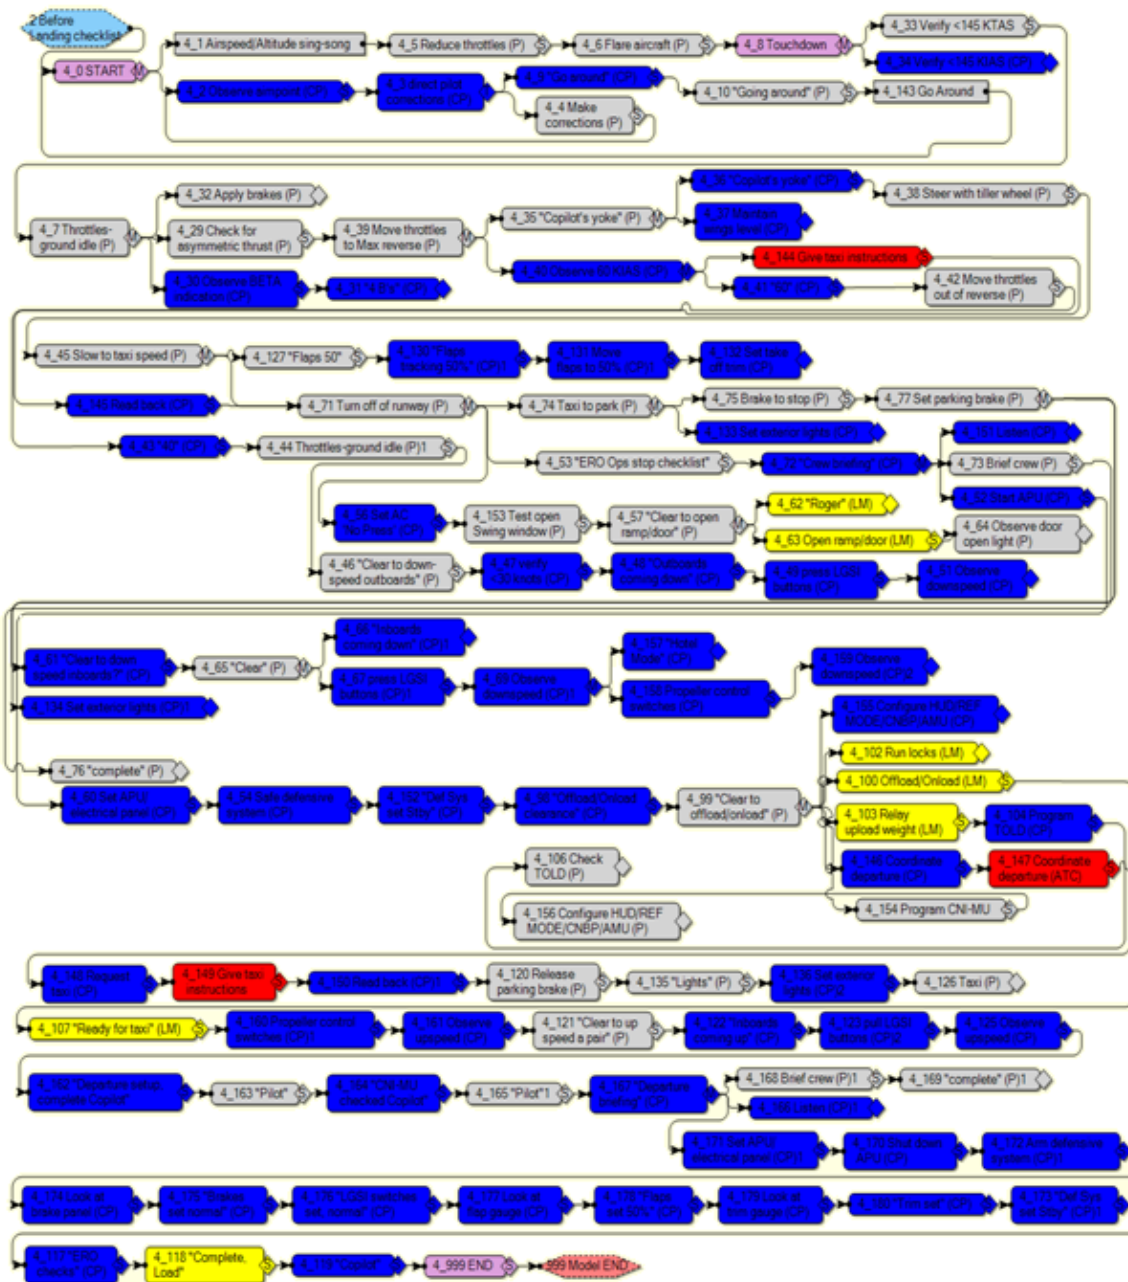


Figure 81: On the Runway Function (C-130J)

## Bibliography

- (*AFDD 1*) *Air Force Doctrine* (Vol. I: Basic Doctrine). (2015). Maxwell AFB: Curtis E. Lemay Center.
- (*AFDD 3*) *Air Force Doctrine* (Vol. III: Command). (2013). Maxwell AFB: Curtis E. Lemay Center.
- (*AFDD 4*) *Air Force Doctrine* (Vol. IV: Operations). (2013). Maxwell AFB: Curtis E. Lemay Center.
- (2005). (*AFI 11-231*) *Air Force Instruction 11-231, Flying Operations: Computed Air Release Procedures*. Washington, D.C.: United States Air Force.
- (*AFI 11-2C-130*) *Flying Operations: C-130 Operations Procedures* (Vol. 3). (2010). Washington, D.C.: US Air Force.
- (*AFI 11-2C-130, Vol 1*) *Flying Operations: C-130 Aircrew Training* (Vol. 1). (2010). Washington DC: United States Air Force.
- (*AFI 11-2C-130, Vol. 2*) *Flying Operations: C-130 Aircrew Evaluation Criteria* (Vol. 2). (2014). Washington, D.C.: United States Air Force.
- (*AFI 11-2C-130J*) *Flying Operations: C-130J Operations Procedures* (Vol. 3). (2009). Washington, D.C.: United States Air Force.
- (*AFI 13-217*) *Drop Zone and Landing Zone Operations*. (2007). Washington, D.C.: United States Air Force.
- (*AFMAN 11-217, Vol 1*) *Flying Operations: Instrument Flight Procedures* (Vol. 1). (2010). Washington, D.C.: United States Air Force.
- (*AFTTP 3.3C-130J*) *Combat Aircraft Fundamentals: C-130J*. (2010). Nellis AFB: United States Air Force.
- (*AFTTP 3-3.C-130E/H*) *Combat Aircraft Fundamentals: C-130E/H*. (2010). Nellis AFB: United States Air Force.



- (TO 1C-130(K)H-1, Change 7) *Flight Manual: USAF Series C-130H Aircraft AF92-0547 Through AF92-1538 and AF92-3281 and Up.* (2010). Washington, D.C.: United States Air Force.
- (TO 1C-130(M)H-1, Change 17) *Flight Manual: USAF Series MC-130H Aircraft.* (2013). Washington, D.C.: United States Air Force.
- (TO 1C-130E(H)-1, Change 1) *Flight Manual: USAF Series C-130E, C-130H, EC-130E and WC-130H Aircraft.* (2009). Washington, D.C.: United States Air Force.
- (TO 1C-130H-1) *Flight Manual: USAF Series C-130H, AF73-01597, AF73-01598, AF74-01658 Through AF91-9144 and AF92-3021 Through AF92-3024.* (2010). Washington, D.C.: United States Air Force.
- (TO 1C-130J-1, Change 5) *Flight Manual: USAF Series C-130J Aircraft.* (2009). Washington, D.C.: United States Air Force.
- 57th Fighter Wing. (1986). *Intraflight command, control, and communications symposium final report.* Nellis AFB: United States Air Force.
- Adams, M. J., & Pew, R. W. (1990). Situational Awareness in the Commercial Aircraft Cockpit: A Cognitive Perspective. *Digital Avionics System Conference* (pp. 519-520). Cambridge: IEEE.
- AFRL. (2002). *Effects of Primary Flight Symbolology on Workload and Situation Awareness in a Head-Up Synthetic Display.* Wright-Patterson AFB: Air Force Research Laboratory.
- Alion Science. (2013). IMPRINT Pro (version 4.1.250.0). Army Research Laboratory.
- Aretz, A., Guardino, A., Porterfield, T., & McClain, J. (1986). Expert System Advice: How Should It Be Given. *Proceedings of the Human Factors Society - 30th Annual Meeting.*
- BEA. (2012). *Final Report On the accident on 1st June 2009 to the Airbus A330-203 registered F-GZCP operated by Air France flight AF 447 Rio de Janeiro-Paris.* Le Bourget: Bureau d'Enquetes et d'Analyses.
- Bierbaum, C. R., Szabo, S. M., & Aldrich, T. B. (1989). *Task Analysis of the UH-60 Mission and Decision Rules for Developing a UH-60 Workload Prediction Model.* Fort Rucker: US Army Research Institute for the Behavioral and Social Sciences.

- Billings, C. E. (1991). *Human-centered aircraft automation: A concept and guidelines*. Moffett Field: NASA Ames Research Center.
- Bolstad, C. A., & Endsley, M. R. (1990). *Single versus dual scale range display investigation*. Hawthorne, CA: Northrop Corp.
- Boyd, J. R. (1995, June 28). *The Essence of Winning and Loosing*. (C. Richards, & C. Spinney, Eds.) Retrieved January 4, 2015, from John Boyd Compendium: [http://pogoarchives.org/m/dni/john\\_boyd\\_compendium/essence\\_of\\_winning\\_losing.pdf](http://pogoarchives.org/m/dni/john_boyd_compendium/essence_of_winning_losing.pdf)
- Boys, R., & Palko, K. (1988). Automation and Dynamic Allocation: Engineering Issues and Approaches. *IEEE National Aerospace and Electronics Conference (NAECON)*. IEEE.
- Brockman, J. M. (2010). *Optimizing Combat Basic Aircrew Employment*. Nellis AFB: United States Air Force Weapons School.
- Burgess, J. E. (2005). *J-Model, An Updated C-130, An Updated Plan*. Little Rock AFB: United States Air Force Mobility Weapons School.
- Cassenti, D. N., Kelley, T. D., & Carlson, R. A. (2010). Modeling the Workload-Performance Relationship. *Proceedings of the Human Factors and Ergonomics Society Annual Meeting* (pp. 1684-1688). Human Factors and Ergonomics Society.
- Cassenti, D., & Kelley, T. (2006). Towards the shape of mental workload. *Proceedings of the Human Factors and Ergonomics Society 50th Annual Meeting*. Santa Monica: Human Factors and Ergonomics Society.
- Childress, M., Hart, S., & Bortolussi, M. (1982). The reliability and validity of flight workload ratings. *Proceedings of the Human Factors Society 26th Annual Meeting*. Seattle: Human Factors Society.
- Colombi, J. M., Miller, M. E., Schneider, M., McGrogan, J., Long, D. S., & Plaga, J. (2011, April 26). *Predictive Mental Workload Modeling for Semiautonomous System Design: Implications for Systems of Systems*. Retrieved November 12, 2012, from Wiley Online Library: [wileyonlinelibrary.com](http://wileyonlinelibrary.com)
- Cooke, N. J., Stout, R., & Salas, E. *A Knowledge Elicitation Approach to the Measurement of Team Situation Awareness*. Las Cruces: New Mexico State University.

- Cooper, G. E., & Harper, R. P. (1969). *The Use of Pilot Rating in the Evaluation of Aircraft Handling Qualities*. Moffett Field: NASA Ames Research Center.
- Cosenzo, K. A., Parasuraman, R., Novak, A., & Barnes, M. (2006). *Implementation of Automation for Control of Robotic Systems*. Aberdeen Proving Ground: Army Research Laboratory.
- Cowan, N. (1988). Evolving conceptions of memory storage, selective attention, and their mutual constraints within the human information processing system. *Psychological Bulletin* , 104 (2), 163-191.
- Curry, R. E., Jex, H., Levison, W., & Stassen, H. (1979). Final report of the control engineering group. In N. Moray (Ed.), *Mental Workload: Its Theory and Measurement* (pp. 235-254). New York: Plenum Press.
- Danaher, J. W. (1980). Human Error in ATC system operations. *Human Factors* , 22 (5), 535-545.
- Delgado, J. (2014, 12 28). (D. Meyer, Interviewer)
- Diamond, D. M., Campbell, A. M., Park, C. R., Halonen, J., & Zoladz, P. R. (2007). The temporal dynamics model of emotional memory processing: a synthesis on the neurobiological basis of stress-induced amnesia, flashback and traumatic memories, and the Yerkes-Dodson law. *Neural Plasticity* .
- Edwards, E. (1988). Introductory Overview. In E. L. Wiener, & D. C. Nagel, *Human Factors in Aviation*. Academic Press.
- Einhorn, H. J., & Hogwarth, R. M. (1981). Behavioral Decision Theory: Processes of Judgement and Choice. *Annual Review of Psychology* , 32, 53-88.
- Endsley, M. R. (1988c). *A construct and its measurement: The functioning and evaluation of pilot situation awareness*. Hawthorne: Northrop Corporation.
- Endsley, M. R. (1994). A taxonomy of situation awareness errors. *21st Conference, Western European Association of Aviation Psychology*. Dublin: Western European Association of Aviation Psychology.
- Endsley, M. R. (1996). Automation and Situation Awareness. In R. Parasuraman, & M. Mouloua, *Automation and human performance: Theory and applications* (pp. 163-181). Mahwah, NJ: Lawrence Erlbaum.

- Endsley, M. R. (2000). Direct Measurement of Situation Awareness: Validity and Use of SAGAT. *Situation Awareness Analysis and Measurement*, Mahwah, NJ.
- Endsley, M. R. (1995b). Measurement of Situation Awareness in Dynamic Systems. *Human Factors: The Journal of Human Factors and Ergonomics Society*, 37 (1), 65-84.
- Endsley, M. R. (1990a). Predictive utility of an objective measure of situation awareness. *Proceedings of the Human Factors Society 34th Annual Meeting* (pp. 41-45). Santa Monica: Human Factors and Ergonomics Society.
- Endsley, M. R. (1993). Situation awareness and workload: Flip sides of the same coin. *Proceedings of the Seventh International Symposium on Aviation Psychology*, (pp. 906-911).
- Endsley, M. R. (1988a). Situation Awareness Global Assessment Technique. *Proceedings of the IEEE 1988 National Aerospace and Electronics Conference: NAECON 1988*, 3, pp. 789-795. Dayton: IEEE.
- Endsley, M. R. (1999). Situation Awareness In Aviation Systems. In G. D. J., J. A. Wise, & H. V. D., *Handbook of Aviation Human Factors* (pp. 257-276). Mahwah, NJ: Lawrence Erlbaum Associates.
- Endsley, M. R. (1990b). *Situation awareness in dynamic human decision making: Theory and Measurement*. Los Angeles: University of Southern California.
- Endsley, M. R. (1989). *Tactical simulation 3 test report: Addendum I, situation awareness evaluations*. Hawthorne, CA: Northrop Corp.
- Endsley, M. R. (1988b). The Application of Human Factors to the Development of Expert Systems for Advanced Cockpits. *Proceedings of the Human Factors Society - 32nd Annual Meeting*.
- Endsley, M. R. (1995a). Toward a Theory of Situation Awareness in Dynamic Systems. *Human Factors* (37), 32-64.
- Endsley, M. R., & Kiris, E. O. (1995). The Out-of-the-Loop Performance Problem and Level of Control in Automation. *Human Factors*, 37 (2), 381-394.
- Endsley, M. R., Selcon, S. J., Hardiman, T. D., & Croft, D. G. (1998). A comparative analysis of SAGAT and SART for evaluations of situation awareness. *Proceedings*

*from the 42nd Annual Meeting of the Human Factors & Ergonomic Society*. Chicago: Human Factors and Ergonomics Society.

Everhart, C. D. (2010). *United States Air Force Aircraft Accident Investigation Board Report: C-17A, T/N 00-0173*. Joint Base Elmendorf-Richardson: Pacific Air Forces.

FAA. (n.d.). *Lessons Learned: Air Inter A320 at Strasbourg*. Retrieved January 3, 2015, from Federal Aviation Administration:  
[http://lessonslearned.faa.gov/ll\\_main.cfm?TabID=2&LLID=57&LLTypeID=2](http://lessonslearned.faa.gov/ll_main.cfm?TabID=2&LLID=57&LLTypeID=2)

Fracker, M. L. (1989). Attention gradiness in situation awareness. *Situational Awareness in Aerospace Operations* , 6/1-6/10.

Fracker, M. L., & Davis, S. A. (1990). Measuring operator situation awareness and mental workload. *Fifth Mid-Central Ergonomics/Human Factors Conference*. Dayton: Human Factors Society.

Frampton, J. B. (2009). *Airdrop Contingencies in the C-130J: PI Changes, VIRS, and GPS Jamming*. Little Rock AFB: United States Air Force Weapons School.

GAO. (2014). *Defense Acquisitions: Assessment of Institute for Defense Analyses' C-130 Avionics Modernization Program Analysis*. Washington, D.C.: U.S. Government Accountability Office.

Goodman, M. J., Tuerina, L., Bents, F. D., & Wherewille, W. (1999). Using cellular telephones in vehicles safe or unsafe? *Transportation Human Factors* , 3-42.

Hall, J. (1996, October 16). *NTSB Safety Recommendation: A-96-90 through -106*. Retrieved January 3, 2015, from National Transportation Safety Board:  
[http://www.nts.gov/safety/safety-recs/RecLetters/A96\\_90\\_106.pdf](http://www.nts.gov/safety/safety-recs/RecLetters/A96_90_106.pdf)

Harriott, C. E., Zhang, T., & Adams, J. A. (2011). *Evaluating the Applicability of Current Models of Workload to Peer-based Human-robot Teams*. Nashville: Vanderbilt University.

Harriott, C. E., Zhang, T., & Adams, J. A. (2010). *Predicting and Validating Workload in Human-Robot Teams*. Nashville: Vanderbilt University.

Harriott, C. E., Zhuang, R., Adams, J. A., & DeLoach, S. A. (2012). *Towards Using Human Performance Moderator Functions in Human-Robot Teams*. Nashville: Vanderbilt University.

- Hart, S. G. (1988). Helicopter Human Factors. In E. L. Wiener, & D. C. Nagel (Eds.), *Human Factors in Aviation*. Academic Press.
- Hart, S. G. (1986). The Relationship Between Workload and Training: An Introduction. *Proceedings of the Human Factors Society - 30th Annual Meeting*.
- Hart, S. G., & Sheridan, T. B. (1984). *Pilot Workload, Performance, and Aircraft Control Automation*. Ames Research Center. Moffett Field: National Aeronautics and Space Administration.
- Hart, S. G., & Staveland, L. E. (1988). *Development of NASA-TLX (Task Load Index): Results of Empirical and Theoretical Research*. Moffett Field: NASA-Ames Research Center.
- Hartel, C. E., Smith, K., & Prince, C. (1991). Defining aircrew coordination: Searching mishaps for meaning. *Sixth International Symposium on Aviation Psychology*. Columbus.
- Hauser, J. R., Childress, M. E., & Hart, S. G. (1982). Ratings consistency and component salience in subjective workload estimation. *Proceedings of the 18th Annual Conference on Manual Control*. Dayton: Wright-Patterson AFB.
- Haynes, W. (1998). *Validating the Need for a Heads Up Display in the C-130 Avionics Modernization Program*. Little Rock AFB: Combat Aerial Delivery School.
- Hebb, D. (1955). Drives and the C.N.S. (conceptual nervous system). *Psychological Review*, 62 (4), 243-254.
- Hendrickson, J. D. (2008). *JPADS and the J-model: Maximizing the Capabilities of the Aircraft and the Crew*. Little Rock AFB: United States Air Force Weapons School.
- Hermann, D. J. (1984). Questionnaires about memory. In J. E. Harris, & P. E. Morris (Eds.), *Everyday memory, action and absent-mindedness* (pp. 133-151). London: Academic Press.
- Higgins, T. J., & Chignell, M. H. (1988). Mental Models: A Fifth Paradigm? *Proceedings of the Human Factors Society - 32nd Annual Meeting*.
- Hinsley, D., Hayes, J., & Simon, H. (1977). From words to equations. In P. Carpenter, & M. Just (Eds.), *Cognitive processes in comprehension*. Hillsdale, NJ: Erlbaum.

- Hughes, E. R., Hassoun, J. A., & Ward, F. (1990). *Advanced tactical fighter (ATF) simulation support: Final report*. Wright-Patterson AFB: Air Force Systems Command, Aeronautical Systems Division.
- Hunn, B. P. (2006). *Unmanned Aerial System, New System Manning Prediction*. Aberdeen Proving Ground: U.S. Army Research Laboratory.
- Hunn, B. P., & Heuckeroth, O. H. (2006). *A Shadow Unmanned Aerial Vehicle (UAV) Improved Performance Research Integration Tool (IMPRINT) Model Supporting Future Combat Systems*. Aberdeen Proving Ground: Army Research Laboratory.
- Hunn, B. P., Schweitzer, K. M., Cahir, J. A., & Finch, M. M. (2008). *IMPRINT Analysis of an Unmanned Air System Geospatial Information Process*. Aberdeen Proving Ground: Army Research Laboratory.
- Johnson, R. D., Bersheder, D., & Leifer, L. (1983). Autonomy and the Human Element in Space: Executive Summary. *Report of the 1983 NASA/ASEE Summer Faculty Workshop*. Stanford: Stanford University.
- Jones, R. A. (1977). *Self-fulfilling prophecies: Social, psychological and physiological effects of expectancies*. Hillsdale: Erlbaum.
- Jorna, P. (1991). *Heart Rate Variability as an Index for Pilot Workload*. Amsterdam: National Aerospace Laboratory NLR.
- Kaempf, G., Wolf, S., & Miller, T. (1993). Decision making in the AEGIS combat information center. *Proceedings of the Human Factors and Ergonomics Society* (pp. 1107-1111). Santa Monica: Human Factors and Ergonomics Society.
- Kahneman, D. (1973). *Attention and Effort*. Englewood Cliffs: Prentice-Hall.
- Kantowitz, B. H., & Casper, P. A. (1988). Human Workload in Aviation. In E. L. Wiener, & D. C. Nagel (Eds.), *Human Factors in Aviation*. Academic Press.
- Kantowitz, B., & Sorkin, R. (1983). *Human factors: Understanding people-system relationships*. New York: John Wiley & Sons.
- Kennedy, W. (2015, 04 22). (D. R. Meyer, Interviewer)
- Klein, G. A. (1989a). Do decision biases explain too much? *Human Factors Society Bulletin*, 32 (5), 1-3.

- Klein, G. A. (1989b). Recognition-primed decisions. In W. Rouse (Ed.), *Advances in man-machine systems research* (pp. 47-92). Greenwich: JAI.
- Klein, G. A., Calderwood, R., & Clinton-Cirocco, A. (1986). Rapid Decision Making on the Fire Ground. *Proceedings of the Human Factors Society - 30th Annual Meeting*.
- Knowles, W. B. (1963). Operator loading tasks. *Human Factors* , 5, 151-161.
- Kramer, A. F. (1986). Interaction Between Workload and Training: Converging Evidence from Psychophysiology and Performance Measurement. *Proceedings of the Human Factors Society - 30th Annual Meeting*.
- Kramer, A. F. (1991). Physiological metrics of mental workload: a review of recent progress. In D. L. Damos (Ed.), *Multiple Task Performance* (pp. 279-328). Washington, D.C.: Taylor & Francis.
- Kuipers, A., Kappers, A., van Holten, C. R., van Bergen, J. H., & Gosterveld, W. V. (1989). Spatial disorientation incidents in the RNLAf F-16 and F-5 aircraft and suggestions for prevention. *Situation Awareness in Aerospace Operations* , OV-E-1--OV-E-16.
- Lanzetta, T. M., Warm, J. S., Dember, W. N., & Berch, D. B. (1985). Information Processing Load and the Event Rate Function in Sustained Attention. *Proceedings of the Human Factors Society - 29th Annual Meeting*.
- LaVine, N. (2010). *C-130J Workload Analysis Study*. Boulder: Alion Science and Technology.
- Linson, P. A. (2010). *C-130 Use of Situational Awareness Data Link (SADL) and its Function Related to Time Sensitive Airdrop*. Little Rock AFB: United States Air Force Weapons School.
- Little, R., Dahl, S., Plott, B., Wickens, C., J, P., Tillman, B., et al. (1993). *Crew reduction in armored vehicles ergonomic study (CRAVES)*. Aberdeen Proving Ground: US Army Research Laboratory.
- Lockheed-Martin. (2005, June 13). *Outstanding Performance and Reliability of the C-130J Transforms Tactical Airlift Operations*. Retrieved from Lockheed-Martin: <http://www.lockheedmartin.com/wms>



- Logan, G. D. (1988). Automacity, resources and memory: Theoretical controversies and practical implications. *Human Factors* (30), 583-598.
- Loukopoulos, L., Dismukes, R. K., & Barshi, I. (2009). The Perils of Multitasking. *Human Factors* , 18-23.
- Lovesey, J. (1995). Information Overload in the Cockpit. *IEEE Colloquium on Information Overload* (pp. 5/1-5/5). London: IEEE.
- Mao, M., Xie, F., Hu, J.-J., & Su, B. (2013). *Analysis of workload of tank crew under the conditions of informatization*. Beijing: China North Vehicle Research Institute.
- Martin, G. (1989). The utility of speech input in user-computer interfaces. *International Journal of Man-Machine System Study* , 18, 355-376.
- Martin, R. C., Wogalter, M. S., & Forland, J. G. (1988). Reading comprehension in the presence of unattended speech and music. *Journal of Memory and Language* , 382-398.
- McCarthy, G. W. (1988, May). Human factors in F-16 mishaps. *Flying Safety* , 17-21.
- McCracken, J. H., & Aldrich, T. B. (1984). *Analyses of Selected LHX Mission Functions: Implications for Operator Workload and System Automation Goals*. Fort Rucker: US Army Research Institute.
- McDaniel, K. R. (1996). *Awareness and Task Management in the Low-Level/Threat Environment*. Little Rock AFB: USAF Combat Aerial Delivery School.
- McDonnell Douglas Aircraft Corporation. (1982). *Advanced medium-range air-to-air missile operational utility evaluation (AMRAAM OUE) test final report*. St Louis: McDonnell Douglas.
- McDuffee, A. (2014, April 22). Pentagon's Superpowered Autopilot Will Do the Work of 5 Crew Members. *Wired* .
- McLeod, P. (1977). A dual-task response modality effect: support for multi-processor models of attention. *Quarterly Journal of Experimental Psychology* , 29, 651-667.
- Mitchell, D. K. (2000). *Mental Workload and ARL Workload Modeling Tools*. Aberdeen Proving Ground: Army Research Laboratory.

- Monto, M. T. (2001). *Wherever You Go, There You Are...But Are You Sure That Is Where You Want to Be? How to Improve Situational Awareness Aboard the C-130*. Little Rock AFB: Combat Aerial Delivery School.
- Mosier, K., & Chidester, T. (1991). Situation assessment and situation awareness in a team setting. In Y. Queinnec, & D. F. *Designing for everyone* (pp. 798-800). London: Taylor & Francis.
- Musser, M. L. (2013). *System Evolution with Technology: Analyzing Design Principles on the C-130*. Wright-Patterson AFB: Air Force Institute of Technology.
- NASA. (2014, December). Retrieved December 14, 2014, from Aviation Safety Reporting System: <http://asrs.arc.nasa.gov/search/database.html>
- NASA. (2015). *NASA TLX: Task Load Index*. Retrieved February 16, 2015, from Ames Research Center-Human Systems: <http://humansystems.arc.nasa.gov/groups/tlx/index.html>
- National Research Council. (1982). *Automation in Combat Aircraft*. Washington, D.C.: National Academy Press.
- Nelson, E. B., Dunavold, P. A., & Dickson, S. A. (2010). *C-130 Avionics Modernization Program Formation Airdrop Integrated System Evaluation*. Edwards AFB: Air Force Flight Test Center.
- Nielson, J. (2005). *RTIC for One? RTIC for All!! Combat Track II (CTII) / Airborne Broadcast Intelligence (ABI)*. Little Rock AFB: United States Air Force Mobility Weapons School.
- Nisbett, R. E., & Wilson, T. D. (1977). Telling more than we can know: Verbal reports on mental processes. *Psychological Review* , 231-259.
- Norman, D. A. (1989). *The problem of automation: Inappropriate feedback and interaction not overautomation*. La Jolla, CA: Institute for Cognitive Science-UC San Diego.
- Norman, D. A., & Bobrow, D. G. (1975). On Data-limited and Resource-limited Processes. *Cognitive Psychology* , 44-64.
- North, R. A., & Riley, V. A. (1989). A predictive model of operator workload. *Applications of human performance models to system design* , 81-90.

- Northrop Corp. (1988). *Tactical simulation 2 test report: Addendum I situation awareness test results*. Hawthorne, Ca: Northrop Corp.
- NTSB. (1988). *Aircraft accident report: Northwest Airlines, Inc., McDonnell-Douglas DC-9-82, N312RC, Detroit Metropolitan Wayne County Airport, August 16, 1987*. Washington, D.C.: National Transportation Safety Board.
- NTSB. (1990). *Aircraft accident report: US Air, Inc., Boeing 737-400, LaGuardia Airport, Flushing, New York, September 20, 1989*. Washington, D.C.: National Transportation Safety Board.
- NTSB. (1980). *Aircraft Incident Report: Aeromexico, DC-10-30, XA-DUH over Luxembourg, Europe, November 11, 1979*. Washington, D.C.: National Transportation Safety Board.
- NTSB. (2014). *Descent Below Visual Glidepath and Impact with Seawall: Asiana Airlines Flight 214, Boeing 777-200ER, HL7742, San Francisco, California July 6, 2013*. Washington, D.C.: National Transportation Safety Board.
- Olson, W. A., & Sarter, N. B. (1998). "As Long as I'm in Control...": Pilot Preferences for and Experiences with Different Approaches to Automation Management. *Proceedings from the Fourth Annual Human Interaction with Complex Systems* (pp. 63-72). Dayton: IEEE.
- Ortega, K. A. (1989). Problem Solving: Expert/Novice Differences. *HUMAN Factors Society Bulletin* , 32 (3), 1-5.
- Osinga, F. (2006). *Science, Strategy and War: The Strategic Theory of John Boyd*. London: Routledge.
- Oviedo, N. (2005, July 18). (J. E. Burgess, Interviewer)
- Paivio, A. (1971). *Imagery and verbal Processes*. New York: Reinhart & Wilson.
- Parasuraman, R. (1987). Human-computer monitoring. *Human Factors* , 29 (6), 695-706.
- Parasuraman, R., & Riley, V. (1997). Humans and Automation: Use, Misuse, Disuse, Abuse. *Human Factors* , 39 (2), 230-253.
- Parasuraman, R., Molloy, R., & Singh, I. L. (1993). Monitoring automation failures in human-machine systems. *International Journal of Aviation Psychology* , 3 (1), 1-23.

- Parasuraman, R., Mouloua, M., & Molloy, R. (1994). Monitoring automation failures in human-machine systems. In M. Mouloua, & R. Parasuraman, *Human performance in automated systems: Current research and trends* (pp. 203-211). Hillsdale, NJ: LEA.
- Parasuraman, R., Sheridan, T. B., & Wickens, C. D. (2000). A Model for Types and Levels of Human Interaction with Automation. *IEEE Transactions on Systems, Man, and Cybernetics--Part A: Systems and Humans* , 30 (3), 286-297.
- Pedersen, K. (2015, February 7). (D. R. Meyer, Interviewer)
- Pew, R. W. (1991). Defining and measuring situation awareness in the commercial aircraft cockpit. *Proceedings of the Conference on Challenges in Aviation Human Factors: The National Plan* (pp. 30-31). Washington, D.C.: American Institute of Aeronautics and Astronautics.
- Plott, C. C., Endsley, M. R., & Strater, L. D. (2004). Integrating SAGAT into human performance models. *Human Performance, Situation Awareness, and Trends* , 56 (1), 56-60.
- Polson, M. C., & A, F. (1988). Task-sharing within and between hemispheres: a multiple-resources approach. *Human Factors* , 30, 633-643.
- Pomranky, R. A. (2006). *Human Robotics Interaction Army Technology Objective Raven Small Unmanned Aerial Vehicle task Analysis and Modeling*. Aberdeen Proving Ground: Army Research Laboratory.
- Pomranky, R. A., & Wojciechowski, J. Q. (2007). *Determination of Mental Workload During Operation of Multiple Unmanned Systems*. Aberdeen Proving Ground: Army Research Laboratory.
- Poole, J. D. (2008). *Integrated Link 16 into C-130 Operations*. Little Rock AFB: United States Air Force Weapons School.
- Press Association. (2010, September 8). *Ryanair boss aims to axe 'unnecessary' co-pilots*. Retrieved November 30, 2014, from The Guardian:  
<http://www.theguardian.com/money/2010/sep/08/ryanair-axe-unnecessary-co-pilots>
- Press, M. (1986). *Situation awareness: Let's get serious about the clue-bird*.
- Rabbitt, R. (1998, Aug 20). (W. Haynes, Interviewer)

- Redenius, N. C. (2011). *Tactical Data Links and the MAF: NRT Information in Communication Limited or Denied Environments*. Little Rock AFB: United States Air Force Weapons School.
- Reid, G. B., & Nygren, T. (1988). The subjective workload assessment technique: A scaling procedure for measuring mental workload. (P. Hancock, & N. Mishkate, Eds.) *Human Mental Workload*.
- Reid, G. B., Potter, S. S., & Bressler, J. R. (1989). *Subjective Workload Assessment Technique (SWAT): A User's Guide (U)*. Wright-Patterson AFB: Air Force Systems Command.
- Rolfe, J. (1971). The secondary task as a measure of mental load. In W. Singleton, J. Fox, & D. Whitfield (Ed.), *Measurement of man at work*. London: Taylor and Francis.
- Rusnock, C. F., & Geiger, C. D. (2013). Using Discrete-Event Simulation for Cognitive Workload Modeling and System Evaluation. *IIE Annual Conference Proceedings* (pp. 2485-2494). Institute of Industrial Engineers.
- Rusnock, C. F., Borghetti, B. J., & McQuaid, I. W. (2015). Objective-Analytical Measures of Workload-The Third Pillar of Workload Triangulation. *Foundations of Augmented Cognition*. Los Angeles: 9th International Conference on Augmented Cognition.
- Sarno, K. J., & Wickens, C. D. (1995). The role of multiple resources in predicting time-sharing efficiencies. *International Journal of Aviation Psychology*, 107-130.
- Scheider, M. F., & McGrogan, J. D. (2011). *Architecture Based Workload Analysis of UAS Multi-Aircraft Control: Implications of Implementation on MQ-1B Predator*. Wright-Patterson AFB: Air Force Institute of Technology.
- Schnell, T., Macuda, T., Poolman, P., & Keller, M. (2006). *Workload Assessment in Flight Using Dense Array Egg*. IEEE.
- Secarea, J. V. (1990). Beyond Knobs and Dials: Towards and Intentional Model of Man-Machine Interaction. *Aerospace and Electronics Conference, Proceedings of the IEEE* (pp. 763-783). IEEE.
- Selcon, S. J., & Taylor, R. M. (1990). Evaluation of the situational awareness rating technique (SART) as a tool for the aircrew systems design. *Situational awareness in aerospace operations*, 5/1-5/8.

- Selcon, S. J., Taylor, R. M., & Koritsas, E. (1991). Workload or situational awareness?: TLX vs. SART for aerospace systems design evaluation. *Proceedings of the Human Factors Society 35th Annual Meetings* (pp. 62-66). Santa Monica: Human Factors Society.
- Sexton, B. B. (1998). *"Saddle Up Folks!" Situation Awareness Data Link (SADL)*. Little Rock AFB: Combat Aerial Delivery School.
- Sheridan, T. B. (1980, October). Computer control and human alienation. *Technology Review*.
- Sheridan, T. B., & Stassen, H. (1979). Definitions, models, & measures. In N. Moray (Ed.), *Mental Workload: Its Theory and Measurement* (pp. 219-234). New York: Plenum Press.
- Sheridan, T. B., & Verplank, W. L. (1978). *Human and computer control of undersea teleoperators*. Department of Mechanical Engineering, Man-Machine Systems Laboratory. Cambridge: Massachusetts Institute of Technology.
- Shinaberry, J. A. (2013, November 15). (D. R. Meyer, Interviewer)
- Siegel, B. K., & Keller, K. J. (1992). *Pilot Task Monitoring Using Neural Networks*. St. Louis: McDonnell Douglas.
- Slamecka, N. J., & Graf, P. (1978). The generation effect: Delineation of a phenomenon. *Journal of Experimental Psychology: Human Learning and Memory*, 4 (6), 592-604.
- Svensson, E., Angelborg-Thanderz, M., & Wilson, G. F. (1999). *Models of Pilot Performance for Systems and Mission Evaluation-Psychological and Psychophysiological Aspects*. Wright-Patterson AFB: Air Force Research Laboratory.
- Talley, M. A. (2012). *Calling the Audible: C-17 Data-Link Integration via Dynamic Re-tasking Capability (DRC)*. Nellis AFB: United States Air Force Weapons School.
- Tremblay, S., Breton, R., Vachon, F., & Allen. (2012). Support of Collaborative Work in Battlespace Management: Shared (Loss) of Situation Awareness. *2012 IEEE International Multi-Disciplinary Conference on Cognitive Methods in Situation Awareness and Decision Support* (pp. 214-217). New Orleans: IEEE.
- Tsang, P. S., & Wickens, C. D. (1988). The structural constraints and strategic control of resource allocation. *Human Performance*, 45-72.

- Tsang, P., & V, V. (1996). Diagnosticity and multidimensional subjective workload ratings. *Ergonomics* , 39 (3), 358-381.
- U.S. Air Force. (2003, September 1). *C-130 Hercules*. Retrieved December 4, 2014, from Official United States Air Force Website:  
<http://www.af.mil/AboutUs/FactSheets/Display/tabid/224/Article/104517/c-130-hercules.aspx>
- Veltman, J. A. (Ed.). (2001). *Decision support in the cockpit: literature review of Human Factors aspects*. Netherlands: Director of Air Force Research and Development.
- Venturino, M., Hamilton, W. L., & Dverchak, S. R. (1989). Performance-based measures of merit for tactical situation awareness. *Situation Awareness in Aerospace Operations* , 4/1-4/5.
- Vidulich, M. A. (1988). Speech responses and dual task performance better time-sharing or asymmetric transfer. *Human Factors* , 30, 517-534.
- von Tiesenhausen, G. (1982). *An Approach toward Function Allocation between Humans and Machines in Space Station Activities*. Washington, D.C.: NASA.
- Watson, D. W. (2001). *Physiological Correlates of Heart Rate Variability (HRV) and the subjective assessment of workload and fatigue in-flight crew: a practical study*. London: Imperial College of Science, Technology & Medicine.
- Wickens, C. D. (2002). Multiple resources and performance prediction. *Theoretical Issues in Ergonomics* , 3 (2), 159-177.
- Wickens, C. D. (1984). Processing Resources in Attention. *Varieties of Attention* , 63-101.
- Wickens, C. D. (1980). The structure of attentional resources. In R. Nickerson (Ed.), *Attention and Performance* (VIII ed., pp. 239-257). Hillsdale: Lawrence Erlbaum.
- Wickens, C. D., & Liu, Y. (1988). Codes and modalities in multiple resources: a success and a qualification. *Human Factors* , 599-616.
- Wickens, C. D., Dixon, S., & Chang, D. (2003). *Using Interference Models to Predict Performance in a Multiple-Task UAV Environment--2 UAVs*. Urbana-Champaign: University of Illinois.

- Wickens, C. D., Stokes, A. F., Barnett, B., & Hyman, F. (1988). Stress and Pilot Judgement: An Emperical Study Using MIDAS, A Microcomputer-Based Simulation. *Proceedings of the Human Factors Society - 32nd Annual Meeting*.
- Wiener, E. L. (1985a). Beyond the Sterile Cockpit. *Human Factors* , 27 (1), 75-90.
- Wiener, E. L. (1985b). Cockpit automation: In need of a philosophy. *Proceedings of the 1985 Behaviorall Engineering Conference* (pp. 369-375). Warrendale, PA: Society of Automotive Engineers.
- Wiener, E. L. (1989). Reflections on Human Error: Matters of Life and Death. *Proceedings of the Human Factors Society Annual Meeting*. 33, pp. 1-7. SAGE Publications.
- Wiener, E. L., & Curry, R. E. (1980). *Flight-deck Automation: Promises and Problems*. Washington, D.C.: NASA.
- Wilson, G. F. (2001). *An Analysis of Mental Workload in Pilots During Flight Using Multiple Psychophysiological Measures*. Wright-Patterson AFB: Air Force Research Laboratory.
- Wilson, G. F. (1991). *Progress in the Psychophysiological Assessment of Workload*. Wright-Patterson AFB: Armstrong Laboratory.
- Wojciechowski, J. Q. (2006). *Validation of a Task Network Human Performance Model of Driving*. Blacksburg: Virginia Polytechnic Institute and State University.
- Yerkes, R. M., & Dodson, J. D. (1908). The Relation of Strength of Stimulus to Rapidity of Habit-Formation. *Journal of Comparative Neurology and Psychology* , 18, 459-482.



| <b>REPORT DOCUMENTATION PAGE</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                      |                                          |                                             | <i>Form Approved</i><br>OMB No. 074-0188                                    |                                                                                                       |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|------------------------------------------|---------------------------------------------|-----------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|--|
| <p>The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of the collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.</p> <p><b>PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                    |                      |                                          |                                             |                                                                             |                                                                                                       |  |
| <b>1. REPORT DATE</b> (DD-MM-YYYY)<br>24-12-2015                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                      | <b>2. REPORT TYPE</b><br>Master's Thesis |                                             | <b>3. DATES COVERED</b> (From – To)<br>October 2010 – November 2015         |                                                                                                       |  |
| <b>4. TITLE AND SUBTITLE</b><br>Effects of Automation on Aircrew Workload and Situation Awareness in Tactical Airlift Missions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                      |                                          |                                             | <b>5a. CONTRACT NUMBER</b><br>N/A                                           |                                                                                                       |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                      |                                          |                                             | <b>5b. GRANT NUMBER</b><br>N/A                                              |                                                                                                       |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                      |                                          |                                             | <b>5c. PROGRAM ELEMENT NUMBER</b><br>N/A                                    |                                                                                                       |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                      |                                          |                                             | <b>5d. PROJECT NUMBER</b><br>N/A                                            |                                                                                                       |  |
| <b>6. AUTHOR(S)</b><br>Meyer, David R., Captain, USAF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                      |                                          |                                             | <b>5e. TASK NUMBER</b><br>N/A                                               |                                                                                                       |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                      |                                          |                                             | <b>5f. WORK UNIT NUMBER</b><br>N/A                                          |                                                                                                       |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                      |                                          |                                             |                                                                             |                                                                                                       |  |
| <b>7. PERFORMING ORGANIZATION NAMES(S) AND ADDRESS(S)</b><br>Air Force Institute of Technology<br>Graduate School of Engineering and Management (AFIT/EN)<br>2950 Hobson Way, Building 640<br>WPAFB OH 45433-7765                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                      |                                          |                                             | <b>8. PERFORMING ORGANIZATION REPORT NUMBER</b><br><br>AFIT-ENV-MS-15-D-020 |                                                                                                       |  |
| <b>9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)</b><br>Intentionally Left Blank                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                      |                                          |                                             | <b>10. SPONSOR/MONITOR'S ACRONYM(S)</b><br><br>                             |                                                                                                       |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                      |                                          |                                             | <b>11. SPONSOR/MONITOR'S REPORT NUMBER(S)</b><br><br>                       |                                                                                                       |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                      |                                          |                                             |                                                                             |                                                                                                       |  |
| <b>12. DISTRIBUTION/AVAILABILITY STATEMENT</b><br>DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                      |                                          |                                             |                                                                             |                                                                                                       |  |
| <b>13. SUPPLEMENTARY NOTES</b><br>This material is declared a work of the U.S. Government and is not subject to copyright protection in the United States                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                      |                                          |                                             |                                                                             |                                                                                                       |  |
| <b>14. ABSTRACT</b><br>In tactical aviation, decision superiority brought upon by high situation awareness remains the arbiter of combat effectiveness. The advancement of sophisticated avionics and highly automated cockpits has allowed for the reduction of aircrew size, and in certain platforms, removal of the crew from the aircraft entirely. However, these developments have not reduced the complex and dynamic interaction between situation awareness and crew workload. While many predictive and experimental methods of evaluating workload exist, situation awareness can only be measured by conducting trials with human operators in a functional prototype. This thesis proposes an innovative methodology to predicatively determine situation awareness potential with discrete-event simulation software. This methodology measures situation awareness as both a function of task accomplishment and workload experienced. Utilizing two common but complex tactical scenarios, this method and existing workload measurement techniques can derive a direct comparison between a reduced-crew highly automated cockpit and a less automated "legacy" aircraft. Finally, conclusions regarding the effectiveness of replacing human operators with automation in tactical events can be made and tested in future experiments with actual aircraft and aircrews. |                      |                                          |                                             |                                                                             |                                                                                                       |  |
| <b>15. SUBJECT TERMS</b><br>C-130, workload, situation awareness, pilot, cockpit design, aircrew, discrete event simulation (DES), IMPRINT, station keeping equipment (SKE), airdrop, airland, VACP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                      |                                          |                                             |                                                                             |                                                                                                       |  |
| <b>16. SECURITY CLASSIFICATION OF:</b><br>UNCLASSIFIED                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                      |                                          | <b>17. LIMITATION OF ABSTRACT</b><br><br>UU | <b>18. NUMBER OF PAGES</b><br><br>273                                       | <b>19a. NAME OF RESPONSIBLE PERSON</b><br>Rusnock, Christina R., Maj, Ph.D, USAF                      |  |
| a. REPORT<br><br>U                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | b. ABSTRACT<br><br>U | c. THIS PAGE<br><br>U                    |                                             |                                                                             | <b>19b. TELEPHONE NUMBER</b> (Include area code)<br>(937) 255-6565, x 4611 Christina.rusnock@afit.edu |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                      |                                          |                                             |                                                                             |                                                                                                       |  |